勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

IXYS

HiPerFET™ Power MOSFETs Q-CLASS

Single MOSFET Die

	V_{DSS}	I_{D25}	$R_{DS(on)}$
IXFK/IXFX 48N50Q	500 V	48 A	100 mΩ
IXFK/IXFX 44N50Q	500 V	44 A	120 mΩ

$t_{rr} \leq 250$ ns

N-Channel Enhancement Mode
Avalanche Rated, Low Qg
High dV/dt, Low t_{rr}



PLUS 247™ (IXFX)



TO-264 AA (IXFK)



G = Gate D = Drain
S = Source TAB = Drain

Symbol	Test Conditions		Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C		500	V
V_{DGR}	T_J = 25°C to 150°C; R_{GS} = 1 MΩ		500	V
V_{GS}	Continuous		±20	V
V_{GSM}	Transient		±30	V
I_{D25}	T_C = 25°C	44N50	44	A
		48N50	48	A
I_{DM}	T_C = 25°C, pulse width limited by T_{JM}	44N50	176	A
		48N50	192	A
I_{AR}	T_C = 25°C		48	A
E_{AR}	T_C = 25°C		60	mJ
E_{AS}	T_C = 25°C		2.5	J
dv/dt	$I_S \leq I_{DM}$, di/dt ≤ 100 A/µs, $V_{DD} \leq V_{DSS}$ $T_J \leq$ 150°C, R_G = 2 Ω		15	V/ns
P_D	T_C = 25°C		500	W
T_J			-55 ... +150	°C
T_{JM}			150	°C
T_{stg}			-55 ... +150	°C
T_L	1.6 mm (0.063 in.) from case for 10 s		300	°C
M_d	Mounting torque	TO-264	0.4/6	Nm/lb.in.
Weight		PLUS 247	6	g
		TO-264	10	g

Symbol	Test Conditions		Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
V_{DSS}	V_{GS} = 0 V, I_D = 250uA		500			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 4mA		2.0		4.0	V
I_{GSS}	V_{GS} = ±20 V, V_{DS} = 0				±100	nA
I_{DSS}	$V_{DS} = V_{DSS}$ V_{GS} = 0 V				100	µA
		T_J = 125°C			2	mA
$R_{DS(on)}$	V_{GS} = 10 V, $I_D = 0.5 \cdot I_{D25}$ Note 1	44N50			120	mΩ
		48N50			100	mΩ

Features

- IXYS advanced low Q_g process
- Low gate charge and capacitances
  - easier to drive
  - faster switching
- International standard packages
- Low $R_{DS(on)}$
- Rated for unclamped Inductive load switching (UIS) rated
- Molding epoxies meet UL 94 V-0 flammability classification

Applications

- DC-DC converters
- Battery chargers
- Switched-mode and resonant-mode power supplies
- DC choppers
- AC motor control
- Temperature and lighting controls

Advantages

- PLUS 247™ package for clip or spring mounting
- Space savings
- High power density

© 2003 IXYS All rights reserved

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
g_{fs}	V_{DS} = 10 V; I_D = 0.5 • I_{D25} Note 1	30	42		S
C_{iss}	V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz		7000		pF
C_{oss}			960		pF
C_{rss}			230		pF
$t_{d(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		33		ns
t_r	R_G = 1 Ω (External),		22		ns
$t_{d(off)}$			75		ns
t_f			10		ns
$Q_{g(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		190		nC
Q_{gs}			40		nC
Q_{gd}			86		nC
R_{thJC}				0.26	K/W
R_{thCK}			0.15		K/W

Source-Drain Diode — Characteristic Values (T_J = 25°C, unless otherwise specified)

Symbol	Test Conditions	min.	typ.	max.	
I_S	V_{GS} = 0 V			48	A
I_{SM}	Repetitive; pulse width limited by T_{JM}			192	A
V_{SD}	$I_F = I_S$, V_{GS} = 0 V, Note 1			1.5	V
t_{rr}	I_F = 25A,-di/dt = 100 A/µs, V_R = 100 V			250	ns
Q_{RM}			1.0		µC
I_{RM}			10		A

Note: 1. Pulse test, t ≤ 300 µs, duty cycle d ≤ 2 %

PLUS 247™ Outline

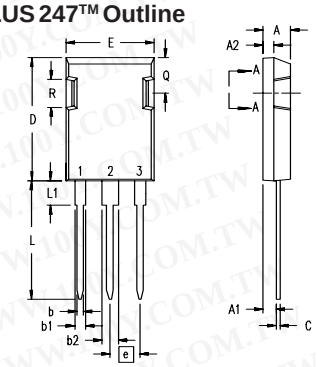

Terminals: 1 - Gate
2 - Drain (Collector)
3 - Source (Emitter)
4 - Drain (Collector)

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.83	5.21	.190	.205
A_1	2.29	2.54	.090	.100
A_2	1.91	2.16	.075	.085
b	1.14	1.40	.045	.055
b_1	1.91	2.13	.075	.084
b_2	2.92	3.12	.115	.123
C	0.61	0.80	.024	.031
D	20.80	21.34	.819	.840
E	15.75	16.13	.620	.635
e	5.45 BSC		.215 BSC	
L	19.81	20.32	.780	.800
L1	3.81	4.32	.150	.170
Q	5.59	6.20	.220	0.244
R	4.32	4.83	.170	.190

TO-264 AA Outline



Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.82	5.13	.190	.202
A1	2.54	2.89	.100	.114
A2	2.00	2.10	.079	.083
b	1.12	1.42	.044	.056
b1	2.39	2.69	.094	.106
b2	2.90	3.09	.114	.122
c	0.53	0.83	.021	.033
D	25.91	26.16	1.020	1.030
E	19.81	19.96	.780	.786
e	5.46 BSC		.215 BSC	
J	0.00	0.25	.000	.010
K	0.00	0.25	.000	.010
L	20.32	20.83	.800	.820
L1	2.29	2.59	.090	.102
P	3.17	3.66	.125	.144
Q	6.07	6.27	.239	.247
Q1	8.38	8.69	.330	.342
R	3.81	4.32	.150	.170
R1	1.78	2.29	.070	.090
S	6.04	6.30	.238	.248
T	1.57	1.83	.062	.072

IXYS reserves the right to change limits, test conditions, and dimensions.

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

Fig. 1. Output Characteristics @ 25 Deg. C

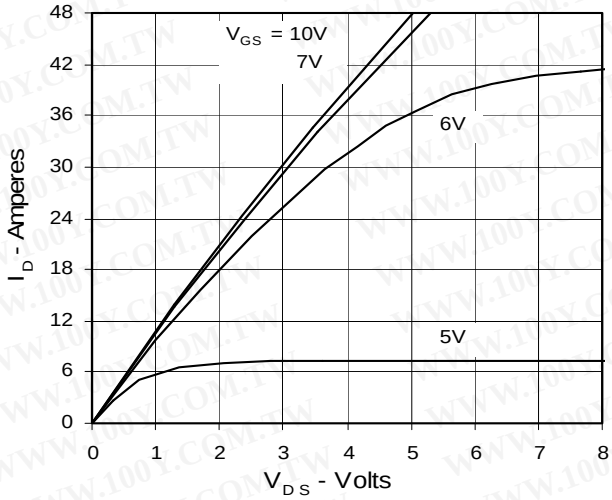

Fig. 2. Extended Output Characteristics @ 25 deg. C

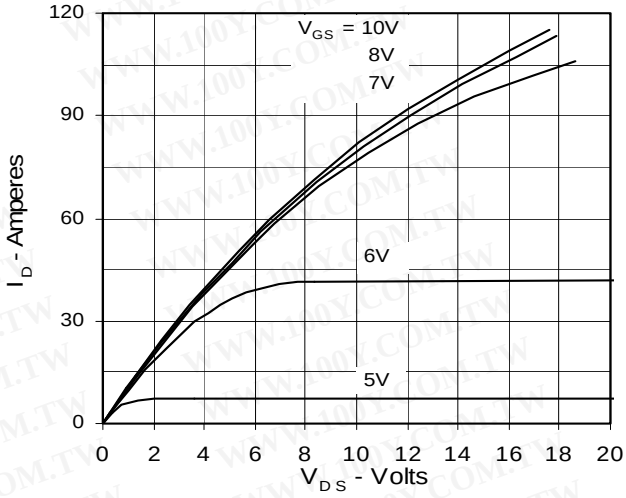

Fig. 3. Output Characteristics @ 125 Deg. C

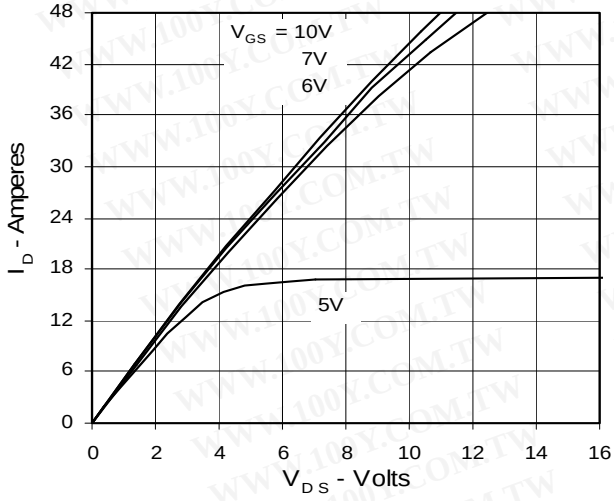

Fig. 4. $R_{DS(on)}$ Normalized to I_{D25} Value vs. Junction Temperature

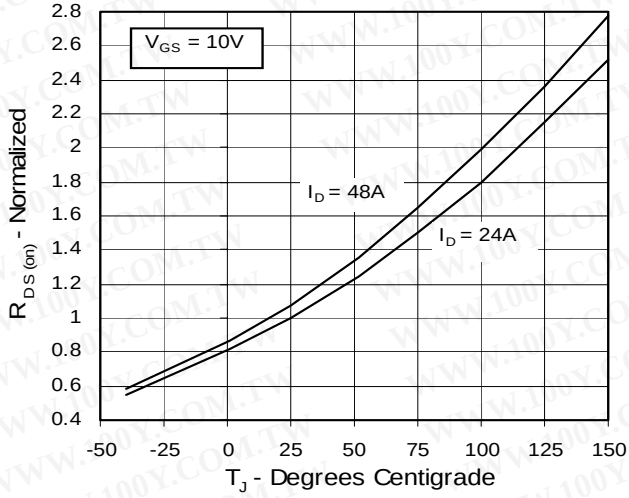

Fig. 5. $R_{DS(on)}$ Normalized to I_{D25} Value vs. I_D

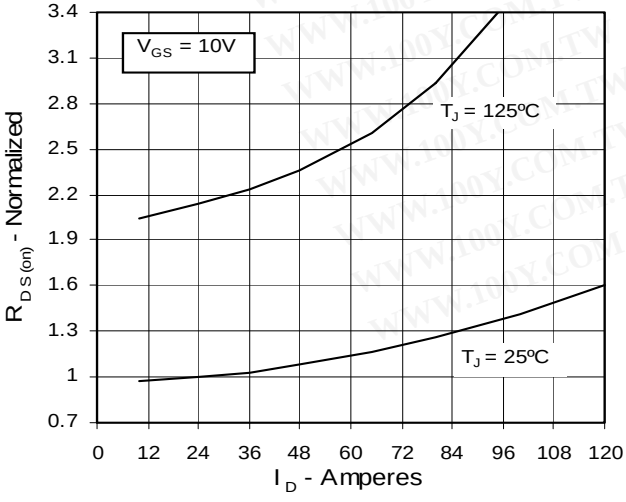

Fig. 6. Drain Current vs. Case Temperature

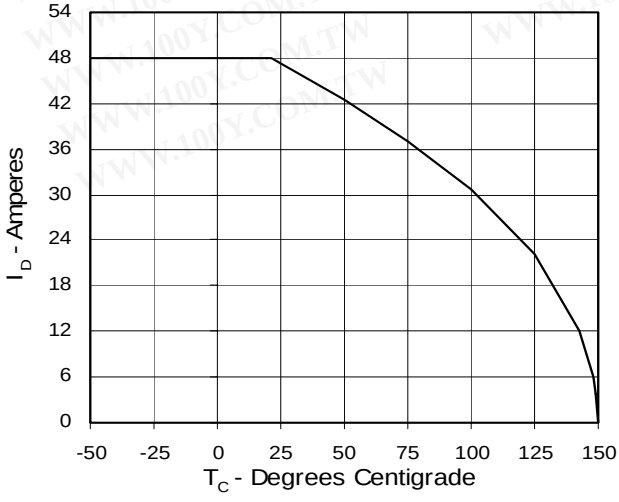

© 2003 IXYS All rights reserved

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

Fig. 7. Input Admittance

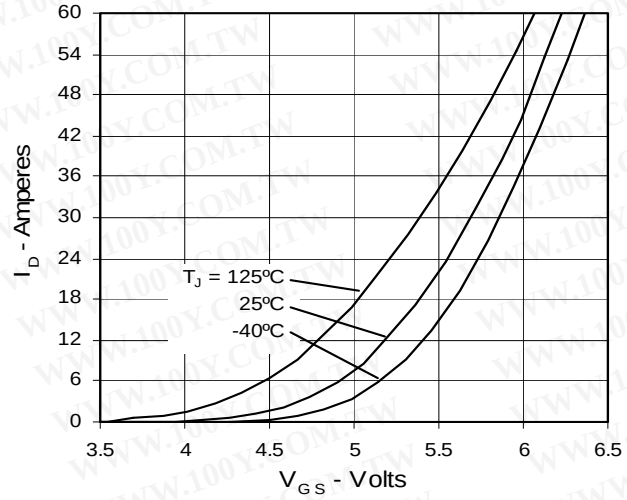

Fig. 8. Transconductance

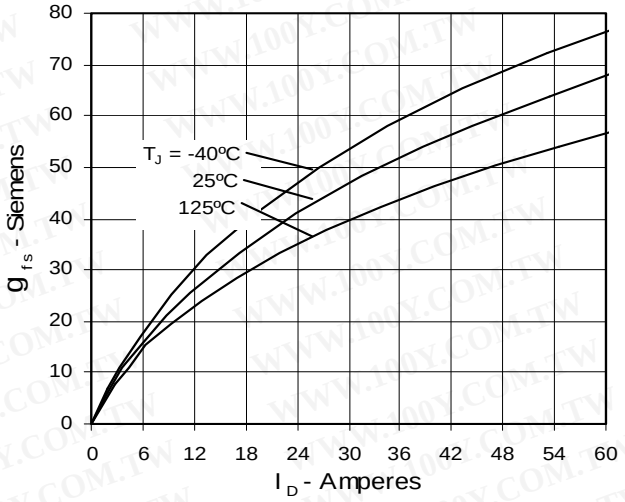

Fig. 9. Source Current vs. Source-To-Drain Voltage

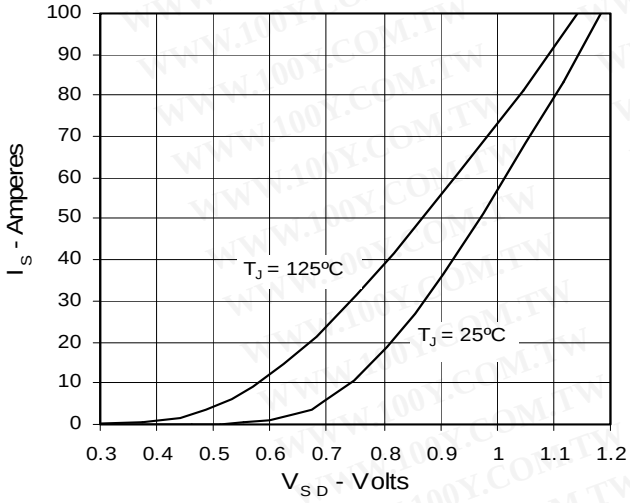

Fig. 10. Gate Charge

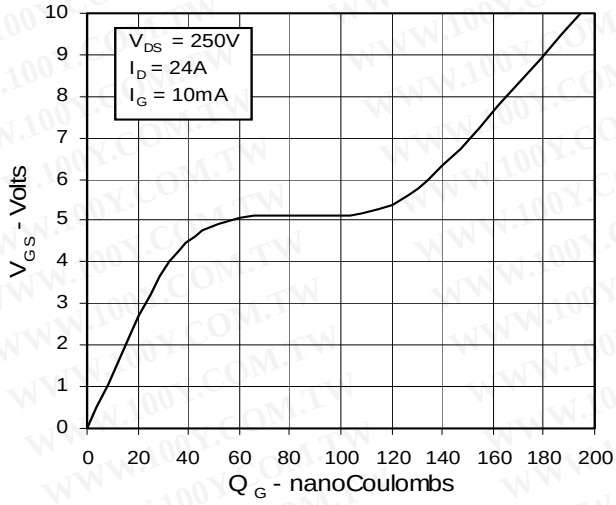

Fig. 11. Capacitance

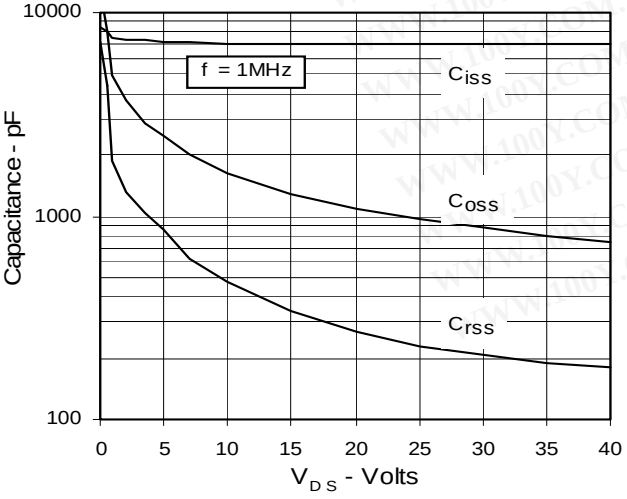

Fig. 12. Maximum Transient Thermal Resistance

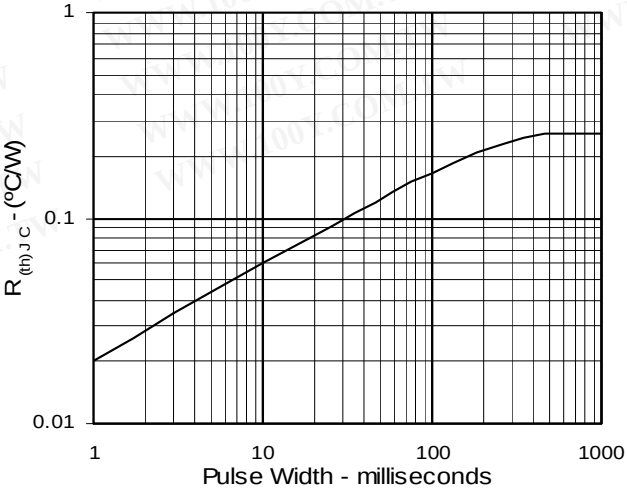

IXYS reserves the right to change limits, test conditions, and dimensions.