


JS-606 SERIES (S.P. Mini Rocker Switch)

Specifications:

- Rating: K:6A 125VAC/3A 250 VAC (UL CSA)
H:10A 125 VAC/6A 250 VAC (UL~KEMA)
L:5A 125 L(Inrush Current 80A)
T:16A 125 VAC/10A 250 VAC T105

- Contact Resistance: 20mΩ (max.)
- Insulation Resistance: DC 500V 100MΩ (min.)
- Dielectric Strength: 1500VAC/1 Minute
- Safety Approval:

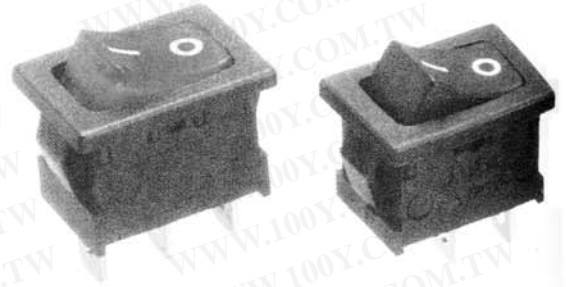

JS-606 — — — — **Rating**

6A	10A	5AL	16A
K	H	L	T

Circuit

A	2P ON-OFF
B	3P ON-ON
C	3P ON-OFF-ON
D	2P (ON)-OFF
E	2P ON-(OFF)
F	3P (ON)-ON
I	2P Indicator
L	4P With LED
AL	3P illuminated

Stamp

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16

Color Rocker/Housing

Black	White	Red	Green	Ivory	Gray	Slate Gray	Yellow
B	W	R	G	I	H	S	Y

黑色 純白色 紅色 綠色 象牙白 灰色 深灰色 橘黃色

Terminal

Q	S	S1	P	R	R1	G	PCB	PCC

()...Momentary

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

JS-606C-Q-B/B-6-□ JS-606B-R-B/B-1-□




N.W.:3.7g



N.W.:3.7g

W	Panel Thickness
19.2	0.75-1.25
19.4	1.25-2.0
19.8	2.0-3.0



JS-606A-G-B/B-3-□ JS-606I-Q-G/B-1-□



N.W.:3.2g



N.W.:3g

