




# Kodak Lithium Battery

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## KCRV3

Effective : January 2005

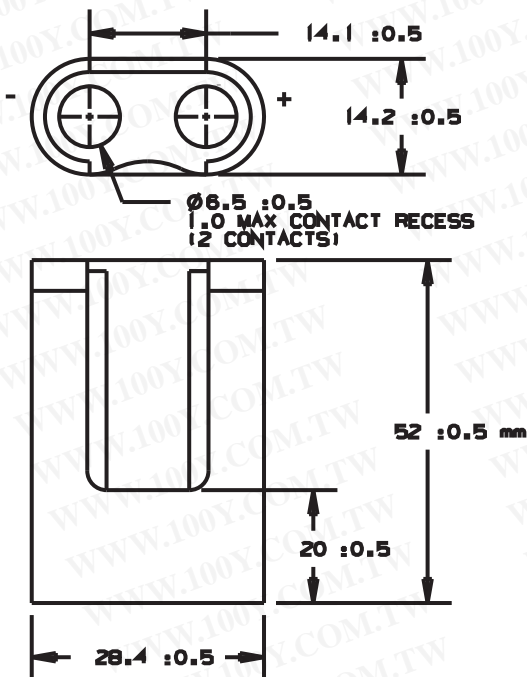


System:	Lithium/Manganese Dioxide, Li/MnO <sub>2</sub>	
Designation:	ANSI	IEC
Nominal Voltage:	3.0 Volts	
Capacity:	3200 mAh at 100 Ohms to 2.0 Volts	
Maximum Discharge:	1,500 mA Continuous, 3,500 mA Pulse	
Temperature Range:	-40°C to 65°C Operating -20°C to 45°C Storage	
Average Weight:	38 grams	
Volume:	21 cm <sup>3</sup>	
Terminals:	Flat recessed contacts	
Jacket:	Plastic housing/film label	
Lithium Content:	< .65 grams/cell < 1.3 grams/battery	

NOTE: 1) Recognized under the Component Program of Underwriters Laboratories, Inc.  
 2) This battery complies with ANSI C18, IEC 60086, & EEC directive 91/157 standards.


### Typical Pulse Characteristics KCRV3

ANSI PULSE TEST  
1.2 A PULSE 3 SEC ON/7 SEC OFF TO 1.30V

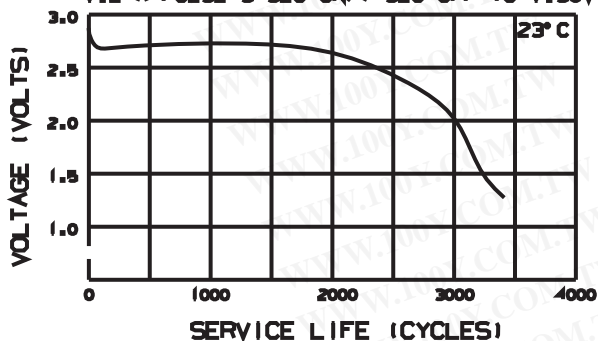


### Typical Pulse Characteristics KCRV3

ANSI PULSE TEST  
0.9 A PULSE 3 SEC ON/27 SEC OFF TO 1.55V

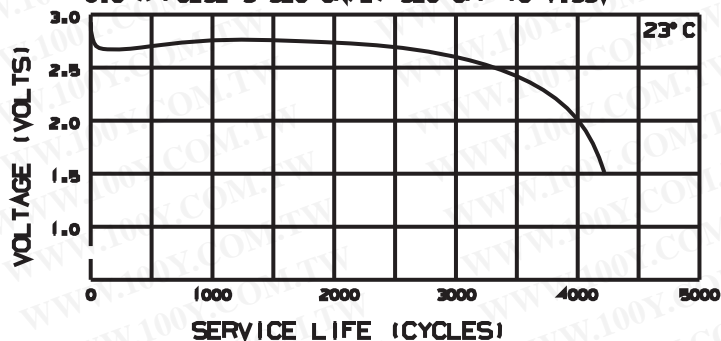


### Typical Discharge Characteristics KCRV3

CONTINUOUS DISCHARGE (LOAD 100 Ohms) AT 23°C

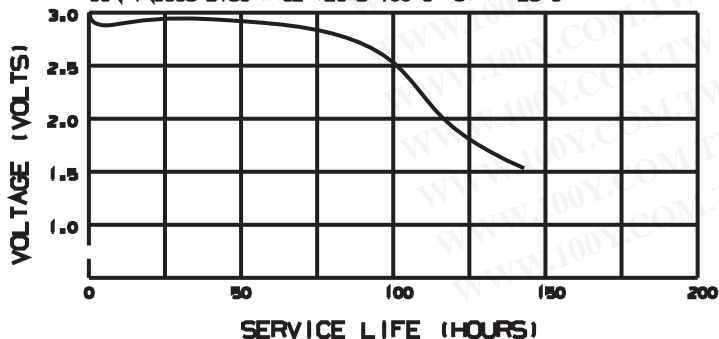

### Typical Discharge Characteristics KCRV3

CONTINUOUS DISCHARGE (LOAD 1000mA) AT 23°C

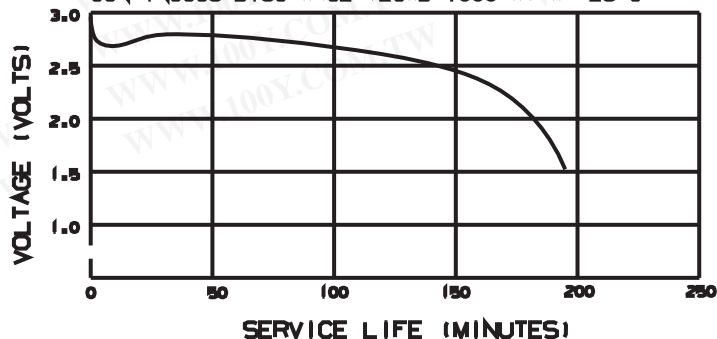

The curves and data in this publication represent product tested under the conditions specified. They do not represent standards or specifications which must be met by Eastman Kodak Company. The company reserves the right to change and improve product characteristics at any time.

For more information, contact  
 EASTMAN KODAK COMPANY  
 343 State Street  
 Rochester, New York 14650-0811  
 1-800-242-2424  
[www.kodak.com/go/batteries](http://www.kodak.com/go/batteries)