

LM119/LM219/LM319

High Speed Dual Comparator

General Description

The LM119 series are precision high speed dual comparators fabricated on a single monolithic chip. They are designed to operate over a wide range of supply voltages down to a single 5V logic supply and ground. Further, they have higher gain and lower input currents than devices like the LM710. The uncommitted collector of the output stage makes the LM119 compatible with RTL, DTL and TTL as well as capable of driving lamps and relays at currents up to 25 mA.

The LM319A offers improved precision over the standard LM319, with tighter tolerances on offset voltage, offset current, and voltage gain.

Although designed primarily for applications requiring operation from digital logic supplies, the LM119 series are fully specified for power supplies up to $\pm 15V$. It features faster response than the LM111 at the expense of higher power dis-

sipation. However, the high speed, wide operating voltage range and low package count make the LM119 much more versatile than older devices like the LM711.


The LM119 is specified from $-55^{\circ}C$ to $+125^{\circ}C$, the LM219 is specified from $-25^{\circ}C$ to $+85^{\circ}C$, and the LM319A and LM319 are specified from $0^{\circ}C$ to $+70^{\circ}C$.

Features

- Two independent comparators
- Operates from a single 5V supply
- Typically 80 ns response time at $\pm 15V$
- Minimum fan-out of 2 each side
- Maximum input current of 1 μA over temperature
- Inputs and outputs can be isolated from system ground
- High common mode slew rate

Connection Diagram

Dual-In-Line Package



Top View


Order Number LM119J, LM119J/883 (Note 1),
LM219J, LM319J, LM319AM,
LM319M, LM319AN or LM319N

See NS Package Number J14A, M14A or N14A

Note 1: Also available per SMD# 8601401 or JM38510/10306

Typical Applications (Note 2)


Relay Driver



DS005705-5

Note 2: Pin numbers are for metal can package.

Window Detector



DS005705-6

$$V_{OUT} = 5V \text{ for } V_{LT} \leq V_{IN} \leq V_{UT}$$

$$V_{OUT} = 0 \text{ for } V_{IN} \leq V_{LT} \text{ or } V_{IN} \geq V_{UT}$$

Absolute Maximum Ratings (Note 9)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Total Supply Voltage	36V
Output to Negative Supply Voltage	36V
Ground to Negative Supply Voltage	25V
Ground to Positive Supply Voltage	18V
Differential Input Voltage	$\pm 5V$
Input Voltage (Note 3)	$\pm 15V$
ESD rating (1.5 k Ω in series with 100 pF)	800V
Power Dissipation (Note 4)	500 mW
Output Short Circuit Duration	10 sec
Storage Temperature Range	-65°C to 150°C

Lead Temperature (Soldering, 10 sec.)	260°C
Soldering Information Dual-In-Line Package Soldering (10 seconds)	260°C
Small Outline Package Vapor Phase (60 seconds)	215°C
Infrared (15 seconds)	220°C
See AN-450 "Surface Mounting Methods and Their Effect on Product Reliability" for other methods of soldering surface mount devices.	

Operating Temperature Range

LM119	-55°C to 125°C
LM219	-25°C to 85°C

Electrical Characteristics (Note 5)

Parameter	Conditions	LM119/LM219			Units
		Min	Typ	Max	
Input Offset Voltage (Note 6)	$T_A = 25^\circ C, R_S \leq 5k$		0.7	4.0	mV
Input Offset Current (Note 6)	$T_A = 25^\circ C$		30	75	nA
Input Bias Current	$T_A = 25^\circ C$		150	500	nA
Voltage Gain	$T_A = 25^\circ C$ (Note 8)	10	40		V/mV
Response Time (Note 7)	$T_A = 25^\circ C, V_S = \pm 15V$		80		ns
Saturation Voltage	$V_{IN} \leq -5 \text{ mV}, I_{OUT} = 25 \text{ mA}$ $T_A = 25^\circ C$		0.75	1.5	V
Output Leakage Current	$V_{IN} \geq 5 \text{ mV}, V_{OUT} = 35V$ $T_A = 25^\circ C$		0.2	2	μA
Input Offset Voltage (Note 6)	$R_S \leq 5k$			7	mV
Input Offset Current (Note 6)				100	nA
Input Bias Current				1000	nA
Input Voltage Range	$V_S = \pm 15V$ $V^+ = 5V, V^- = 0$	-12 1	± 13	+12 3	V
Saturation Voltage	$V^+ \geq 4.5V, V^- = 0$ $V_{IN} \leq -6 \text{ mV}, I_{SINK} \leq 3.2 \text{ mA}$ $T_A \geq 0^\circ C$ $T_A \leq 0^\circ C$		0.23	0.4 0.6	V
Output Leakage Current	$V_{IN} \geq 5 \text{ mV}, V_{OUT} = 35V,$ $V^- = V_{GND} = 0V$		1	10	μA
Differential Input Voltage				± 5	V
Positive Supply Current	$T_A = 25^\circ C, V^+ = 5V, V^- = 0$		4.3		mA
Positive Supply Current	$T_A = 25^\circ C, V_S = \pm 15V$		8	11.5	mA
Negative Supply Current	$T_A = 25^\circ C, V_S = \pm 15V$		3	4.5	mA

Note 3: For supply voltages less than $\pm 15V$ the absolute maximum input voltage is equal to the supply voltage.

Note 4: The maximum junction temperature of the LM119 is $150^\circ C$, while that of the LM219 is $110^\circ C$. For operating at elevated temperatures, devices in the H10 package must be derated based on a thermal resistance of $160^\circ C/W$, junction to ambient, or $19^\circ C/W$, junction to case. The thermal resistance of the J14 and N14 packages is $100^\circ C/W$, junction to ambient.

Note 5: These specifications apply for $V_S = \pm 15V$, and the Ground pin at ground, and $-55^\circ C \leq T_A \leq +125^\circ C$, unless otherwise stated. With the LM219, however, all temperature specifications are limited to $-25^\circ C \leq T_A \leq +85^\circ C$. The offset voltage, offset current and bias current specifications apply for any supply voltage from a single 5V supply up to $\pm 15V$ supplies. Do not operate the device with more than 16V from ground to V_S .

Note 6: The offset voltages and offset currents given are the maximum values required to drive the output within a volt of either supply with a 1 mA load. Thus, these parameters define an error band and take into account the worst case effects of voltage gain and input impedance.

Note 7: The response time specified (see definitions) is for a 100 mV input step with 5 mV overdrive.

Note 8: Output is pulled up to 15V through a 1.4 k Ω resistor.

Note 9: Refer to RETS119X for LM119H/883 and LM119J/883 specifications.

勝特力材料 886-3-5753170

胜特力电子(上海) 86-21-54151736

胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

Absolute Maximum Ratings

LM319A/319 (Note 9)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

Total Supply Voltage	36V	Storage Temperature Range	-65°C to 150°C
Output to Negative Supply Voltage	36V	Lead Temperature (Soldering, 10 sec.)	260°C
Ground to Negative Supply Voltage	25V	Soldering Information	
Ground to Positive Supply Voltage	18V	Dual-In-Line Package	260°C
Differential Input Voltage	±5V	Soldering (10 sec.)	
Input Voltage (Note 10)	±15V	Small Outline Package	215°C
Power Dissipation (Note 11)	500 mW	Vapor Phase (60 sec.)	220°C
Output Short Circuit Duration	10 sec	Infrared (15 sec.)	
ESD rating (1.5 kΩ in series with 100 pF)	800V	See AN-450 "Surface Mounting Methods and Their Effect on Product Reliability" for other methods of soldering surface mount devices.	
		LM319A, LM319	0°C to 70°C

Electrical Characteristics (Note 12)

Parameter	Conditions	LM319A			LM319			Units
		Min	Typ	Max	Min	Typ	Max	
Input Offset Voltage (Note 13)	$T_A = 25^\circ\text{C}$, $R_S \leq 5\text{k}\Omega$		0.5	1.0		2.0	8.0	mV
Input Offset Current (Note 13)	$T_A = 25^\circ\text{C}$		20	40		80	200	nA
Input Bias Current	$T_A = 25^\circ\text{C}$		150	500		250	1000	nA
Voltage Gain	$T_A = 25^\circ\text{C}$ (Note 15)	20	40		8	40		V/mV
Response Time (Note 14)	$T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$		80			80		ns
Saturation Voltage	$V_{IN} \leq -10\text{ mV}$, $I_{OUT} = 25\text{ mA}$ $T_A = 25^\circ\text{C}$		0.75	1.5		0.75	1.5	V
Output Leakage Current	$V_{IN} \geq 10\text{ mV}$, $V_{OUT} = 35\text{V}$, $V^- = V^{\text{GND}} = 0\text{V}$, $T_A = 25^\circ\text{C}$		0.2	10		0.2	10	µA
Input Offset Voltage (Note 13)	$R_S \leq 5\text{k}\Omega$			10			10	mV
Input Offset Current (Note 13)				300			300	nA
Input Bias Current				1000			1200	nA
Input Voltage Range	$V_S = \pm 15\text{V}$ $V^+ = 5\text{V}$, $V^- = 0$	1	±13	3	1	±13	3	V
Saturation Voltage	$V^+ \geq 4.5\text{V}$, $V^- = 0$ $V_{IN} \leq -10\text{ mV}$, $I_{SINK} \leq 3.2\text{ mA}$		0.3	0.4		0.3	0.4	V
Differential Input Voltage				±5			±5	V
Positive Supply Current	$T_A = 25^\circ\text{C}$, $V^+ = 5\text{V}$, $V^- = 0$		4.3			4.3		mA
Positive Supply Current	$T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$		8	12.5		8	12.5	mA
Negative Supply Current	$T_A = 25^\circ\text{C}$, $V_S = \pm 15\text{V}$		3	5		3	5	mA

Note 10: For supply voltages less than ±15 the absolute maximum input voltage is equal to the supply voltage.

Note 11: The maximum junction temperature of the LM319A and LM319 is 85°C. For operating at elevated temperatures, devices in the H10 package must be derated based on a thermal resistance of 160°C/W, junction to ambient, or 19°C/W, junction to case. The thermal resistance of the N14 and J14 package is 100°C/W, junction to ambient. The thermal resistance of the M14 package is 115°C/W, junction to ambient.

Note 12: These specifications apply for $V_S = \pm 15\text{V}$, and $0^\circ\text{C} \leq T_A \leq 70^\circ\text{C}$, unless otherwise stated. The offset voltage, offset current and bias current specifications apply for any supply voltage from a single 5V supply up to ±15V supplies. Do not operate the device with more than 16V from ground to V_S .

Note 13: The offset voltages and offset currents given are the maximum values required to drive the output within a volt of either supply with a 1 mA load. Thus, these parameters define an error band and take into account the worst case effects of voltage gain and input impedance.


Note 14: The response time specified is for a 100 mV input step with 5 mV overdrive.

Note 15: Output is pulled up to 15V through a 1.4 kΩ resistor.

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw


Typical Performance Characteristics LM119A/LM119/LM219

Input Currents




DS005705-10

Common Mode Limits




DS005705-11

Transfer Function

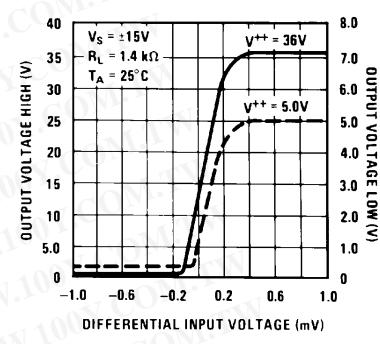


DS005705-12

Response Time for Various Input Overdrives

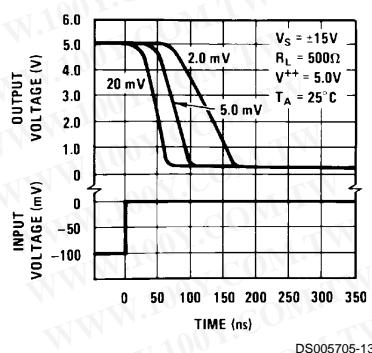


DS005705-13

Response Time for Various Input Overdrives

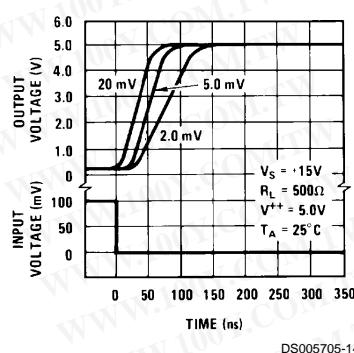


DS005705-14

Input Characteristics

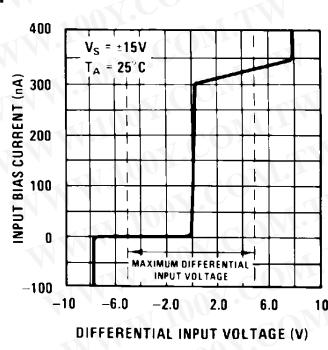


DS005705-15

Response Time for Various Input Overdrives

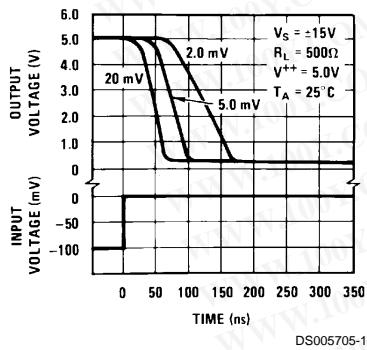


DS005705-16

Response Time for Various Input Overdrives

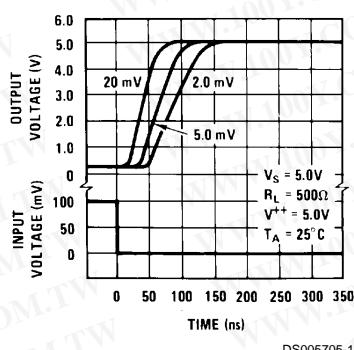

DS005705-17

Output Saturation Voltage

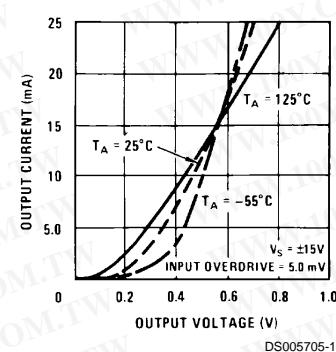


DS005705-18


勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Typical Performance Characteristics LM119A/LM119/LM219 (Continued)


Supply Current



Supply Current




Output Limiting Characteristics

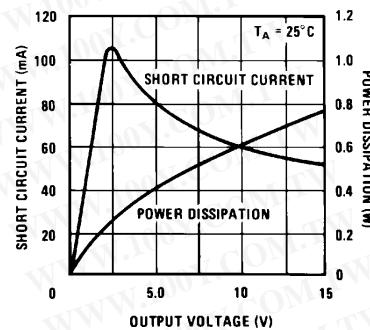


Typical Performance Characteristics LM319A, LM319


Input Currents

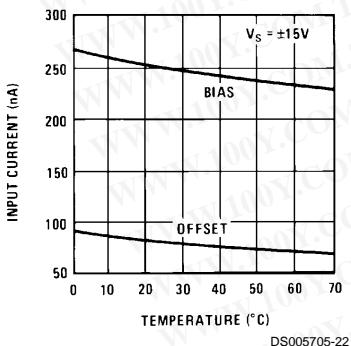


Supply Currents




Transfer Function

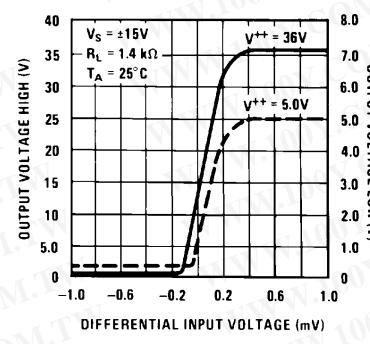


Response Time for Various Input Overdrives

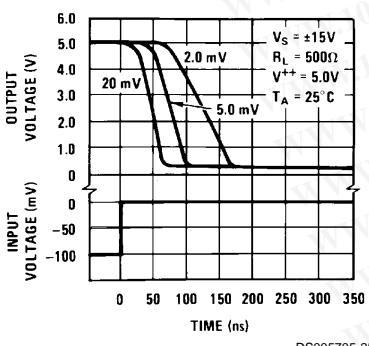

Response Time for Various Input Overdrives

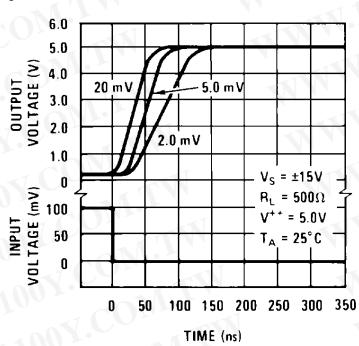

Input Characteristics

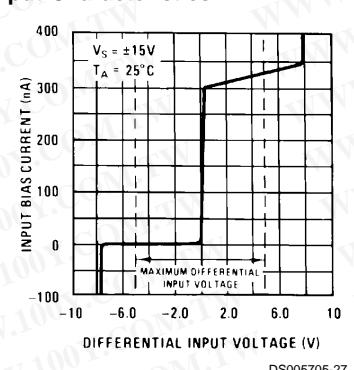


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)


Typical Performance Characteristics LM319A, LM319 (Continued)

Response Time for Various Input Overdrives

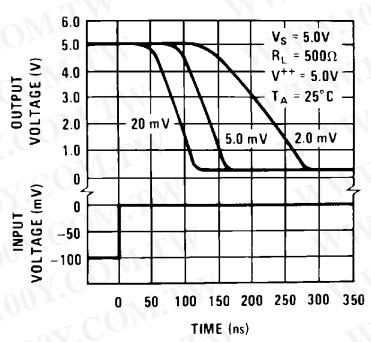


DS005705-28

Response Time for Various Input Overdrives

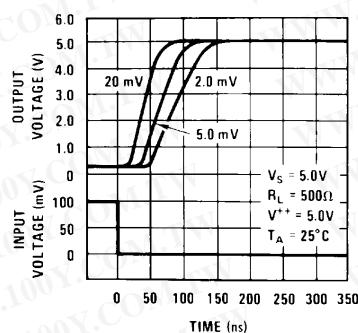


DS005705-29

Output Saturation Voltage




DS005705-30

Supply Current




DS005705-31

Common Mode Limits

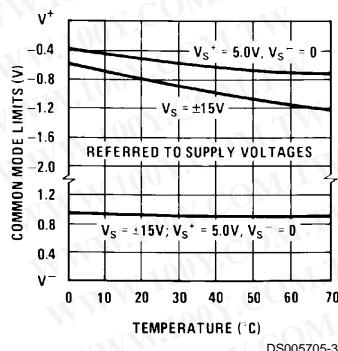

DS005705-32

Output Limiting Characteristics

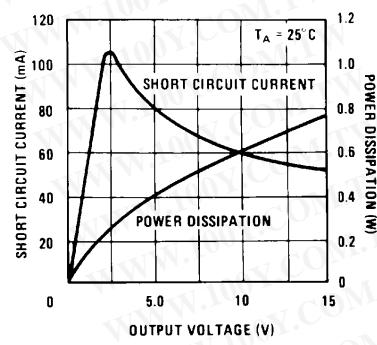


DS005705-33

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

Schematic Diagram

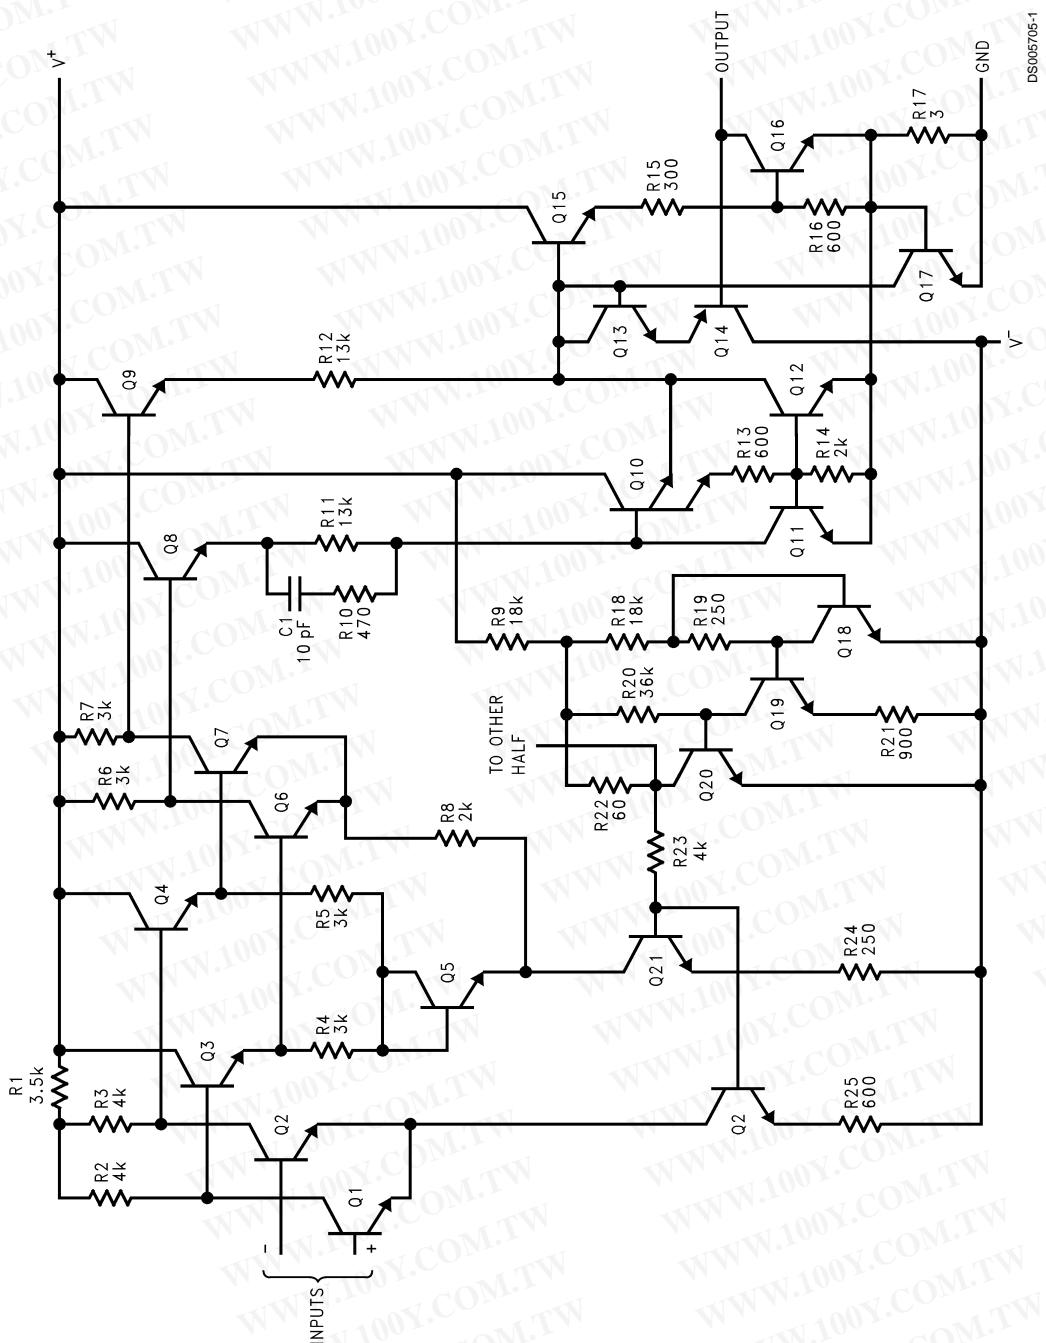


*Do not operate the LM119 with more than 16V between GND and V⁺

DS003705-1

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Connection Diagrams

Metal Can Package



Case is connected to pin 5 (V^-)

Top View
Order Number LM119H, LM119H/883 (Note 1),
or LM319H
See NS Package Number H10C

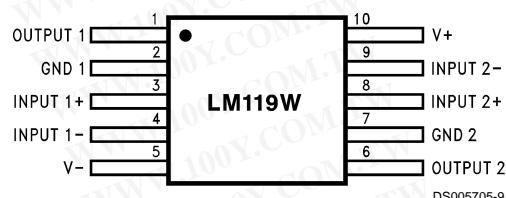


Order Number LM119W/883
See NS Package Number W10A

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)


Physical Dimensions

inches (millimeters) unless otherwise noted

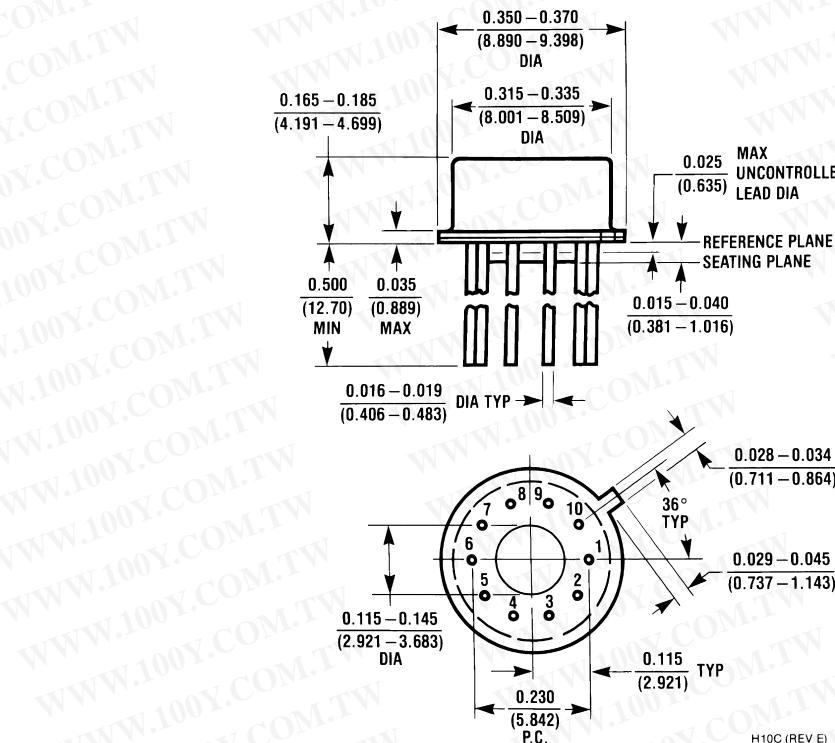

Metal Can Package (H)
Order Number LM119H, LM119H/883, LM319AH or LM319H
NS Package Number H10C




勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

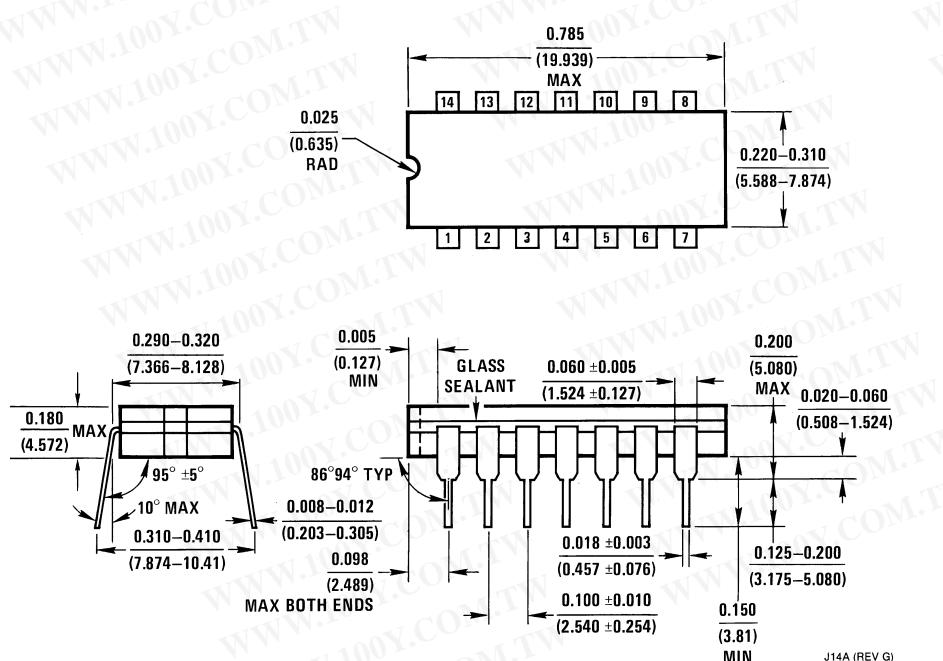

Cavity Dual-In-Line Package (J)
Order Number LM119J, LM119J/883, LM219J, LM319AJ or LM319J
NS Package Number J14A


Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

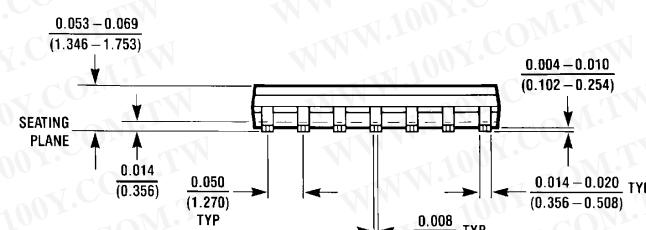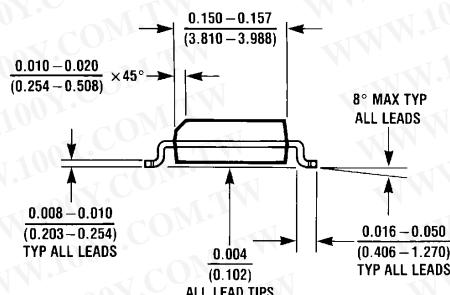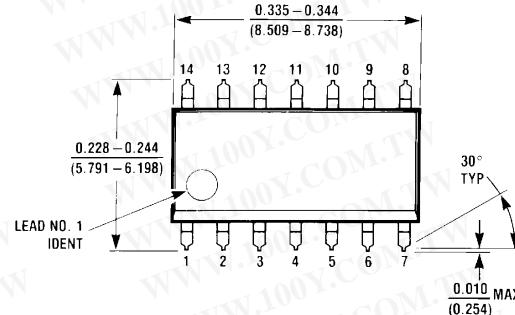


M14A (REV H)


Dual-In-Line Package (M)
 Order Number LM319AM or LM319M
 NS Package Number M14A

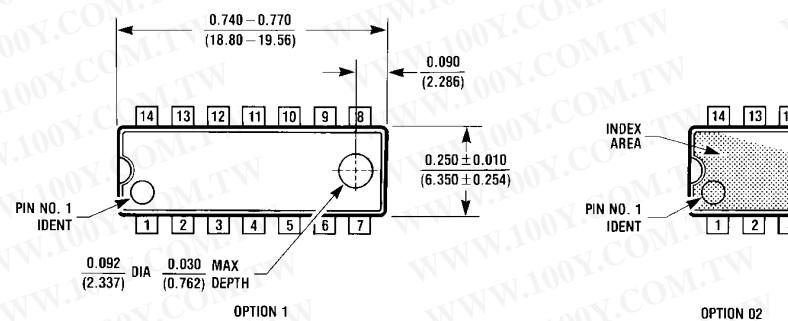

OPTION 1

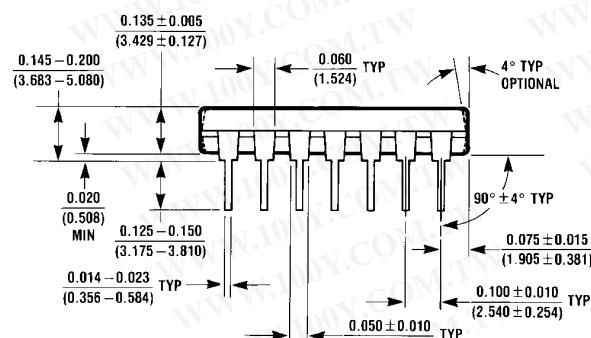

OPTION 02

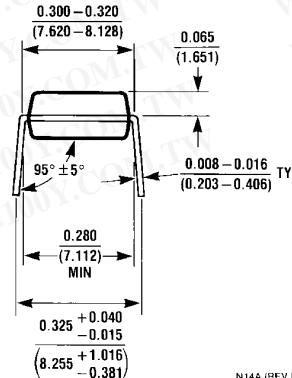


N14A (REV F)

Molded Dual-In-Line Package (N)
 Order Number LM319AN or LM319N
 NS Package Number N14A

LM119/LM219/LM319 High Speed Dual Comparator

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

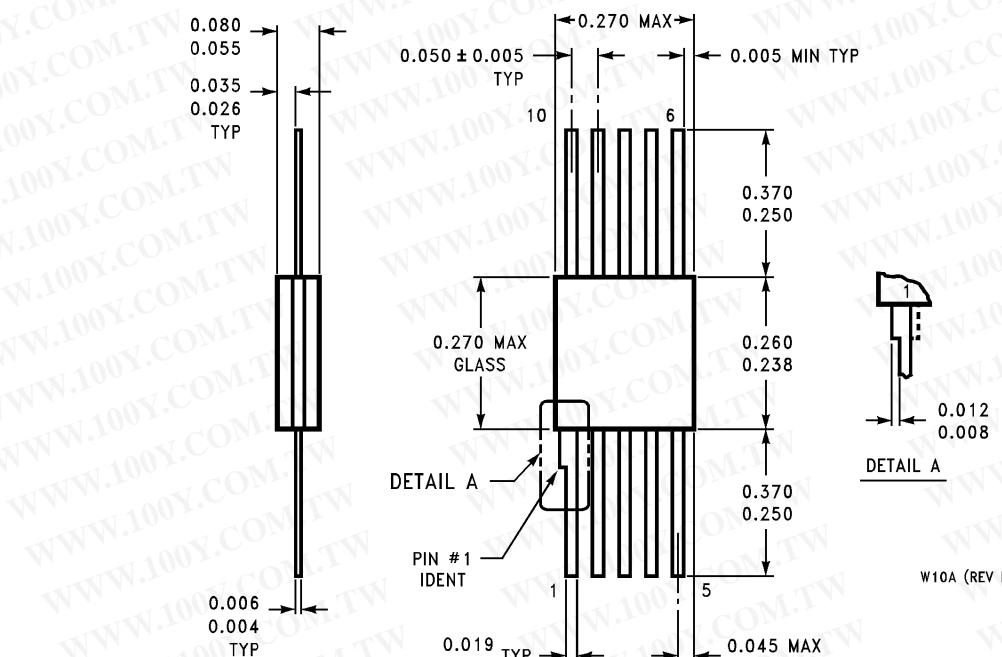

Order Number LM119W/883, LM119WG/883
NS Package Number W10A, WG10A

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

LIFE SUPPORT POLICY

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT AND GENERAL COUNSEL OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

 National Semiconductor
Corporation
Americas
Tel: 1-800-272-9959
Fax: 1-800-737-7018
Email: support@nsc.com
www.national.com

National Semiconductor
Europe
Fax: +49 (0) 180-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 69 9508 6208
English Tel: +44 (0) 870 24 0 2171
Français Tel: +33 (0) 1 41 91 8790

National Semiconductor
Asia Pacific Customer
Response Group
Tel: 65-2544466
Fax: 65-2504466
Email: ap.support@nsc.com

National Semiconductor
Japan Ltd.
Tel: 81-3-5639-7560
Fax: 81-3-5639-7507