



MBRB2035CT THRU MBRB2060CT

SCHOTTKY RECTIFIER

Reverse Voltage - 35 to 60 Volts Forward Current - 20.0 Amperes

TO-263AB

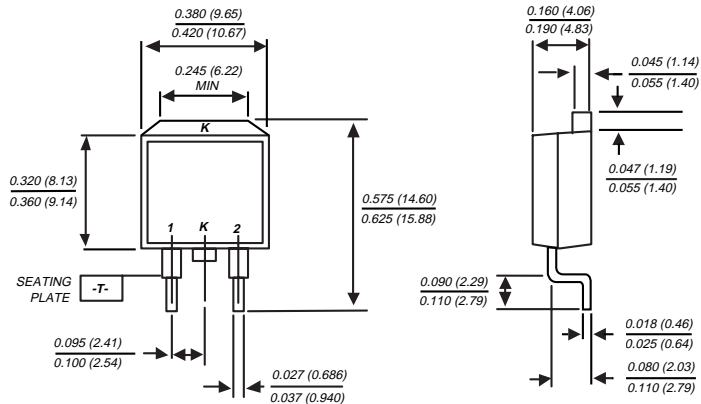

Dimensions in inches and (millimeters)

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Dual rectifier construction, positive center tap
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High current capability, low forward voltage drop
- ◆ High surge capability
- ◆ Guardring for overvoltage protection
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◆ High temperature soldering in accordance with CECC 802 / Reflow guaranteed



MECHANICAL DATA

Case: JEDEC TO-263AB molded plastic
Terminals: Leads solderable per MIL-STD-750, Method 2026
Polarity: As marked
Mounting Position: Any
Weight: 0.08 ounce, 2.24 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	MBRB2035CT	MBRB2045CT	MBRB2050CT	MBRB2060CT	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	35	45	50	60	Volts
Maximum working peak reverse voltage	V_{RWM}	35	45	50	60	Volts
Maximum DC blocking voltage	V_{DC}	35	45	50	60	Volts
Maximum average forward rectified current at $T_C=135^\circ\text{C}$	$I_{(AV)}$	20.0				Amps
Peak repetitive forward current per leg at $T_C=135^\circ\text{C}$ (rated V_R , sq. wave 2.0 KHz)	I_{FRM}	20.0				Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	150.0				Amps
Peak repetitive reverse surge current (NOTE 1)	I_{RRM}	1.0		0.5		Amps
Maximum instantaneous forward voltage per leg at $I_F=10\text{A}$, $T_C=25^\circ\text{C}$ (NOTE 2) $I_F=10\text{A}$, $T_C=125^\circ\text{C}$ $I_F=20\text{A}$, $T_C=25^\circ\text{C}$ $I_F=20\text{A}$, $T_C=125^\circ\text{C}$	V_F	— 0.57 0.84 0.72		0.80 0.70 0.95 0.85		Volts
Maximum instantaneous reverse current at rated DC blocking voltage per leg $T_C=25^\circ\text{C}$ $T_C=125^\circ\text{C}$	I_R	0.1 15.0		0.15 150.0		mA
Voltage rate of change, (rated V_R)	dv/dt	10,000				V/ μs
Typical thermal resistance per leg (NOTE 3)	$R_{\theta JC}$	2.0				$^\circ\text{C}/\text{W}$
Operating junction temperature range	T_J	-65 to +150				$^\circ\text{C}$
Storage temperature range	T_{STG}	-65 to +175				$^\circ\text{C}$

NOTES: (1) 2.0 μs pulse width, $f=1.0\text{KHz}$
(2) Pulse test: 300 μs pulse width, 1% duty cycle
(3) Thermal resistance from junction to case per leg

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

RATINGS AND CHARACTERISTIC CURVES MBRB2035CT THRU MBRB2060CT

