

MC34063A/MC33063A

SMPS Controller

Features


- Operation from 3.0 to 40V input
- Short circuit current limiting
- Low standby current
- Output switch current of 1.5A without external transistors
- Output voltage adjustable
- Frequency of operation from 100Hz to 100KHz
- Step up, Step down or inverting switching regulators

Description

The MC34063A/MC33063A is a monolithic regulator subsystem intended for use as DC to DC converter. This device contains a temperature compensated bandgap reference, a duty cycle control oscillator, driver and high current output switch. It can be used for step down, step up or inverting switching regulators as well as for series pass regulators.



Internal Block Diagram

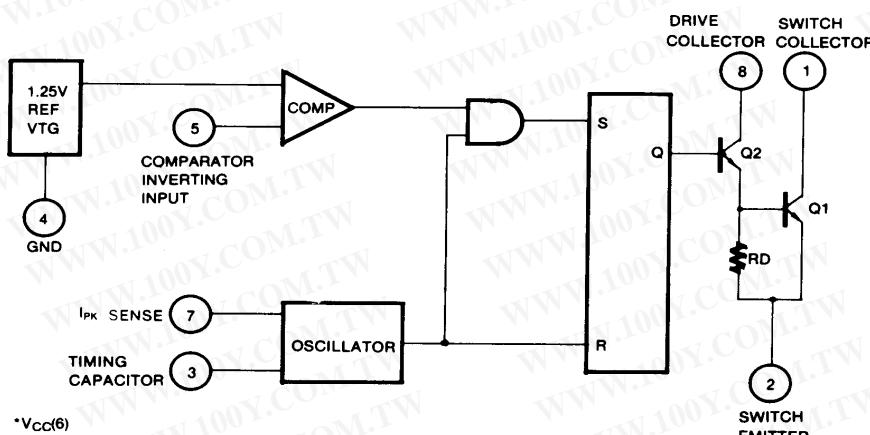

Absolute Maximum Ratings

Parameter	Symbol	Value	Unit
Supply Voltage	V _{CC}	40	V
Comparator Input Voltage Range	V _{I(COMP)}	- 0.3 ~ + 40	V
Switch Collector Voltage	V _{C(SW)}	40	V
Switch Emitter Voltage	V _{E(SW)}	40	V
Switch Collector To Emitter Voltage	V _{C(E)}	40	V
Driver Collector Voltage	V _{C(DR)}	40	V
Switch Current	I _{SW}	1.5	A
Storage Temperature Range	T _{STG}	- 65 ~ + 150	°C

Electrical Characteristics

(V_{CC} = 5.0V, T_A = 0°C to +70°C for the MC34063, T_A = -40°C to the +85°C for the MC33063, unless otherwise specified)

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
OSCILLATOR						
Charging Current	I _{CHG}	V _{CC} = 5 to 40V T _A = 25°C	22	31	42	μA
Discharging Current	I _{DISCHG}	V _{CC} = 5 to 40V T _A = 25°C	140	190	260	μA
Oscillator Amplitude	V _(OSC)	T _A = 25°C	-	0.5	-	V
Discharge To Charge Current Ratio	K	V ₇ = V _{CC} , T _A = 25°C	5.2	6.1	7.5	-
Current Limit Sense Voltage	V _{SENSE(C.L.)}	I _{CHG} = I _{DISCHG} T _A = 25°C	250	300	350	mV
OUTPUT SWITCH						
Saturation Voltage 1 (Note)	V _{CE(SAT)1}	I _{SW} = 1.0A V _{C(driver)} = V _{C(SW)}	-	0.95	1.3	V
Saturation Voltage 2 (Note)	V _{CE(SAT)2}	I _{SW} = 1.0A, V _{C(driver)} = 50mA	-	0.45	0.7	V
DC Current Gain (Note)	G _{I(DC)}	I _{SW} = 1.0A, V _{CE} = 5.0V, T _A = 25°C	50	180	-	-
Collector off State Current (Note)	I _{C(OFF)}	V _{CE} = 40V, T _A = 25°C	-	0.01	100	μA
COMPARATOR						
Threshold Voltage	V _{TH}	-	1.21	1.24	1.29	V
Threshold Voltage Line Regulation	ΔV _{TH}	V _{CC} = 3 to 40V	-	2.0	5.0	mV
Input Bias Current	I _{BIAS}	V _I = 0V	-	50	400	nA
TOTAL DEVICE						
Supply Current MC34063	I _{CC}	V _{CC} = 5 to 40V C _T = 0.001μF V ₇ = V _{CC} , V ₅ >V _{TH} pin2 = GND	-	-	4.0	mA
MC33063			-	-	5.0	

Note :

Output switch tests are performed under pulsed conditions to minimize power dissipation

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Typical Performance Characteristics

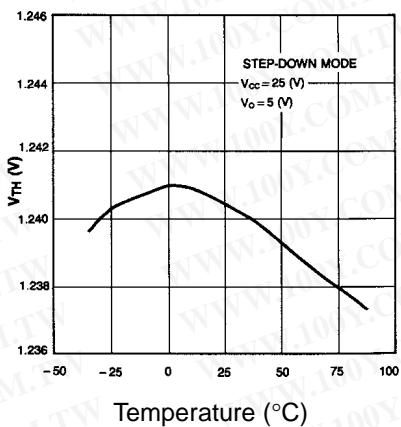


Figure 1. Temperature Drift (V_{TH})

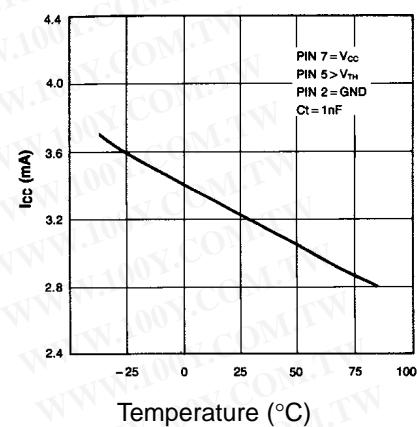


Figure 2. Temperature Drift (I_{CC})


勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

Mechanical Dimensions

Package

8-DIP

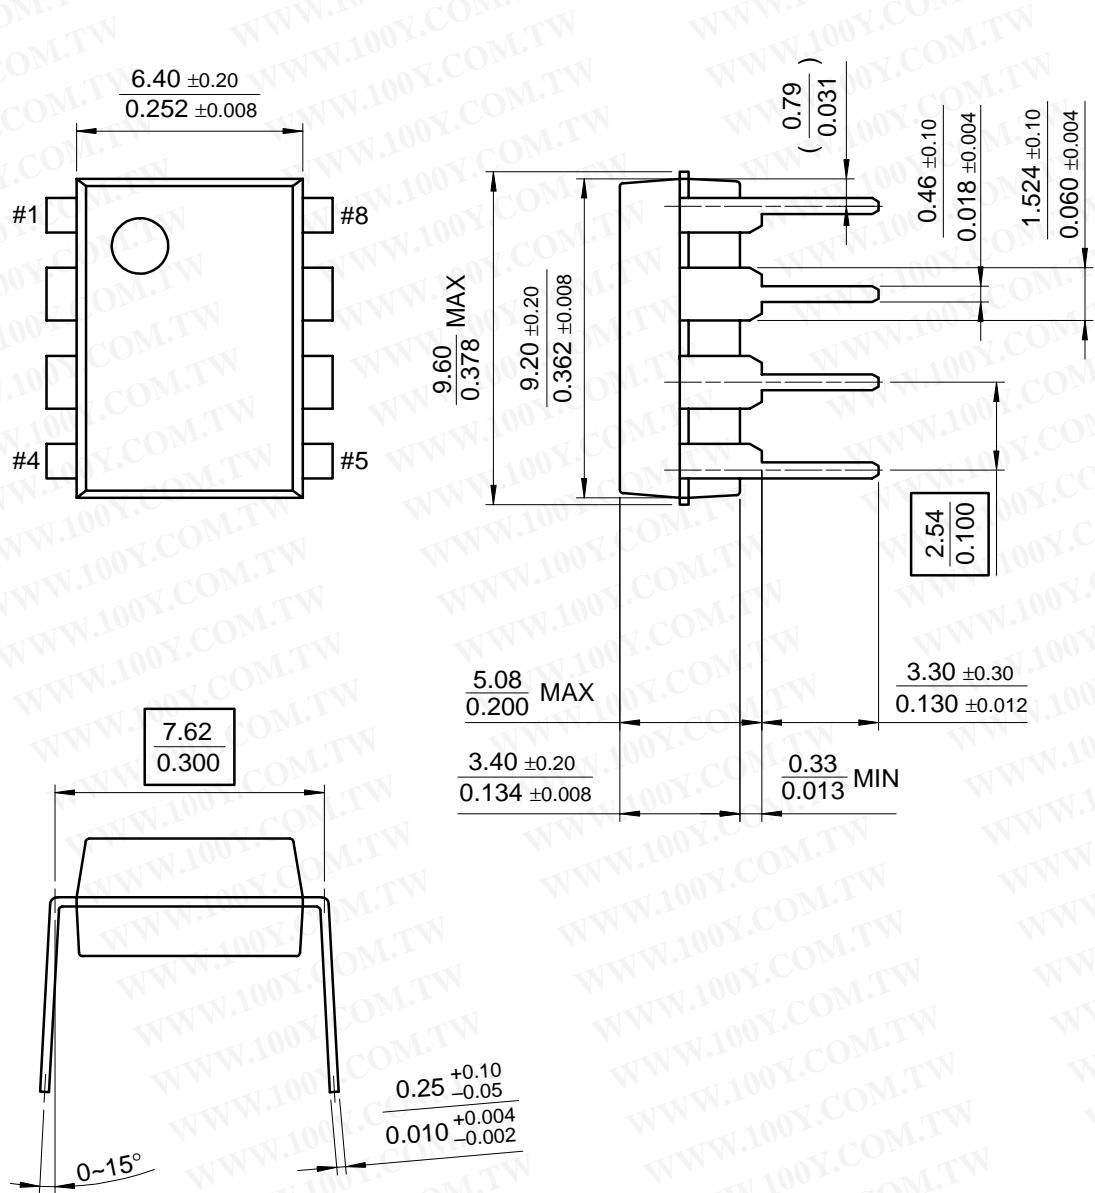


勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Mechanical Dimensions (Continued)

Package

8-SOP

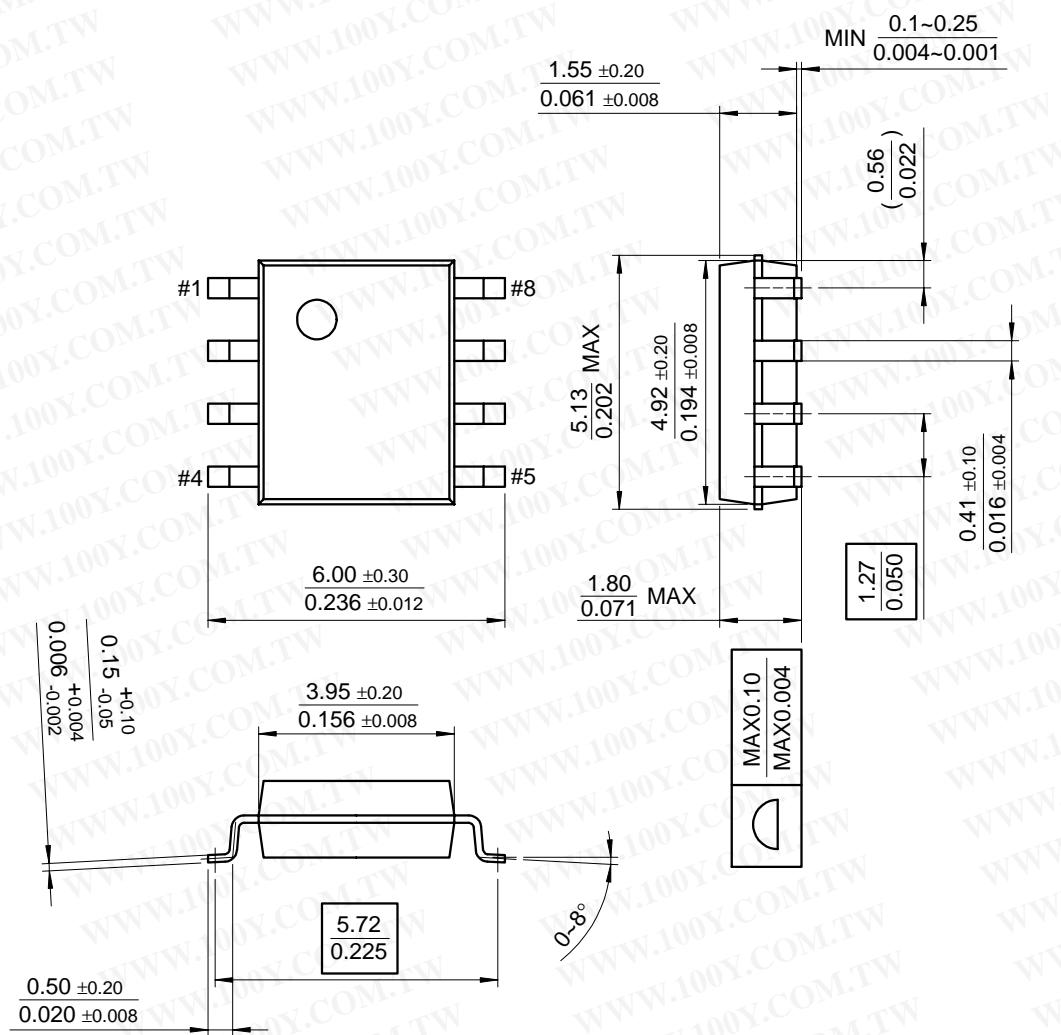

勝特力材料 886-3-5753170
 勝特力電子(上海) 86-21-54151736
 勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Ordering Information

Product Number	Package	Operating Temperature
MC34063AP	8-DIP	0 ~ + 70°C
MC34063AD	8-SOP	
MC33063AP	8-DIP	-40 ~ + 85°C
MC33063AD	8-SOP	

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)