


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

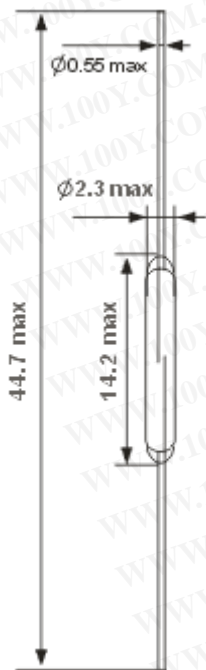

Part No.	型号	MKA-14103
Total Length	总长度	44.7 mm
Glass Length	玻璃长度	14.2 mm
Glass Diameter	直径	2.3 mm
Contact Form	触点形式	1A (SPST-NO)
Contact Position	触点位置	SYM
Contact Material	触点材质	Ru
Contact Rating	触点负载	10W
Max. Switching Voltage	最大开关电压	100 VDC / VAC
Max. Switching Current	最大开关电流	0.5A
Contact Resistance (at initial value)	接触电阻 (初始值)	100 mOhms
Pull In Value (AT)	启动值	10-35
Drop Out Value (AT)	释放值	5
Operation Time	动作时间	1.0 mSec.(Max.)
Release Time	释放时间	0.4 mSec.(Max.)
Breakdown Voltage	耐高压	220VDC(AT<25)/ 250VDC(AT>25)
Contact Capacitance	触点电容	0.7 pF
Insulation Resistance	绝缘电阻	10 ¹⁰ Ohms
Resonant Frequency	谐振频率	4 kHz
Operation Temperature	工作温度范围	-60 °C ~+155 °C
High Humidity	最高湿度	98% (Max.)
Operation Frequency	最高工作频率	100 Hz
Electrical Life	电气寿命	10 ⁸ (5V ,10mA) 10 ⁵ (24V, 400mA)
Test Coil	测试线圈	5000 870 Ohm
Leads	引线脚	Gold-Plated 镀金
Safety	安全认证	UL