


# K-Light

# MR - 16

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

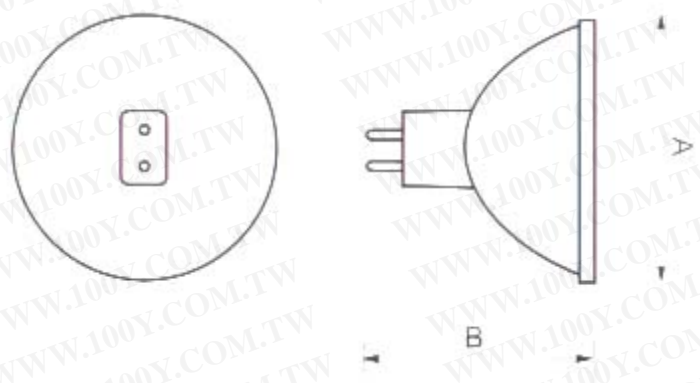

Item	Volts (V)	Watts (w)	Axis cd (cd)	Beam Angle	Color Temperature (k)	Life Hours
<b>MR-16/BASE:GX5.3</b>						
ESX	12	20	3350	12°	2925	
BBF	12	20	1000	24°	2925	
BAB	12	20	460	36°	2925	
FMT	12	35	6300	12°	2925	
FMV	12	35	2200	22°	2925	
FMW	12	35	730	36°	2925	
EXT	12	50	9150	13°	3050	2000
EXZ	12	50	3000	24°	3050	
EXN	12	50	1500	38°	3050	
FNV	12	50	1000	60°	3050	
EYF	12	75	11500	13°	3050	
EYJ	12	75	4200	24°	3050	
EYC	12	75	2200	38°	3050	
<b>MR-16/ ALUMINUM COATED TYPE</b>						
BAB	12	20	800	36°	3000	3000
FMW	12	35	1700	36°	3000	

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

EXN	12	50	2100	36°	3000
<b>MR-16/ CLASS TYPE (HARD COATING)</b>					
ESX	12	20	4000	10°	2950
BAB	12	20	700	38°	2950
	12	20	450	60°	2950
FRB	12	20	8000	10°	3000
EMW	12	35	1500	38°	3000
EXT	12	35	800	60°	3000
EXZ	12	35	10000	10°	3050
ENL	12	50	2800	30°	3050
EXN	12	50	2000	38°	3050
FNV	12	50	1050	60°	3000
EYF	12	75	13000	10°	3100
EYC	12	75	2750	38°	3100

3000