



1W DC-DC Unregulated Dual Output Converter

DET01 series



- Features :
 - 3000VDC I/O isolation
 - Internal SMD technology
 - Protection: Short circuit
 - Non-conductive plastic case
 - SMD package styles
 - 100% full load burn-in test
 - Low cost / High reliability
 - Approved: UL / CUL
 - 1 year warranty

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


SPECIFICATION



ORDER NO.	DET01L-05	DET01M-05	DET01L-09	DET01M-09	DET01L-12	DET01M-12	DET01L-15	DET01M-15	
OUTPUT	DC OUTPUT VOLTAGE	±5V		±9V		±12V		±15V	
	OUTPUT CURRENT RANGE	±100mA		±56mA		±42mA		±33mA	
	EFFICIENCY	72%	72%	75%	76%	78%	78%	79%	
	RATED POWER	1W							
	RIPPLE & NOISE (max.) Note.2	100mVp-p							
	LINE REGULATION Note.3	±1.2% for 1% input variation							
	LOAD REGULATION Note.4	±8.0%							
	VOLTAGE ACCURACY	±2.0%							
SWITCHING FREQUENCY(Typ.)	100KHz								
INPUT	VOLTAGE RANGE	4.5 ~ 5.5V	10.8 ~ 13.2V	4.5 ~ 5.5V	10.8 ~ 13.2V	4.5 ~ 5.5V	10.8 ~ 13.2V	4.5 ~ 5.5V	10.8 ~ 13.2V
	NORMAL VOLTAGE	5V	12V	5V	12V	5V	12V	5V	12V
	INPUT CURRENT	Full load	280mA	122mA	280mA	122mA	280mA	122mA	280mA
No load		29mA	18mA	29mA	18mA	29mA	18mA	29mA	29mA
PROTECTION	OVER LOAD	Momentary Protection type : Broken							
	SHORT CIRCUIT	Momentary Protection type : Broken							
ENVIRONMENT	WORKING TEMP.	-40 ~ +85°C (Refer to output load derating curve)							
	WORKING HUMIDITY	20% ~ 90% RH non-condensing							
	STORAGE TEMP., HUMIDITY	-40 ~ +105°C, 10 ~ 95% RH							
	TEMP. COEFFICIENT	±0.03% / °C (0 ~ 50°C)							
SAFETY & EMC	SAFETY STANDARDS	UL60950-1, CSA C22.2							
WITHSTAND VOLTAGE	I/P-O/P:3KVDC								
ISOLATION RESISTANCE	I/P-O/P: 100M Ohms / 500VDC / 25°C / 70% RH								
OTHERS	MTBF	500khrs min. MIL-HDBK-217F(25°C)							
	DIMENSION	15.24*7.5*6.0mm or 0.60**0.30**0.24" inch (L*W*H)							
	WEIGHT	1.7g							

Mechanical Specification


Unit: mm (inch)

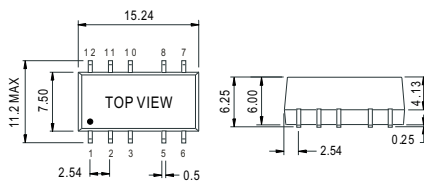

Pin Configuration

Pin No.	Output
1	-Vin
2	+Vin
3	NC
5	COM
6	-Vout
7	NC
8	+Vout
10	NC
11	NC
12	NC

Derating Curve

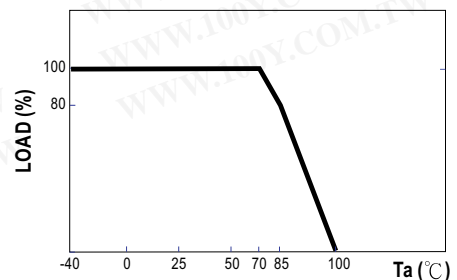

NOTE

- 1.All parameters are specified at normal input, rated load, 25°C 70% RH. Ambient.
- 2.Ripple & noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1uf & 47uf capacitor.
- 3.Line regulation is measured from low line to high line at rated load.
- 4.Load regulation is measured from 20% to 100% rated load.