









Backs

for Digimatic and Dial Indicators

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SPECIFICATIONS


Description	Order No.	Series 1 (ø41mm)		
		Series 2 (ø55.6mm)		
Series 3, 4 (ø77, 91mm)	Unit: mm	101211 (a=2.2)		
		101039 (a=2.5) 21AZB231 (for water-proof & type)		
Flat Back				
Lug-on-Center Back				
Magnetic Back				
Back with Offset Lug				
Back with Post				
Back with Screw Mount				
Adjustable Back				
Back with Dovetail				
Back with Adjustable Bracket				

There are two ways to support Digimatic and dial indicators; by either holding the stem or the lug on the back of the indicator. The back of the indicator may need to be replaced for special applications. A wide variety of backs are available for Mitutoyo Digimatic and dial indicators.

FEATURES

- The lug can be orientated in 90° increments.

Application

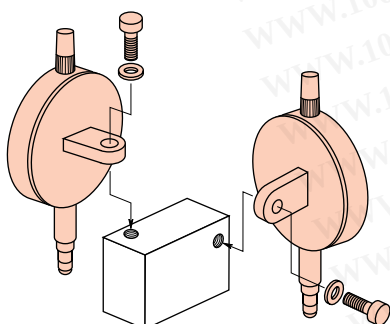

Accessories

for Digimatic and Dial Indicators

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Spindle Lifting Levers




FEATURES

- The Spindle Lifting Lever is attached to the top end of the spindle for improved inspection efficiency when using a dial indicator mounted on a stand.

SPECIFICATIONS

Order No.	Applicable dial indicators
21BZA205 (Lifting range: Up to 5mm)	Series 1: 1040F, 1041F, 1044F, 1044F-10, 1045F, 1124F, 1013F, 1109F, 1900F, 1929F
902011 (Lifting range: Up to 10mm) 902100 (Lifting range: Up to 10mm)	Series 2: 2929F, 2959F, 2044FE, 2044FE-09, 2045FE, 2046FE, 2046FH, 2046FLB, 2046FE-09, 2046FE-10, 2310FE, 2902FE, 2047FE, 2124F, 2125F, 2900F, 2901F, 2110F, 2109F, 2109FH, 2109FLB, 2113F, 2118F, 2119F, 2928F
903424 (Lifting range: Up to 25mm)	Series 2: 2048FE-10, 2050FE, 2050FE-10, 2320FE Series 3: 3046F, 3047F, 3109F Series 4: 4046
21AZB149 (Lifting range: Up to 10mm)	Series 2: 2929S, 2959S, 2044S, 2044S-09, 2045S, 2046S, 2046SH, 2046SLB, 2046S-09, 2046S-15, 2310S-10, 2902S, 2047S, 2124S-10, 2900S-10, 2901S-10, 2110S-10, 2109S-10, 2109SLB-10, 2113S-10, 2118S-10, 2119S-10, 2928S
21AZB150 (Lifting range: From 10mm up to 20mm)	Series 2: 2050S, 2050S-19, 2320S-10, 2048S-10

Application

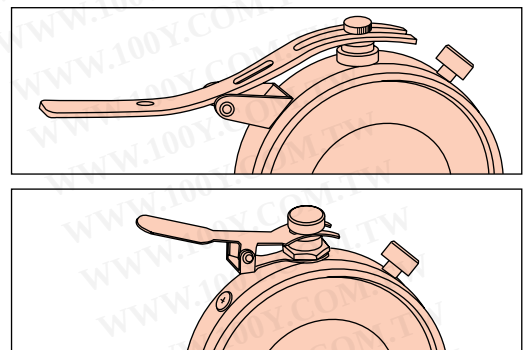

DIAL INDICATORS


Spindle Lifting Cable



SPECIFICATIONS

Order No.	Lifting range	Remarks
901975	Up to 10mm	Cable length: 300mm

Application

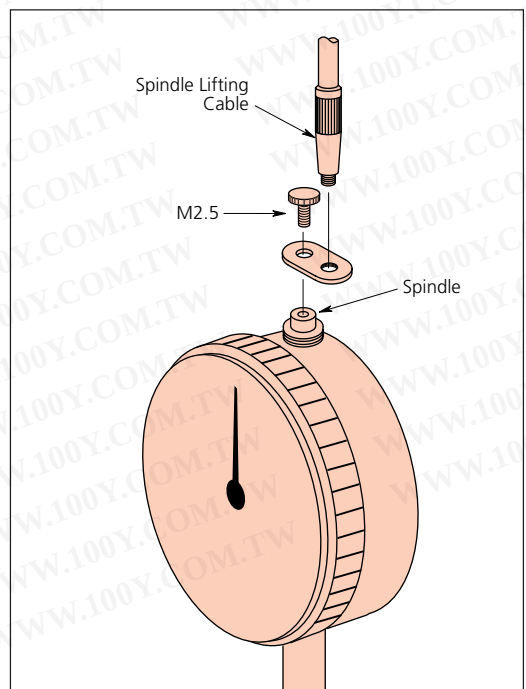

Accessories

for Digimatic and Dial Indicators

勝 特 力 材 料 886-3-5753170
 胜特力电子(上海) 86-21-34970699
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Colored Caps



8 colors of spindle caps are available for dial indicators with a range of 10mm or less.

SPECIFICATIONS

Color	Order No. Standard	Order No. Water-resistant
Black	193051	193595
White	193051W	193595W
Red	193051R	193595R
Green	193051G	193595G
Blue	193051B	193595B
Yellow	193051Y	193595Y
Orange	193051D	193595D
Pink	193051P	193595P

DIAL INDICATORS

Limit Stickers



FEATURES

- Stuck on the dial face or crystal of a dial indicator to indicate tolerance limits.

SPECIFICATIONS

Color	Order No.	Remarks
Red	136420	10 stickers per set
Green	136421	10 stickers per set
Yellow	136422	10 stickers per set