


**Panasonic**  
ideas for life

**250 mW  
SLIM POWER RELAY**

**LK-S RELAYS**



mm inch

**RoHS Directive compatibility information**  
<http://www.nais-e.com/>

## FEATURES

### 1. High sensitivity: 250mW

The power-saving relay is highly sensitive at the nominal operating power of 250 mW (530 mW power consumption on LK relays).

### 2. High insulation resistance between contact and coil

- 1) Creepage distance and clearances between contact and coil: Min. 6 mm .236 inch (In compliance with IEC65)
- 2) Surge withstand voltage between contact and coil: 10,000 V or more

### 3. High noise immunity realized by the card separation structure between contact and coil

### 4. Popular terminal pitch in AV equipment field

### 5. Space-saving slim type

Base area: Width 11 × Length 24 mm  
Width .433 × Length .945 inch

### 6. Conforms to the various safety standards

UL/CSA, VDE, TÜV and SEMKO SEV approved

## SPECIFICATIONS

### Contact

Arrangement		1 Form A
Initial contact resistance, max. (By voltage drop 6 V DC 1 A)		Max. 100 mΩ
Contact material		AgSnO <sub>2</sub> type
Rating (resistive load)	Nominal switching capacity	5 A 277 V AC
	Max. switching power	1,385 V A
	Max. switching voltage	277 V AC
	Max. switching current	5 A (AC)
	Min. switching capacity#1	100 mA, 5 V DC
Expected life (min. operations)	Mechanical (at 180 cpm)	10 <sup>6</sup>
	Electrical (at 20 cpm) (at rated load)	10 <sup>5</sup>

### Coil

Nominal operating power	250 mW
-------------------------	--------

<sup>#1</sup> This value can change due to the switching frequency, environmental conditions, and desired reliability level, therefore it is recommended to check this with the actual load.

### Remarks

- \* Specifications will vary with foreign standards certification ratings.
- \*<sup>1</sup> Measurement at same location as "Initial breakdown voltage" section.
- \*<sup>2</sup> Detection current: 10mA
- \*<sup>3</sup> Wave is standard shock voltage of  $\pm 1.2 \times 50\mu s$  according to JEC-212-1981
- \*<sup>4</sup> Excluding contact bounce time.
- \*<sup>5</sup> Half-wave pulse of sine wave: 11 ms; detection time: 10  $\mu s$
- \*<sup>6</sup> Half-wave pulse of sine wave: 6 ms
- \*<sup>7</sup> Detection time: 10  $\mu s$
- \*<sup>8</sup> Refer to 6. Conditions for operation, transport and storage mentioned in AMBIENT ENVIRONMENT

### Characteristics

Max. operating speed		20 cpm (at rated load)
Initial insulation resistance* <sup>1</sup>		Min. 1,000 MΩ (at 500 V DC)
Initial * <sup>2</sup> breakdown voltage	Between open contacts	1,000 Vrms for 1 min.
	Between contact and coil	4,000 Vrms for 1 min.
Initial surge voltage between contact and coil* <sup>3</sup>		Min. 10,000 V
Operate time* <sup>4</sup> (at nominal voltage)		Max. 15 ms (at 20°C 68°F)
Release time (without diode)* <sup>4</sup> (at nominal voltage)		Max. 5 ms (at 20°C 68°F)
Temperature rise (at 70°C)		Max. 35°C with nominal coil voltage and at 5 A contact carrying current (resistance method)
Shock resistance	Functional* <sup>5</sup>	Min. 200 m/s <sup>2</sup> {approx. 20 G}
	Destructive* <sup>6</sup>	Min. 1,000 m/s <sup>2</sup> {approx. 100 G}
Vibration resistance	Functional* <sup>7</sup>	10 to 55Hz at double amplitude of 1.5mm
	Destructive	10 to 55Hz at double amplitude of 1.5mm
Conditions for operation, transport and storage* <sup>8</sup> (Not freezing and condensing at low temperature)	Ambient temp.	−40°C to +70°C −40°F to +158°F
	Humidity	5 to 85% R.H.
	Air pressure	86 to 106 kPa
Unit weight		Approx. 12 g .42 oz

## TYPICAL APPLICATIONS

- Audio visual equipment
- Office equipment
- Home appliances

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-54151736**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## ORDERING INFORMATION

Ex. LKS 1a F - 12V

Contact arrangement	Protective construction	Coil voltage(DC)
1a: 1 Form A	F: Flux-resistant type	5, 6, 9, 12, 18, 24V

UL/CSA, TÜV, SEMKO, TV-5 approved type is standard.


- Notes
1. Standard packing Carton: 100 pcs. Case: 500 pcs.
  2. 6 V, 18 V DC types are also available. Please consult us for details.

TYPES AND COIL DATA (at 20°C 68°F)

Part No.	Nominal voltage, V DC	Pick-up voltage, V DC (max.) (Initial)	Drop-out voltage, V DC (min.) (Initial)	Coil resistance, Ω (±10%)	Nominal operating current, mA (±10%)	Nominal operating power, mW	Maximum allowable voltage, V DC (at 20°C 68°F)
LKS1aF-5V	5	3.5	0.5	100	50	250	6.5
LKS1aF-6V	6	4.2	0.6	144	41.7	250	7.8
LKS1aF-9V	9	6.3	0.9	324	27.8	250	11.7
LKS1aF-12V	12	8.4	1.2	576	20.8	250	15.6
LKS1aF-18V	18	12.6	1.8	1,296	13.9	250	23.4
LKS1aF-24V	24	16.8	2.4	2,304	10.4	250	31.2


DIMENSIONS

mm inch

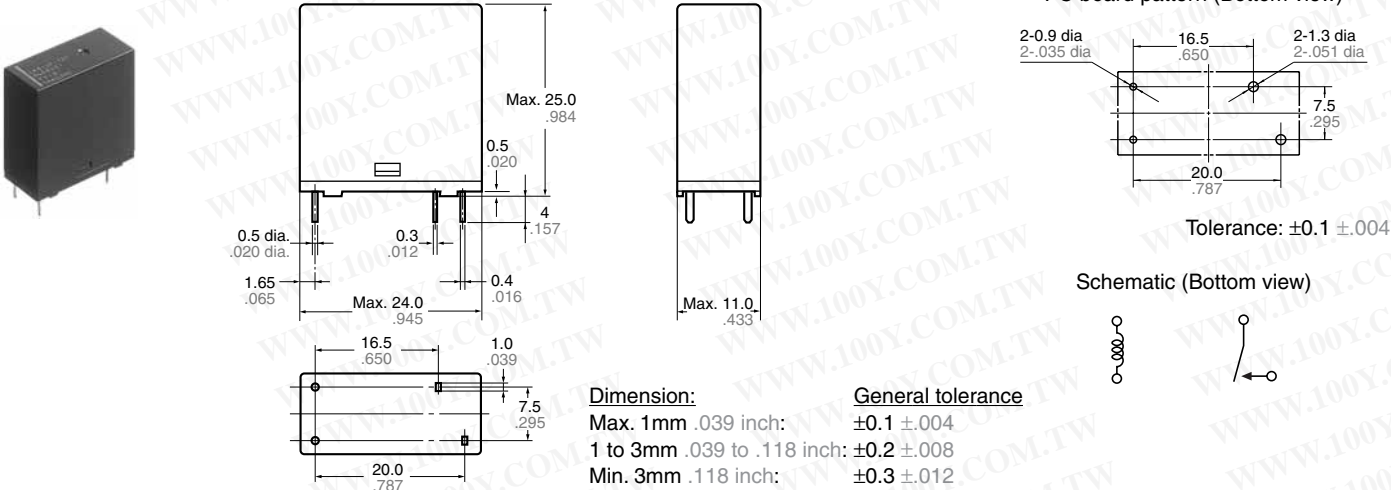


REFERENCE DATA


1. Max. switching power (AC resistive load)

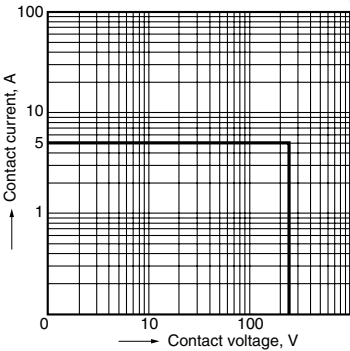

2. Coil temperature rise  
 Sample: LKS1aF-12V, 6 pcs.  
 Point measured: coil inside  
 Contact current: 0 A, 5 A

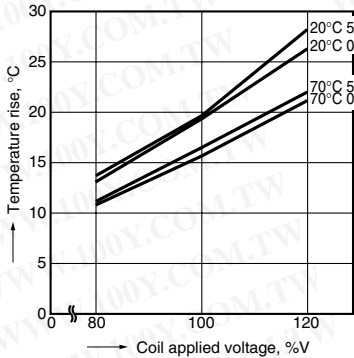


3. Ambient temperature characteristics and coil applied voltage  
 Contact current: 5 A

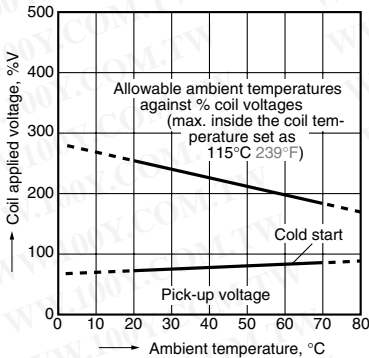

4. Life curve


Operation frequency: 20 times/min.  
 (ON/OFF = 1.5s: 1.5s)  
 Ambient temperature: Room temperature

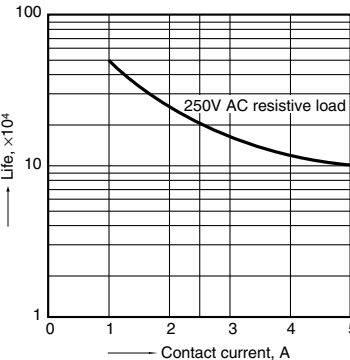


勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

5-(1). Electrical life test  
(5 A 277 V AC, resistive load)  
Sample: LKS1aF-12V, 6 pcs.  
Operation frequency: 20 times/min.  
(ON/OFF = 1.5s: 1.5s)  
Ambient temperature: 20°C 68°F


Circuit:

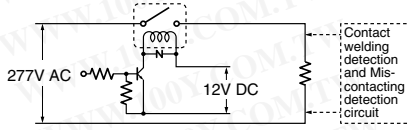

Change of pick-up and drop-out voltage

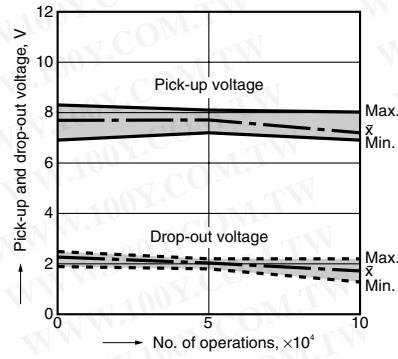


Change of contact resistance

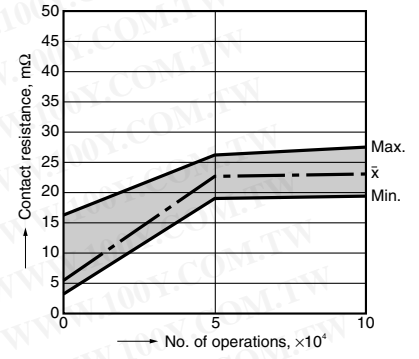


5-(2). Electrical life test  
(UL lamp load test TV-5)  
Tested sample: LKS1aF-12V, 6 pcs.  
• Overload test  
Load: 7.5 A 120 V AC (60 Hz),  
Inrush: 111 A  
Operation frequency: 10 times/min  
(ON: OFF = 1 s: 5 s)  
No. of operations: 50 ope.  
• Endurance test  
Load: 5A 120 V AC (60 Hz),  
Inrush: 78 A  
Operation frequency: 10 times/min  
(ON: OFF = 1 s: 5 s)  
No. of operations: 25,000 ope.

Change of pick-up and drop-out voltage

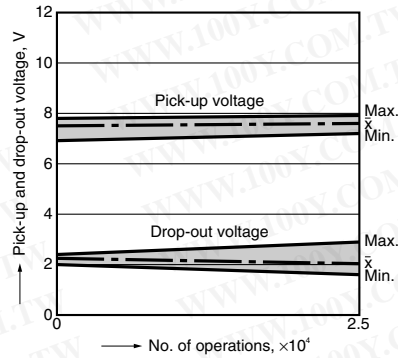

Change of contact resistance

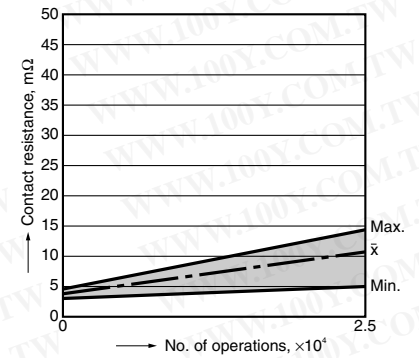

**For Cautions for Use, see Relay Technical Information .**

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)