

# BIPOLAR ANALOG INTEGRATED CIRCUITS

## $\mu$ PC7800A SERIES

### THREE TERMINAL POSITIVE VOLTAGE REGULATORS

#### DESCRIPTION

$\mu$ PC7800A series are monolithic three terminal positive regulators which employ internally current limiting, thermal shut down, output transistor safe operating area protection make them essentially indestructible.

They are improved for ripple rejection ratio, line regulation, load regulation and quiescent current, as comparison of conventional  $\mu$ PC7800 series.

#### FEATURES

- Wide operation temperature range.
- High ripple rejection ratio.
- Good regulation (line, load).
- Low quiescent current.
- Built-in protection circuits.  
(over current protection, SOA protection and thermal shut down)

勝特力材料 886-3-5753170

胜特力电子(上海) 86-21-54151736

胜特力电子(深圳) 86-755-83298787


[Http://www.100y.com.tw](http://www.100y.com.tw)

#### ORDER INFORMATION


TYPE NUMBER	OUTPUT VOLTAGE	PACKAGE	QUALITY GRADE
$\mu$ PC7805AHF	5 V		
$\mu$ PC7808AHF	8 V		
$\mu$ PC7893AHF	9.3 V		
$\mu$ PC7812AHF	12 V	MP-45G(ISOLATED TO-220)	Standard
$\mu$ PC7815AHF	15 V		
$\mu$ PC7818AHF	18 V		
$\mu$ PC7824AHF	24 V		

Please refer to "Quality grade on NEC Semiconductor Devices" (Document number IEI-1209) published by NEC Corporation to know the specification of quality grade on the devices and its recommended applications.

#### EQUIVALENT CIRCUIT

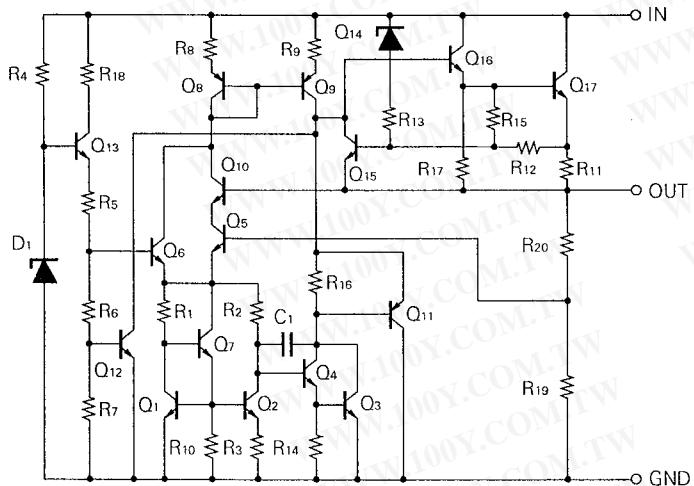

#### CONNECTION DIAGRAM




ABSOLUTE MAXIMUM RATINGS ( $T_a = 25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT
Input Voltage	$V_{IN}$	35/40 (Note1)	V
Internal Power Dissipation	$P_T$	15 (Note2)	W
Operating Ambient Temperature Range	$T_{opt}$	-30 to +85	$^\circ\text{C}$
Operating Junction Temperature Range	$T_{opt(j)}$	-30 to +150	$^\circ\text{C}$
Storage Temperature Range	$T_{stg}$	-55 to +150	$^\circ\text{C}$
Thermal Resistance (junction to case)	$R_{th(j-c)}$	5	$^\circ\text{C}/\text{W}$
Thermal Resistance (junction to ambient)	$R_{th(j-a)}$	65	$^\circ\text{C}/\text{W}$

(Note1)  $\mu$ PC7805A, 08A, 93A, 12A, 15A, 18A : 35 V,  $\mu$ PC7824A : 40 V

(Note2) Internally limited

## TYPICAL CONNECTION

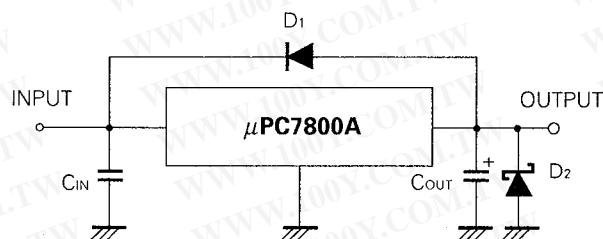

C1: Required if regulator is located an appreciable distance from power supply filter.

C2: More than 0.1  $\mu\text{F}$ D1: Needed for  $V_{IN} < V_o$ D2: Needed for  $V_o < \text{GND}$ 

## RECOMMENDED OPERATING CONDITIONS

CHARACTERISTIC	SYMBOL		MIN.	TYP.	MAX.	UNIT
Input Voltage	$V_{IN}$	$\mu$ PC7805AHF	7	10	25	V
		$\mu$ PC7808AHF	10.5	14	25	
		$\mu$ PC7893AHF	12	15	24.5	
		$\mu$ PC7812AHF	14.5	19	30	
		$\mu$ PC7815AHF	17.5	23	30	
		$\mu$ PC7818AHF	21	27	33	
		$\mu$ PC7824AHF	27	33	38	
Output Current	$I_o$	All	0.005	0.5	1	A
Operating Junction Temperature Range	$T_{opt(j)}$	All	-30		+125	$^\circ\text{C}$

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

ELECTRICAL CHARACTERISTICS  $\mu$ PC7805A(V<sub>IN</sub> = 10 V, I<sub>O</sub> = 500 mA, 0 °C ≤ T<sub>j</sub> ≤ + 125 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>O</sub>	T <sub>j</sub> = 25 °C	4.8	5.0	5.2	V
		7 V ≤ V <sub>IN</sub> ≤ 20 V, 5 mA ≤ I <sub>O</sub> ≤ 1 A, P <sub>T</sub> ≤ 15 W	4.75		5.25	
		- 30 °C ≤ T <sub>j</sub> ≤ + 125 °C	4.75		5.25	
Line Regulation	REG <sub>IN</sub>	T <sub>j</sub> = 25 °C, 7 V ≤ V <sub>IN</sub> ≤ 25 V		7	30	mV
		T <sub>j</sub> = 25 °C, 8 V ≤ V <sub>IN</sub> ≤ 12 V		2	15	
Load Regulation	REG <sub>L</sub>	T <sub>j</sub> = 25 °C, 5 mA ≤ I <sub>O</sub> ≤ 1.5 A		4	30	mV
		T <sub>j</sub> = 25 °C, 250 mA ≤ I <sub>O</sub> ≤ 750 mA		2	10	
Quiescent Current	I <sub>BIAS</sub>	T <sub>j</sub> = 25 °C		2.8	4.3	mA
Quiescent Current Change	ΔI <sub>BIAS</sub>	7 V ≤ V <sub>IN</sub> ≤ 25 V			1.0	mA
		5 mA ≤ I <sub>O</sub> ≤ 1.0 A			0.5	
Output Noize Voltage	V <sub>n</sub>	T <sub>j</sub> = 25 °C, 10 Hz ≤ f ≤ 100 kHz		40	200	μV <sub>r.m.s.</sub>
Ripple Rejection	R•R	T <sub>j</sub> = 25 °C, f = 120 Hz, 8 V ≤ V <sub>IN</sub> ≤ 18 V	70	76		dB
Dropout Voltage	V <sub>DIF</sub>	T <sub>j</sub> = 25 °C, I <sub>O</sub> = 1.0 A		1.8		V
Short Circuit Current	I <sub>Oshort</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 25 V		1.6		A
Peak Output Current	I <sub>Opeak</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 10 V	1.7	2.2	2.8	A
Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT	I <sub>O</sub> = 5 mA, 0 °C ≤ T <sub>j</sub> ≤ + 125 °C		- 0.4		mV/°C

ELECTRICAL CHARACTERISTICS  $\mu$ PC7808A(V<sub>IN</sub> = 14 V, I<sub>O</sub> = 500 mA, 0 °C ≤ T<sub>j</sub> ≤ + 125 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>O</sub>	T <sub>j</sub> = 25 °C	7.7	8.0	8.3	V
		10.5 V ≤ V <sub>IN</sub> ≤ 23 V, 5 mA ≤ I <sub>O</sub> ≤ 1 A, P <sub>T</sub> ≤ 15 W	7.6		8.4	
		- 30 °C ≤ T <sub>j</sub> ≤ + 125 °C	7.6		8.4	
Line Regulation	REG <sub>IN</sub>	T <sub>j</sub> = 25 °C, 10.5 V ≤ V <sub>IN</sub> ≤ 25 V		8	35	mV
		T <sub>j</sub> = 25 °C, 11 V ≤ V <sub>IN</sub> ≤ 17 V		3	25	
Load Regulation	REG <sub>L</sub>	T <sub>j</sub> = 25 °C, 5 mA ≤ I <sub>O</sub> ≤ 1.5 A		12	90	mV
		T <sub>j</sub> = 25 °C, 250 mA ≤ I <sub>O</sub> ≤ 750 mA		4	20	
Quiescent Current	I <sub>BIAS</sub>	T <sub>j</sub> = 25 °C		3	4.4	mA
Quiescent Current Change	ΔI <sub>BIAS</sub>	10.5 V ≤ V <sub>IN</sub> ≤ 25 V			1.0	mA
		5 mA ≤ I <sub>O</sub> ≤ 1.0 A			0.5	
Output Noize Voltage	V <sub>n</sub>	T <sub>j</sub> = 25 °C, 10 Hz ≤ f ≤ 100 kHz		50	250	μV <sub>r.m.s.</sub>
Ripple Rejection	R•R	T <sub>j</sub> = 25 °C, f = 120 Hz, 11.5 V ≤ V <sub>IN</sub> ≤ 21.5 V	66	72		dB
Dropout Voltage	V <sub>DIF</sub>	T <sub>j</sub> = 25 °C, I <sub>O</sub> = 1.0 A		1.8		V
Short Circuit Current	I <sub>Oshort</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 25 V		1.6		A
Peak Output Current	I <sub>Opeak</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 14 V	1.7	2.2	2.8	A
Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT	I <sub>O</sub> = 5 mA, 0 °C ≤ T <sub>j</sub> ≤ + 125 °C		- 0.6		mV/°C

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

ELECTRICAL CHARACTERISTICS  $\mu$ PC7812A(V<sub>IN</sub> = 19 V, I<sub>O</sub> = 500 mA, 0 °C ≤ T<sub>j</sub> ≤ + 125 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>O</sub>	T <sub>j</sub> = 25 °C	11.5	12.0	12.5	V
		14.5 V ≤ V <sub>IN</sub> ≤ 27 V, 5 mA ≤ I <sub>O</sub> ≤ 1 A, P <sub>T</sub> ≤ 15 W	11.4		12.6	
		-30 °C ≤ T <sub>j</sub> ≤ +125 °C	11.4		12.6	
Line Regulation	REG <sub>IN</sub>	T <sub>j</sub> = 25 °C, 14.5 V ≤ V <sub>IN</sub> ≤ 30 V		10	45	mV
		T <sub>j</sub> = 25 °C, 16 V ≤ V <sub>IN</sub> ≤ 22 V		4	30	
Load Regulation	REG <sub>L</sub>	T <sub>j</sub> = 25 °C, 5 mA ≤ I <sub>O</sub> ≤ 1.5 A		17	130	mV
		T <sub>j</sub> = 25 °C, 250 mA ≤ I <sub>O</sub> ≤ 750 mA		6	30	
Quiescent Current	I <sub>BIAS</sub>	T <sub>j</sub> = 25 °C		3.1	4.6	mA
Quiescent Current Change	ΔI <sub>BIAS</sub>	14.5 V ≤ V <sub>IN</sub> ≤ 30 V			1.0	mA
		5 mA ≤ I <sub>O</sub> ≤ 1.0 A			0.5	
Output Noize Voltage	V <sub>n</sub>	T <sub>j</sub> = 25 °C, 10 Hz ≤ f ≤ 100 kHz		70	300	μV <sub>r.m.s.</sub>
Ripple Rejection	R <sub>R</sub> R	T <sub>j</sub> = 25 °C, f = 120 Hz, 15 V ≤ V <sub>IN</sub> ≤ 25 V	62	68		dB
Dropout Voltage	V <sub>DIF</sub>	T <sub>j</sub> = 25 °C, I <sub>O</sub> = 1.0 A		1.8		V
Short Circuit Current	I <sub>Oshort</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 30 V		1.3		A
Peak Output Current	I <sub>Opeak</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 19 V	1.7	2.2	2.8	A
Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT	I <sub>O</sub> = 5 mA, 0 °C ≤ T <sub>j</sub> ≤ +125 °C		-0.8		mV/°C

ELECTRICAL CHARACTERISTICS  $\mu$ PC7815A(V<sub>IN</sub> = 23 V, I<sub>O</sub> = 500 mA, 0 °C ≤ T<sub>j</sub> ≤ + 125 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>O</sub>	T <sub>j</sub> = 25 °C	14.4	15.0	15.6	V
		17.5 V ≤ V <sub>IN</sub> ≤ 30 V, 5 mA ≤ I <sub>O</sub> ≤ 1 A, P <sub>T</sub> ≤ 15 W	14.25		15.75	
		-30 °C ≤ T <sub>j</sub> ≤ +125 °C	14.25		15.75	
Line Regulation	REG <sub>IN</sub>	T <sub>j</sub> = 25 °C, 17.5 V ≤ V <sub>IN</sub> ≤ 30 V		10	45	mV
		T <sub>j</sub> = 25 °C, 20 V ≤ V <sub>IN</sub> ≤ 26 V		5	35	
Load Regulation	REG <sub>L</sub>	T <sub>j</sub> = 25 °C, 5 mA ≤ I <sub>O</sub> ≤ 1.5 A		25	190	mV
		T <sub>j</sub> = 25 °C, 250 mA ≤ I <sub>O</sub> ≤ 750 mA		8	40	
Quiescent Current	I <sub>BIAS</sub>	T <sub>j</sub> = 25 °C		3.3	4.8	mA
Quiescent Current Change	ΔI <sub>BIAS</sub>	17.5 V ≤ V <sub>IN</sub> ≤ 30 V			1.0	mA
		5 mA ≤ I <sub>O</sub> ≤ 1.0 A			0.5	
Output Noize Voltage	V <sub>n</sub>	T <sub>j</sub> = 25 °C, 10 Hz ≤ f ≤ 100 kHz		85	400	μV <sub>r.m.s.</sub>
Ripple Rejection	R <sub>R</sub> R	T <sub>j</sub> = 25 °C, f = 120 Hz, 18.5 V ≤ V <sub>IN</sub> ≤ 28.5 V	60	66		dB
Dropout Voltage	V <sub>DIF</sub>	T <sub>j</sub> = 25 °C, I <sub>O</sub> = 1.0 A		1.8		V
Short Circuit Current	I <sub>Oshort</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 30 V		1.3		A
Peak Output Current	I <sub>Opeak</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 23 V	1.7	2.2	2.8	A
Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT	I <sub>O</sub> = 5 mA, 0 °C ≤ T <sub>j</sub> ≤ +125 °C		-1.1		mV/°C

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

ELECTRICAL CHARACTERISTICS  $\mu$ PC7818A(V<sub>IN</sub> = 27 V, I<sub>O</sub> = 500 mA, 0 °C ≤ T<sub>j</sub> ≤ + 125 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>O</sub>	T <sub>j</sub> = 25 °C	17.3	18.0	18.7	V
		21 V ≤ V <sub>IN</sub> ≤ 33 V, 5 mA ≤ I <sub>O</sub> ≤ 1 A, P <sub>T</sub> ≤ 15 W	17.1		18.9	
		- 30 °C ≤ T <sub>j</sub> ≤ + 125 °C	17.1		18.9	
Line Regulation	REG <sub>IN</sub>	T <sub>j</sub> = 25 °C, 21 V ≤ V <sub>IN</sub> ≤ 33 V		12	60	mV
		T <sub>j</sub> = 25 °C, 24 V ≤ V <sub>IN</sub> ≤ 30 V		6	45	
Load Regulation	REG <sub>L</sub>	T <sub>j</sub> = 25 °C, 5 mA ≤ I <sub>O</sub> ≤ 1.5 A		32	110	mV
		T <sub>j</sub> = 25 °C, 250 mA ≤ I <sub>O</sub> ≤ 750 mA		10	40	
Quiescent Current	I <sub>BIAS</sub>	T <sub>j</sub> = 25 °C		3.4	5.0	mA
Quiescent Current Change	ΔI <sub>BIAS</sub>	21 V ≤ V <sub>IN</sub> ≤ 33 V			1.0	mA
		5 mA ≤ I <sub>O</sub> ≤ 1.0 A			0.5	
Output Noize Voltage	V <sub>n</sub>	T <sub>j</sub> = 25 °C, 10 Hz ≤ f ≤ 100 kHz		95	450	μV <sub>r.m.s.</sub>
Ripple Rejection	R•R	T <sub>j</sub> = 25 °C, f = 120 Hz, 22 V ≤ V <sub>IN</sub> ≤ 32 V	59	65		dB
Dropout Voltage	V <sub>DIF</sub>	T <sub>j</sub> = 25 °C, I <sub>O</sub> = 1.0 A		1.8		V
Short Circuit Current	I <sub>Oshort</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 33 V		1.2		A
Peak Output Current	I <sub>Opeak</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 27 V	1.7	2.2	2.8	A
Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT	I <sub>O</sub> = 5 mA, 0 °C ≤ T <sub>j</sub> ≤ + 125 °C		- 1.3		mV/°C

ELECTRICAL CHARACTERISTICS  $\mu$ PC7824A(V<sub>IN</sub> = 33 V, I<sub>O</sub> = 500 mA, 0 °C ≤ T<sub>j</sub> ≤ + 125 °C)

CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>O</sub>	T <sub>j</sub> = 25 °C	23.0	24.0	25.0	V
		27 V ≤ V <sub>IN</sub> ≤ 38 V, 5 mA ≤ I <sub>O</sub> ≤ 1 A, P <sub>T</sub> ≤ 15 W	22.8		25.2	
		- 30 °C ≤ T <sub>j</sub> ≤ + 125 °C	22.8		25.2	
Line Regulation	REG <sub>IN</sub>	T <sub>j</sub> = 25 °C, 27 V ≤ V <sub>IN</sub> ≤ 38 V		15	80	mV
		T <sub>j</sub> = 25 °C, 30 V ≤ V <sub>IN</sub> ≤ 36 V		8	50	
Load Regulation	REG <sub>L</sub>	T <sub>j</sub> = 25 °C, 5 mA ≤ I <sub>O</sub> ≤ 1.5 A		44	150	mV
		T <sub>j</sub> = 25 °C, 250 mA ≤ I <sub>O</sub> ≤ 750 mA		14	50	
Quiescent Current	I <sub>BIAS</sub>	T <sub>j</sub> = 25 °C		3.6	5.3	mA
Quiescent Current Change	ΔI <sub>BIAS</sub>	27 V ≤ V <sub>IN</sub> ≤ 38 V			1.0	mA
		5 mA ≤ I <sub>O</sub> ≤ 1.0 A			0.5	
Output Noize Voltage	V <sub>n</sub>	T <sub>j</sub> = 25 °C, 10 Hz ≤ f ≤ 100 kHz		120	500	μV <sub>r.m.s.</sub>
Ripple Rejection	R•R	T <sub>j</sub> = 25 °C, f = 120 Hz, 28 V ≤ V <sub>IN</sub> ≤ 38 V	55	62		dB
Dropout Voltage	V <sub>DIF</sub>	T <sub>j</sub> = 25 °C, I <sub>O</sub> = 1.0 A		2.0		V
Short Circuit Current	I <sub>Oshort</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 38 V		1.0		A
Peak Output Current	I <sub>Opeak</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 33 V	1.7	2.2	2.8	A
Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT	I <sub>O</sub> = 5 mA, 0 °C ≤ T <sub>j</sub> ≤ + 125 °C		- 1.7		mV/°C

勝特力材料 886-3-5753170

胜特力电子(上海) 86-21-54151736

胜特力电子(深圳) 86-755-83298787

Http://www.100y.com.tw

ELECTRICAL CHARACTERISTICS  $\mu$ PC7893A(V<sub>IN</sub> = 15 V, I<sub>O</sub> = 500 mA, 0 °C ≤ T<sub>j</sub> ≤ + 125 °C)







CHARACTERISTIC	SYMBOL	TEST CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	V <sub>O</sub>	T <sub>j</sub> = 25 °C	9.0	9.3	9.5	V
		12 V ≤ V <sub>IN</sub> ≤ 24.5 V, 5 mA ≤ I <sub>O</sub> ≤ 1 A, P <sub>R</sub> ≤ 15 W	8.9		9.7	
		- 30 °C ≤ T <sub>j</sub> ≤ + 125 °C	8.9		9.7	
Line Regulation	REG <sub>IN</sub>	T <sub>j</sub> = 25 °C, 12 V ≤ V <sub>IN</sub> ≤ 26.5 V		9	40	mV
		T <sub>j</sub> = 25 °C, 12.5 V ≤ V <sub>IN</sub> ≤ 18.5 V		4	30	
Load Regulation	REG <sub>L</sub>	T <sub>j</sub> = 25 °C, 5 mA ≤ I <sub>O</sub> ≤ 1.5 A		15	110	mV
		T <sub>j</sub> = 25 °C, 250 mA ≤ I <sub>O</sub> ≤ 750 mA		5	25	
Quiescent Current	I <sub>BIAS</sub>	T <sub>j</sub> = 25 °C		3.1	4.5	mA
Quiescent Current Change	ΔI <sub>BIAS</sub>	12V ≤ V <sub>IN</sub> ≤ 26.5 V			1.0	mA
		5 mA ≤ I <sub>O</sub> ≤ 1.0 A			0.5	
Output Noize Voltage	V <sub>n</sub>	T <sub>j</sub> = 25 °C, 10 Hz ≤ f ≤ 100 kHz		55	230	μV <sub>r.m.s.</sub>
Ripple Rejection	R <sub>R</sub>	T <sub>j</sub> = 25 °C, f = 120 Hz, 12.5 V ≤ V <sub>IN</sub> ≤ 22.5 V	64	70		dB
Dropout Voltage	V <sub>DIF</sub>	T <sub>j</sub> = 25 °C, I <sub>O</sub> = 1.0 A		1.8		V
Short Circuit Current	I <sub>Oshort</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 26.5 V		1.5		A
Peak Output Current	I <sub>Opeak</sub>	T <sub>j</sub> = 25 °C, V <sub>IN</sub> = 15 V	1.7	2.2	2.8	A
Temperature Coefficient of Output Voltage	ΔV <sub>O</sub> /ΔT	I <sub>O</sub> = 5 mA, 0 °C ≤ T <sub>j</sub> ≤ + 125 °C		- 0.7		mV/°C

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787


[Http://www.100y.com.tw](http://www.100y.com.tw)

TYPICAL CHARACTERISTICS ( $T_a = 25^\circ\text{C}$ )



勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

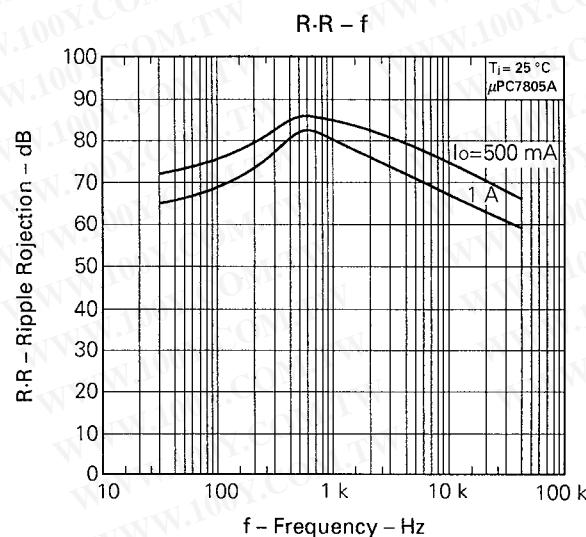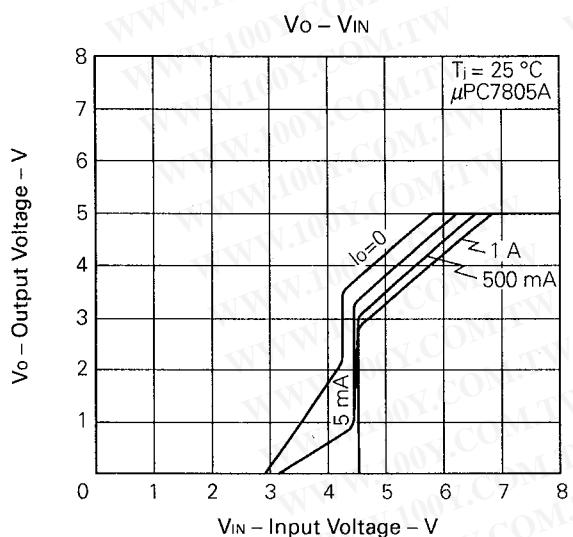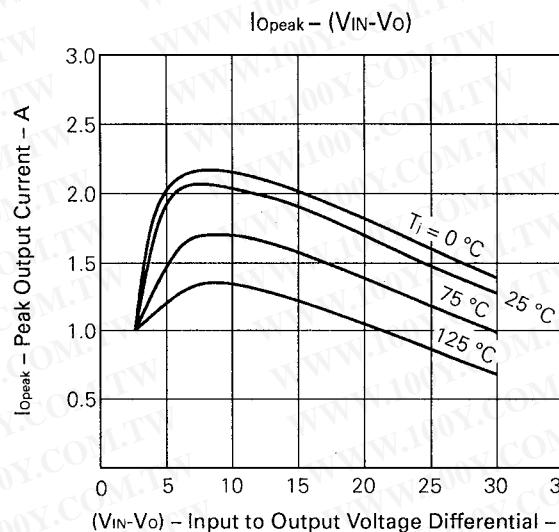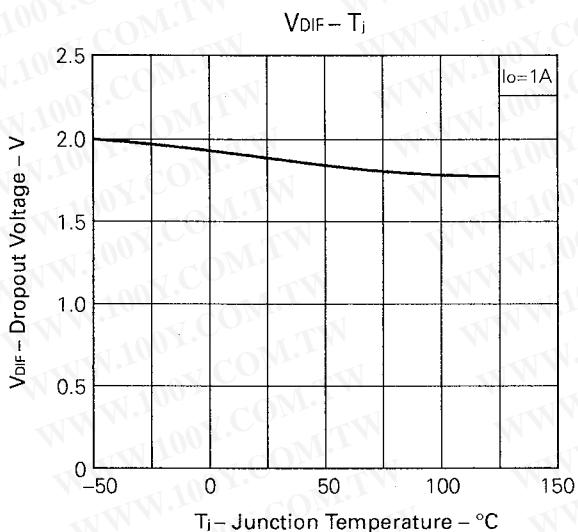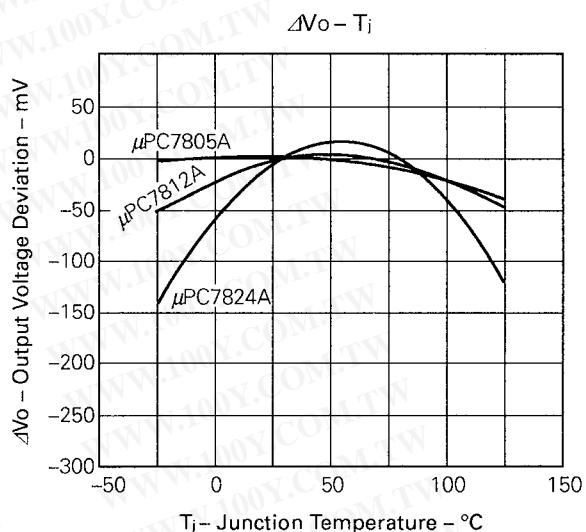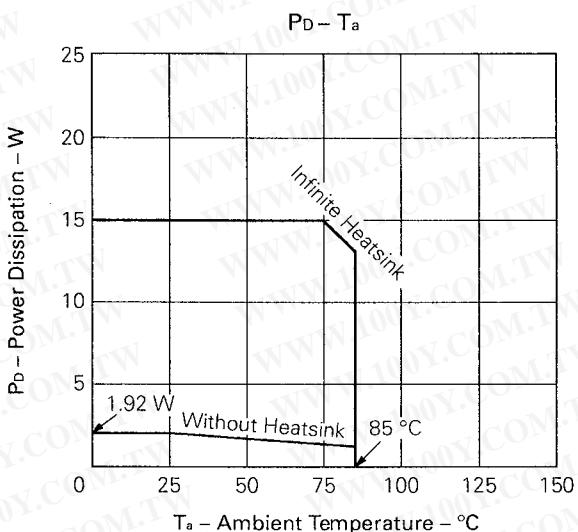

## LINE TRANSIENT RESPONSE

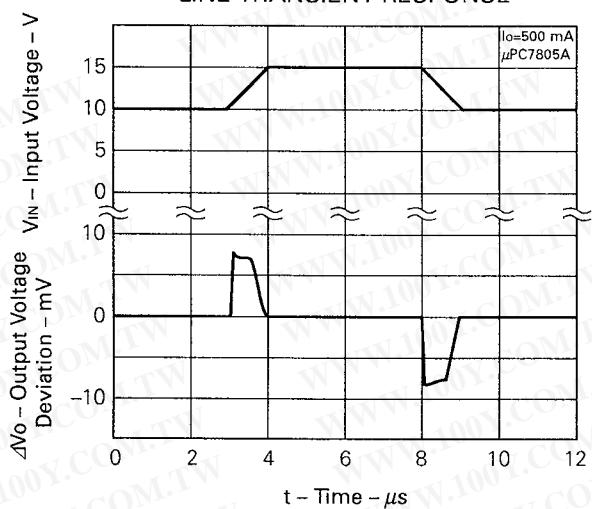


## LOAD TRANSIENT RESPONSE

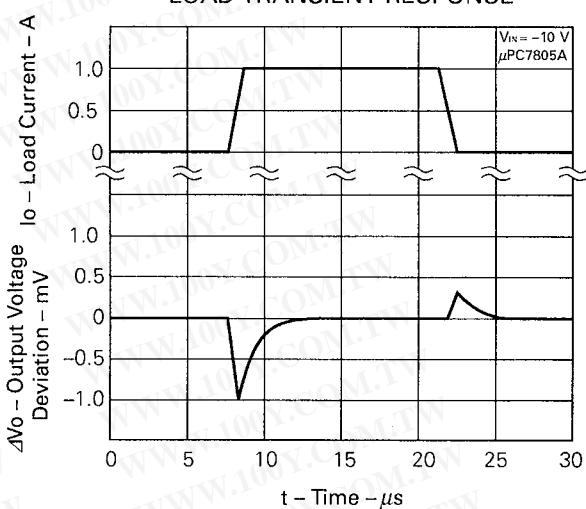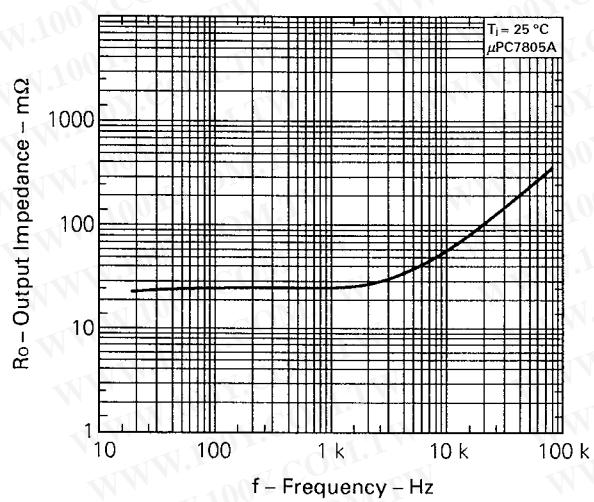 $R_o - f$ 

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-54151736  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## PACKAGE DIMENSIONS

## 3PIN PLASTIC SIP (MP-45G)

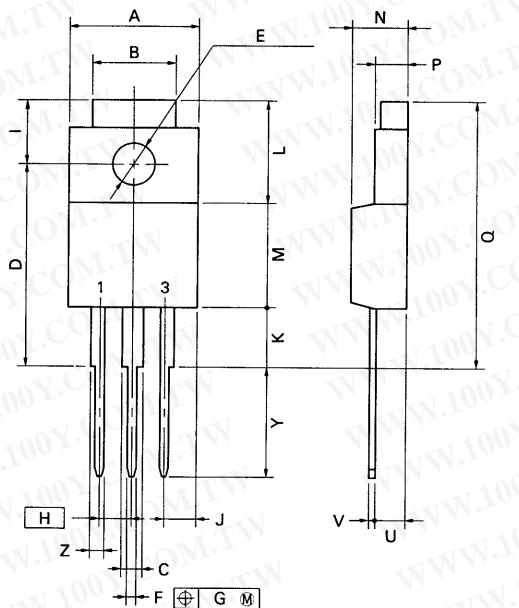

P3HF-254B-1

## NOTE

Each lead centerline is located within 0.25 mm (0.01 inch) of its true position (T.P.) at maximum material condition.

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

ITEM	MILLIMETERS	INCHES
A	10.4 MAX.	0.410 MAX.
B	7.0	0.276
C	1.2 MIN.	0.047 MIN.
D	$17.0^{+0.3}$	$0.669^{+0.012}_{-0.012}$
E	$\phi 3.3^{+0.2}$	$\phi 0.130^{+0.008}$
F	$0.75^{+0.10}$	$0.030^{+0.004}_{-0.005}$
G	0.25	0.010
H	2.54 (T.P.)	0.100 (T.P.)
I	$5.0^{+0.3}$	$0.197^{+0.012}$
J	2.66 MAX.	0.105 MAX.
K	4.8 MIN.	0.188 MIN.
L	8.5	0.335
M	8.5	0.335
N	$4.5^{+0.2}$	$0.177^{+0.008}$
P	$2.8^{+0.2}$	$0.110^{+0.009}_{-0.008}$
Q	22.4 MAX.	0.882 MAX.
U	$2.4^{+0.5}$	$0.094^{+0.021}_{-0.020}$
V	$0.65^{+0.10}$	$0.026^{+0.004}_{-0.005}$
Y	$8.9^{+0.7}$	$0.350^{+0.028}$
Z	1.0 MIN.	0.039 MIN.

**RECOMMENDED SOLDERING CONDITIONS**

The following conditions (see table below) must be met when soldering this product.

Please consult with our sales offices in case other soldering process is used, or in case soldering is done under different conditions.

**TYPES OF THROUGH HOLE MOUNT DEVICE**

$\mu$ PC7800AHF Series

Soldering process	Soldering conditions	Symbol
Wave soldering	Solder temperature : 260 °C or below. Flow time : 10 seconds or below.	

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## [MEMO]

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-54151736  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## [MEMO]

No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.

NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.

The devices listed in this document are not suitable for use in aerospace equipment, submarine cables, nuclear reactor control systems and life support systems. If customers intend to use NEC devices for above applications or they intend to use "Standard" quality grade NEC devices for applications not intended by NEC, please contact our sales people in advance.

Application examples recommended by NEC Corporation.

Standard: Computer, Office equipment, Communication equipment, Test and Measurement equipment,  
Machine tools, Industrial robots, Audio and Visual equipment, Other consumer products, etc.

Special: Automotive and Transportation equipment, Traffic control systems, Antidisaster systems, Anticrime systems, etc.

M4 92.6

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-54151736  
胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)