



# SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS

CAT. No. E1001H (Ver.2)

INDEX		
PRODUCT SEARCH	SERIES TABLE	➔
	GROUP CHART	➔
PRODUCTION GUIDE	PRECAUTIONS AND GUIDELINES (Aluminum Electrolytic Capacitor)	➔
	PART NUMBERING SYSTEM	➔
	ENVIRONMENTAL CONSIDERATION	➔
	PACKAGING	➔
	TAPING SPECIFICATIONS	➔
	RECOMMENDED REFLOW CONDITION	➔
	STANDARDIZATION	➔
	WORLD-WIDE MANUFACTURING LOCATIONS	➔
PRODUCT SPECIFICATIONS	CHIP TYPE	➔
RELIABILITY DATA		➔
APPENDIX (GLOBAL CODE)		➔

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Series	Features	Endurance (+R=With ripple)	Standard type	Low impedance	Solvent resistant	Terminal type	Rated voltage range (Vdc)	Capacitance range (µF)		
			●	●	●					
Conductive Polymer Electrolyte Type	PXF	Vertical type, super low ESR	105°C 2,000 hours	●	●	●	SMD	2.5 to 6.3	220 to 1,000	
	PXE	Vertical type, super low ESR	105°C 2,000 hours	●	●	●	SMD	2.5 to 16	33 to 2,700	
	PXA (Upgrade!)	Vertical type, super low ESR	105°C 1,000 to 2,000 hours	●	●	●	SMD	2.5 to 25	3.3 to 1,500	
	PXH	125°C Vertical type	125°C 1,000 hours	●	●	●	SMD	2.5 to 20	22 to 1,000	
	PSC (Upgrade!)	Radial lead type, super low ESR, high ripple current	105°C 2,000 hours	●	●	●	Radial	2.5 to 16	270 to 2,700	
	PSA (Upgrade!)	Super low ESR, high ripple current	105°C 2,000 hours	●	●	●	Radial	2.5 to 16	47 to 1,500	
	PS (Upgrade!)	Radial lead type, super low ESR	105°C 2,000 hours	●	●	●	Radial	2.5 to 35	18 to 1,500	
	PSL (NEW!)	Low ESL (Ask Engineering Bulletin No791 in detail)	105°C 2,000 hours	●	●	●	Radial	2.5	560	
Miniature Surface Mount	Vertical Type	MVS	4.5mm height	85°C 2,000 hours	●	●	●	SMD	4 to 50	0.1 to 220
		MVA	5.5 to 22.0mm max. height, downsized	85°C 2,000 hours	●	●	▲	SMD	4 to 450	0.1 to 10,000
		MV	5.5 to 10.5mm max. height	85°C 1,000 to 2,000 hours	●	●	●	SMD	4 to 63	0.1 to 1,000
		MVE	5.5 to 22.0mm max. height, downsized	105°C 1,000 to 2,000 hours	●	●	▲	SMD	6.3 to 450	0.47 to 6,800
		MVK	5.5 to 10.5mm max. height	105°C 1,000 to 2,000 hours	●	●	●	SMD	6.3 to 50	0.1 to 1,000
		MKA	5.5 to 10.5mm max. height (Ask Engineering Bulletin No704 in detail)	105°C 1,000 to 2,000 hours	●	●	●	SMD	6.3 to 50	0.1 to 1,000
		MZA	6.1 to 10.5mm max. height, very low impedance	105°C 2,000 hours	●	●	●	SMD	6.3 to 80	3.3 to 1,500
		MVY	5.5 to 22.0mm max. height	105°C 1,000 to 5,000 hours	●	●	▲	SMD	6.3 to 100	1.0 to 8,200
		MZE (NEW!)	105°C 7,000/8,000 hours, low impedance, long life	105°C 7,000 to 8,000 hours	●	●	●	SMD	6.3 to 50	10 to 470
		MZD	105°C 5,000 hours, low impedance, long life	105°C 5,000 hours	●	●	●	SMD	6.3 to 50	10 to 470
		MLA	Low impedance, long life	105°C 3,000 hours	●	●	●	SMD	6.3 to 50	10 to 1,000
		MVJ	6.0mm max. height	105°C 2,000 hours	●	●	●	SMD	6.3 to 50	0.1 to 100
		MLE (NEW!)	105°C 7,000/8,000 hours, long life	105°C 7,000 to 8,000 hours	●	●	●	SMD	6.3 to 50	0.1 to 1,000
		MLD	105°C 5,000 hours, long life	105°C 5,000 hours	●	●	●	SMD	6.3 to 50	0.1 to 1,000
		MVL	6.0 to 10.5mm max. height	105°C 3,000 to 5,000 hours	●	●	●	SMD	6.3 to 50	0.1 to 1,000
		MVH	6.0 to 22.0mm max. height	125°C 1,000 to 5,000 hours	●	●	▲	SMD	10 to 450	3.3 to 4,700
		MHB (NEW!)	10.5mm max. height	125°C 2,000 hours	●	●	●	SMD	10 to 35	47 to 470
		MKB	10.5mm max. height	105°C 3,000 hours	●	●	●	SMD	400	2.2 to 4.7
		MV-BP	5.5mm max. height, bi-polar	85°C 2,000 hours	●	●	●	SMD	4 to 50	0.1 to 47
MVK-BP	6.0mm max. height, bi-polar	105°C 1,000 hours	●	●	●	SMD	6.3 to 50	0.1 to 47		
Miniature	Low Profile	SRM	5mm height, downsized	85°C 1,000 hours	●	●	●	Radial	4 to 50	0.1 to 330
		SRE	5mm height	85°C 1,000 hours	●	●	●	Radial	4 to 50	0.1 to 100
		KRE	5mm height	105°C 1,000 hours	●	●	●	Radial	6.3 to 50	0.1 to 100
		SRA	7mm height	85°C 1,000 hours	●	●	●	Radial	4 to 63	0.1 to 470
		KMA	7mm height	105°C 1,000 hours	●	●	●	Radial	4 to 63	0.1 to 220
		SRG	φ4×7 to φ18×25mm, low profile	85°C 1,000 to 2,000 hours	●	●	●	Radial	4 to 50	0.1 to 10,000
		KRG	φ4×7 to φ18×25mm, low profile	105°C 1,000 hours	●	●	●	Radial	6.3 to 50	0.1 to 10,000
	General Purpose	SMQ	Downsized	85°C 2,000 hours	●	●	●	Radial	6.3 to 450	0.1 to 47,000
		KMQ	Downsized	105°C 1,000 to 2,000 hours +R	●	●	▲	Radial	6.3 to 450	0.1 to 47,000
		SMG	General, downsized	85°C 2,000 hours	●	●	▲	Radial	6.3 to 450	0.1 to 39,000
		KMG	General, downsized	105°C 1,000 to 2,000 hours +R	●	●	▲	Radial	6.3 to 450	0.1 to 22,000
		SME-BP	Bi-polar, general	85°C 2,000 hours	●	●	●	Radial	6.3 to 100	0.47 to 6,800
		KME-BP	Bi-polar, general	105°C 1,000 hours	●	●	●	Radial	6.3 to 100	0.47 to 6,800
High Frequency Use	KZM	Lowest impedance, long life	105°C 6,000 to 10,000 hours +R	●	●	●	Radial	6.3 to 50	27 to 10,000	
	KZH	Lowest impedance, long life	105°C 5,000 to 6,000 hours +R	●	●	●	Radial	6.3 to 35	47 to 8,200	
	KZE	Lowest impedance, long life	105°C 1,000 to 5,000 hours +R	●	●	●	Radial	6.3 to 100	6.8 to 6,800	
	KY	Low impedance, long life	105°C 4,000 to 10,000 hours +R	●	●	●	Radial	6.3 to 100	0.47 to 18,000	
	LXZ	Low impedance, downsized	105°C 2,000 to 8,000 hours +R	●	●	●	Radial	6.3 to 63	12 to 18,000	
	LXY	Low impedance, high reliability	105°C 2,000 to 8,000 hours +R	●	●	●	Radial	10 to 63	10 to 8,200	
	LXV	Low impedance	105°C 2,000 to 5,000 hours +R	●	●	●	Radial	6.3 to 100	5.6 to 15,000	

■ : Promotional products

▲ : Some of range are solvent resistant.

Series		Features	Endurance (+R=With ripple)	Standard type	Low impedance	Solvent resistant	Terminal type	Rated voltage range (Vdc)	Capacitance range (μF)	
Miniature	High Reliability	KXJ	Downsized, long life, for input filtering	105°C 10,000 to 12,000 hours +R	●		Radial	160 to 450	6.8 to 680	
		KXG	Downsized, long life, for input filtering	105°C 8,000 to 10,000 hours +R	●		Radial	160 to 450	6.8 to 330	
		SMH	φ20×20 to φ22×50mm	85°C 2,000 hours +R	●		Radial	160 to 450	33 to 470	
		KMH	φ20×20 to φ22×50mm	105°C 2,000 hours +R	●		Radial	160 to 450	33 to 470	
		PAG	Low profile, for input filtering	105°C 2,000 hours +R			Radial	200 to 450	18 to 560	
		KLJ	Downsized, no sparks with DC overvoltage	105°C 2,000 hours +R			Radial	200 & 400	4.7 to 330	
		KLG	No sparks with DC overvoltage	105°C 2,000 hours +R			Radial	200 & 400	22 to 330	
		FL	Long life	105°C 3,000 hours +R		●	Radial	6.3 to 50	0.47 to 270	
		GPA	125°C, downsized, low impedance	125°C 3,000 to 5,000 hours +R	●	●	Radial	25 to 50	470 to 6,800	
		GXE	125°C, downsize, low impedance	125°C 2,000 to 5,000 hours +R	●	▲	Radial	10 to 450	4.7 to 4,700	
	GXL	125°C Long life	125°C 5,000 hours +R		●	Radial	10 to 50	100 to 1,000		
	Special Application	LBG	For airbag	105°C 5,000 hours +R		●	●	Radial	25 & 35	1,000 to 11,000
		KZG	For PC motherboard	105°C 2,000 hours +R		●		Radial	6.3 to 16	470 to 3,300
		LLA	Low DC leakage, general	85°C 1,000 hours			●	Radial	6.3 to 50	0.1 to 15,000
PH		For photo flash	55°C 5,000 times charging				Radial	300 & 330	—	
Snap-in	General Purpose	KMR	105°C, Snap-in terminal, super downsized	105°C 2,000 hours +R	●		Pin	160 to 450	100 to 3,900	
		SMQ	Snap-in terminal, more downsized	85°C 2,000 hours +R	●		Pin	160 to 450	82 to 3,900	
		KMQ	Snap-in terminal, more downsized	105°C 2,000 hours +R	●		Pin	35, 50, 160 to 450	68 to 33,000	
		SMM	Snap-in terminal, downsized	85°C 3,000 hours +R	●		Pin	160 to 450	47 to 3,300	
		KMS	Snap-in terminal, downsized	105°C 3,000 hours +R	●		Pin	160 to 450	82 to 3,300	
		KMM	Snap-in terminal, downsized	105°C 2,000 to 3,000 hours +R	●		Pin	160 to 450	39 to 3,300	
		SMH	Snap-in terminal, general <small>(Refer Engineering Bulletin No585 for 160 to 450V)</small>	85°C 2,000 hours +R	●		Pin	6.3 to 100	820 to 100,000	
		KMH	Snap-in terminal, general <small>(Refer Engineering Bulletin No584 for 160 to 450V)</small>	105°C 2,000 hours +R	●		Pin	6.3 to 100	560 to 82,000	
	Low Profile	SLM	15mm height	85°C 2,000 hours +R			Pin	160 to 400	47 to 560	
		KLM	15mm height	105°C 2,000 hours +R			Pin	160 to 400	39 to 390	
	High Reliability	LXM	Long life	105°C 7,000 hours +R			Pin	160 to 450	47 to 2,200	
		LXS	Snap-in terminal downsized	105°C 5,000 hours +R	●		Pin	160 to 450	82 to 3,300	
		LXQ	Long life, downsized	105°C 5,000 hours +R			Pin	160 to 450	82 to 2,700	
		LXG	Long life	105°C 5,000 hours +R			Pin	10 to 100	390 to 47,000	
CHA		No sparks with DC overvoltage, downsized	105°C 2,000 hours +R			Pin	200 to 450	56 to 1,200		
LXH		No sparks with DC overvoltage	105°C 3,000/5,000 hours +R			Pin	200 & 400	68 to 1,500		
KMV <small>(NEW)</small>	For charge and discharge application <small>(Ask Engineering Bulletin No781 in detail)</small>	105°C 3,000 hours +R			Pin	350 to 450	82 to 1,200			
Screw-mount	General Purpose	SME	Screw terminal, general	85°C 2,000 hours +R	●		Screw	10 to 250	560 to 680,000	
		KMH	Screw terminal, general	105°C 2,000 hours +R	●		Screw	10 to 400	180 to 680,000	
	For Inverter	RWG	85°C, high ripple, downsized, long life	85°C 5,000 hours +R			Screw	350 to 450	1,500 to 18,000	
		RWF	High ripple, long life	85°C 5,000 hours +R			Screw	350 to 450	820 to 22,000	
		RWE	High ripple	85°C 2,000 hours +R	●		Screw	350 to 550	100 to 12,000	
		RWY	High ripple, long life, low cost	85°C 5,000 hours +R			Screw	350 to 450	500 to 14,000	
		RWL	High ripple, long life	85°C 20,000 hours +R			Screw	350 to 450	2,200 to 12,000	
		FTP	Ellips can shape, high ripple	85°C 5,000 hours +R			Screw	63 to 450	270 to 21,000	
		LXA	Long life	105°C 2,000/5,000 hours +R			Screw	10 to 525	330 to 390,000	
		LXR	High ripple, long life	105°C 5,000 hours +R			Screw	350 to 450	2,200 to 15,000	
		LWY	Low cost <small>(Ask Engineering Bulletin No714 in detail)</small>	105°C 5,000 hours +R			Screw	350 to 450	460 to 13,000	
RWV <small>(NEW)</small>	For charge and discharge application <small>(Ask Engineering Bulletin No782 in detail)</small>	85°C 5,000 hours +R			Screw	350 to 450	820 to 18,000			


: Promotional products

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-54151736**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)


▲ : Some of range are solvent resistant.

CONDUCTIVE POLYMER ALUMINUM SOLID CAPACITORS

◆SURFACE MOUNT

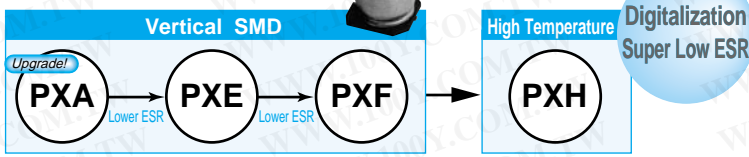


◆RADIAL LEAD

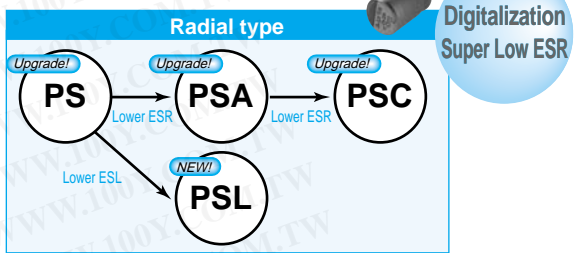


ALUMINUM ELECTROLYTIC CAPACITORS

◆SURFACE MOUNT

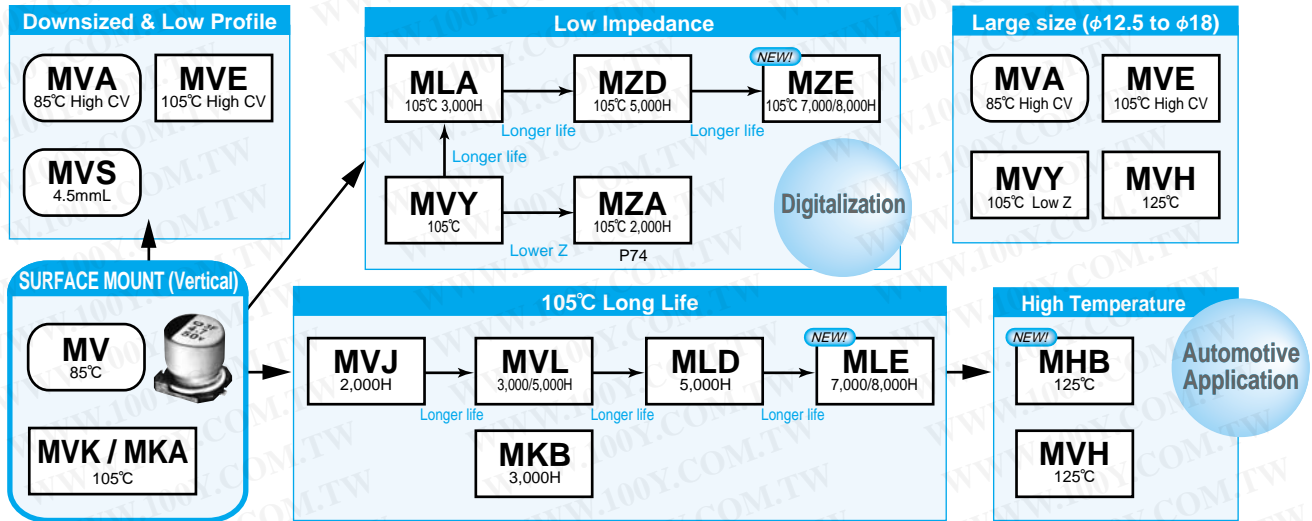


◆RADIAL LEAD

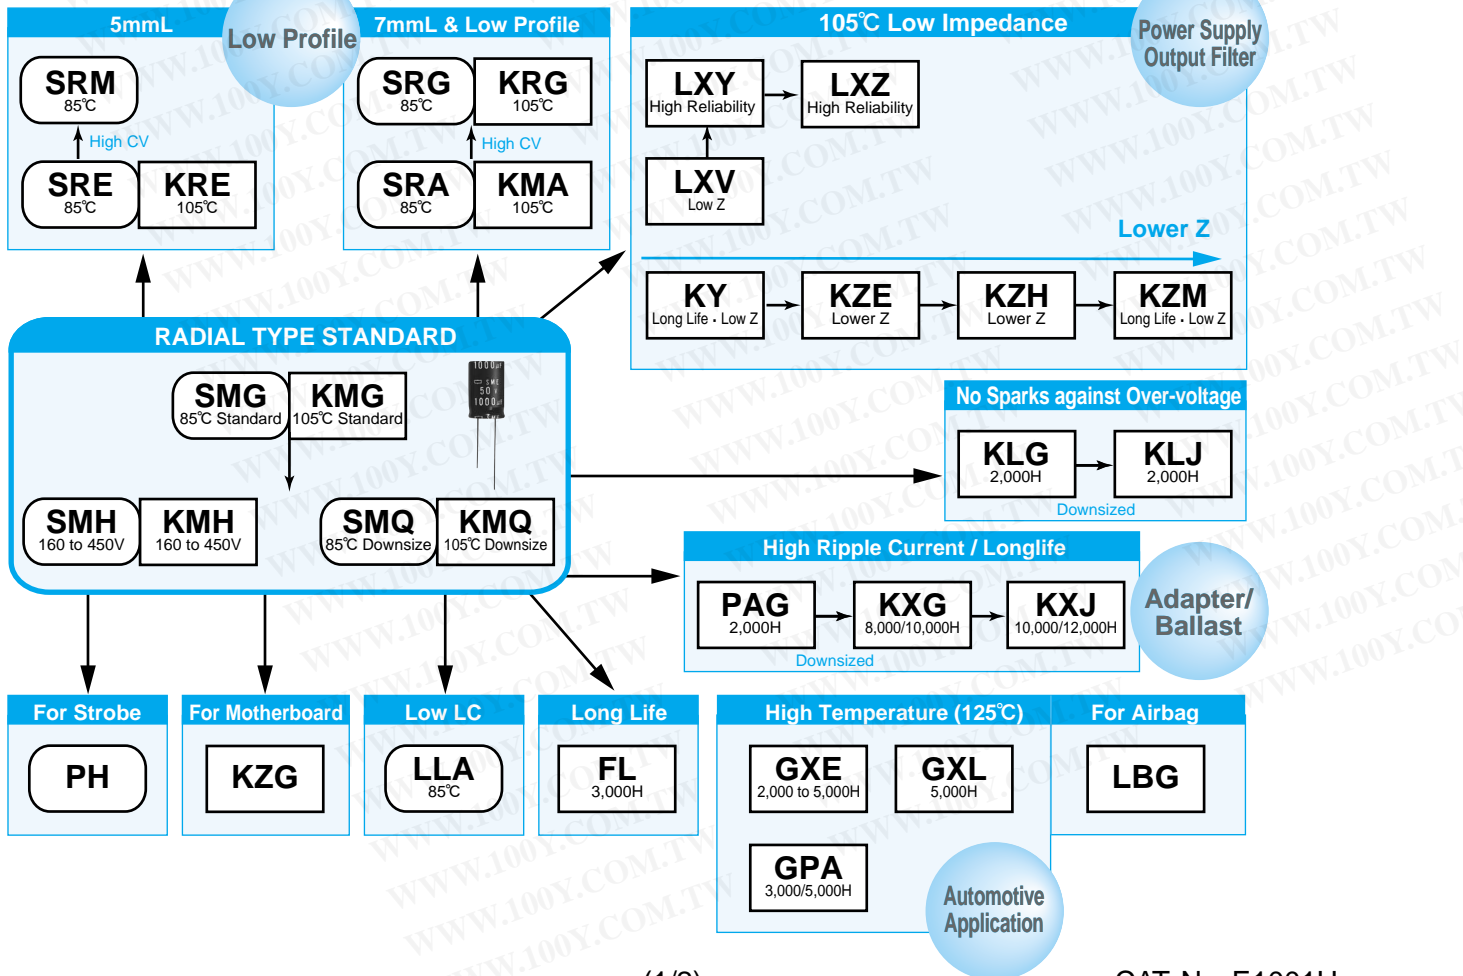


ALUMINUM ELECTROLYTIC CAPACITORS

◆SNAP-IN

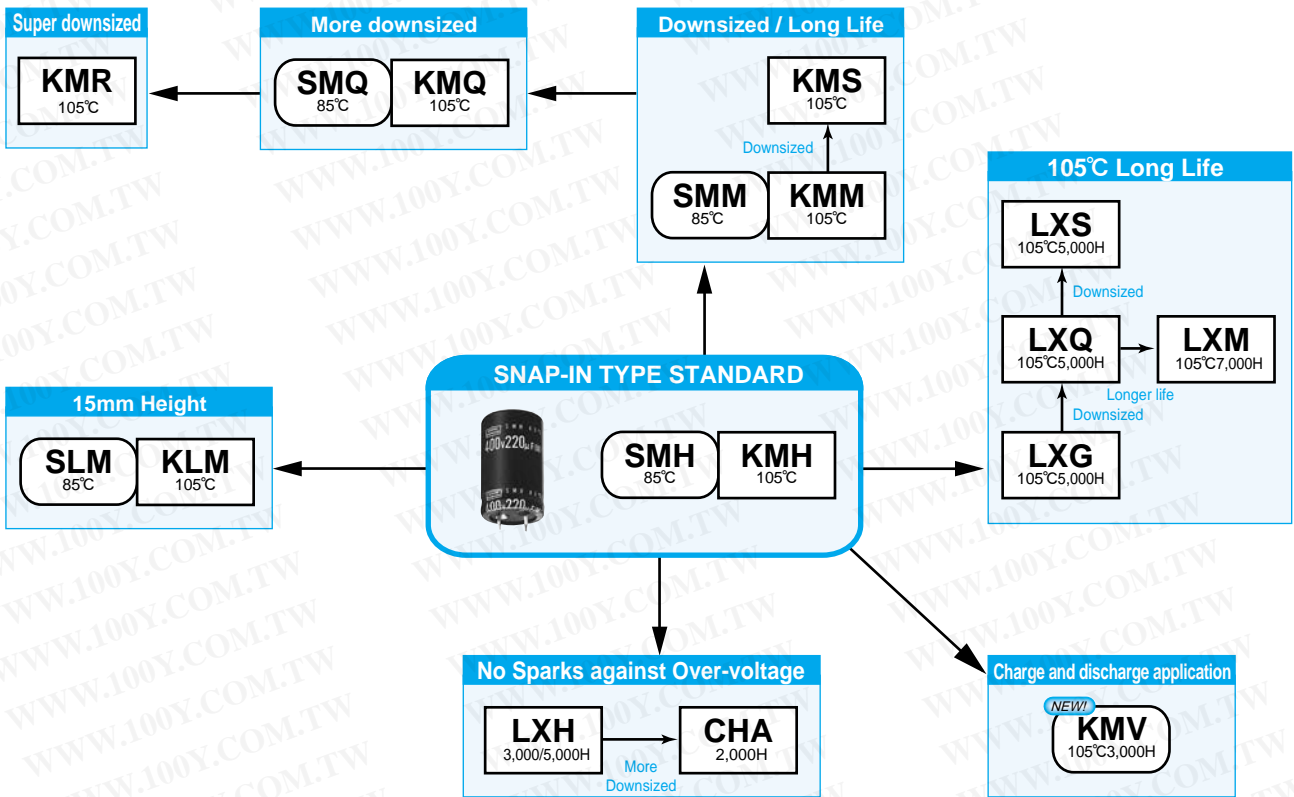

◆SCREW-MOUNT TERMINAL

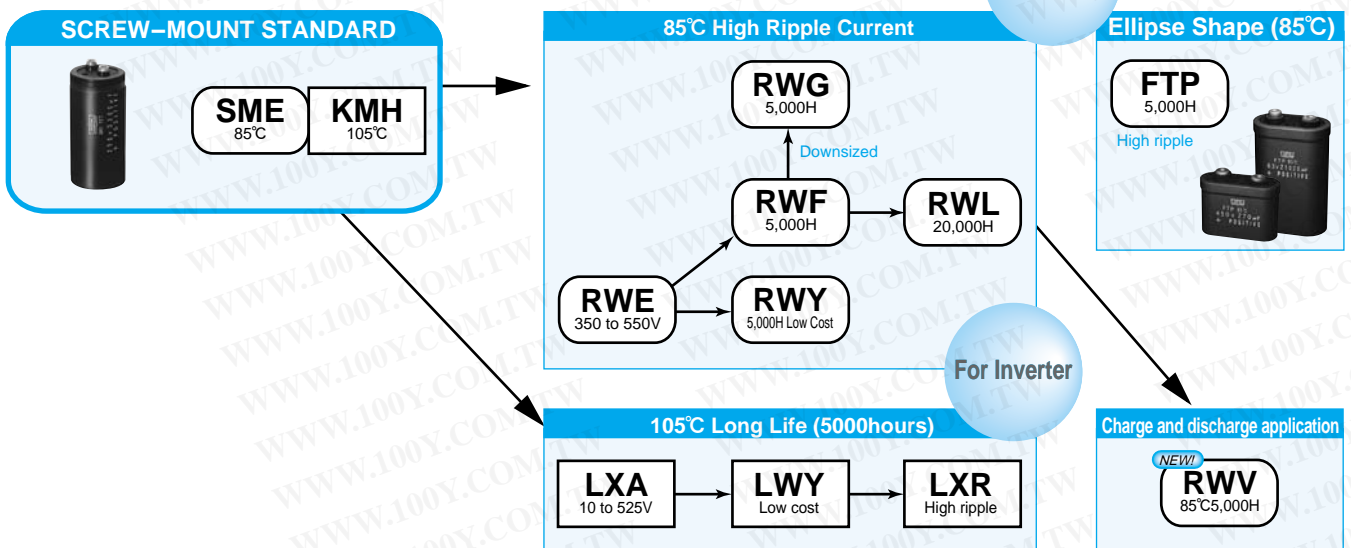

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

For conductive polymer aluminum electrolytic solid capacitors, please refer to PRECAUTIONS AND GUIDELINES (Conductive Polymer)

## Designing Device Circuits

**1** Select the capacitors to suit installation and operating conditions, and use the capacitors to meet the performance limits prescribed in this catalog or the product specifications.

### 2 Polarity

Aluminum Electrolytic Capacitors are polarized. Apply neither reverse voltage nor AC voltage to polarized capacitors. Using reversed polarity causes a short circuit or venting. Before use, refer to the catalog, product specifications or capacitor body to identify the polarity marking. (The shape of rubber seal does not represent the directional rule for polarity.) Use a bi-polar type of non-solid aluminum electrolytic capacitor for a circuit where the polarity is occasionally reversed. However, note that even a bi-polar aluminum electrolytic capacitor must not be used for AC voltage applications.

### 3 Operating voltage

Do not apply a DC voltage which exceeds the full rated voltage. The peak voltage of a superimposed AC voltage (ripple voltage) on the DC voltage must not exceed the full rated voltage. A surge voltage value, which exceeds the full rated voltage, is prescribed in the catalogs, but it is a restricted condition, for especially short periods of time.

### 4 Ripple current

The rated ripple current has been specified at a certain ripple frequency. The rated ripple current at several frequencies must be calculated by multiplying the rated ripple current at the original frequency using the frequency multipliers for each product series. For more details, refer to the paragraph on Aluminum Electrolytic Capacitor Life.

### 5 Category temperature

The use of a capacitor outside the maximum rated category temperature will considerably shorten the life or cause the capacitor to vent.

The relation between the lifetime of aluminum electrolytic capacitors and ambient temperature follows Arrhenius' rule that the lifetime is approximately halved with each 10°C rise in ambient temperature.

### 6 Life expectancy

Select the capacitors to meet the service life of a device.

### 7 Charge and discharge

Do not use capacitors in circuits where heavy charge and discharge cycles are frequently repeated. Frequent and sharp heavy discharging cycles will result in decreasing capacitance and damage to the capacitors due to generated heat. Specified capacitors can be designed to meet the requirements of charging-discharging cycles, frequency, operating temperature, etc.

### 8 Failure mode of capacitors

Non-solid aluminum electrolytic capacitors, in general, have a lifetime which ends in an open circuit, the period is dependent upon temperature. Consequently the lifetime of capacitors can be extended by reducing the ambient temperature and/or ripple current.

### 9 Insulating

a) Electrically isolate the following parts of a capacitor from the negative terminal, the positive terminal and the circuit traces.

- The outer can case of a non-solid aluminum capacitor.
- The dummy terminal of a non-solid aluminum capacitor, which is designed for mounting stability.

b) The outer sleeve of a capacitor is not assured as an insulator (Except for screw type). For applications that require an insulated outer sleeve, a custom-design capacitor is recommended.

### 10 Condition

Do not use/expose capacitors to the following conditions.

- a) Oil, water, salty water storage in damp locations.
- b) Direct sunlight
- c) Toxic gases such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine or its compounds, and ammonium
- d) Ozone, ultraviolet rays or radiation
- e) Severe vibration or mechanical shock conditions beyond the limits prescribed in the catalogs or the product specification.

### 11 Mounting

a) The paper separators and the electrolytic-conductive electrolytes in a non-solid aluminum electrolytic capacitor are flammable.

Leaking electrolyte on a printed circuit board can gradually erode the copper traces, possibly causing smoke or burning by short-circuiting the copper traces.

Verify the following points when designing a PC board.

- Provide the appropriate hole spacing on the PC board to match the terminal spacing of the capacitor.
- Make the following open space over the vent so that the vent can operate correctly.

Case diameter	Clearance
φ6.3 to φ16mm	2mm minimum
φ18 to φ35mm	3mm minimum
φ40mm and up	5mm minimum

- Do not place any wires or copper traces over the vent of the capacitor.
  - Installing a capacitor with the vent facing the PC board needs an appropriate ventilation hole in PC board.
  - Do not pass any copper traces beneath the seal side of a capacitor. The trace must pass 1 or 2mm to the side of the capacitor.
  - Avoid placing any heat-generating objects adjacent to a capacitor or even on the reverse side of the PC board.
  - Do not pass any via holes underneath a capacitor.
  - In designing double-sided PC boards, do not locate any copper trace under the seal side of a capacitor.
- b) Do not mount the terminal side of a screw mount capacitor downwards. If a screw terminal capacitor is mounted on its side, make sure the positive terminal is higher than the negative terminal.

Do not tighten the screws of the terminals and the mounting clamps over the specified torque prescribed in the catalog or the production specification.

c) For a surface mount capacitor, design the copper pads of the PC board in accordance with the catalog or the product specifications.

### 12 Others

- a) The electrical characteristics of capacitors vary in respect to temperature, frequency and service life. Design the device circuits by taking these changes into account.
- b) Capacitors mounted in parallel need the current to flow equally through the individual capacitors.
- c) Capacitors mounted in series require resistors in parallel with the individual capacitors to balance the voltage.
- d) Using capacitor for applications which always consider safety. Consult with our factory before use in applications which can affect human life.(space equipment, aerial equipment, nuclear equipment, medical equipment, vehicle control equipment, etc) Please note that the product, which is

designed only for specific usage can not be used in other usages.(ex. Photo flash type, etc.)

## Installing Capacitors

### 1 Installing

- a) Used capacitors are not reusable, except in the case that the capacitors are detached from a device for periodic inspection to measure their electrical characteristics.
  - b) If the capacitors have self charged, discharge in the capacitors through a resistor of approximately 1kΩ before use.
  - c) If capacitors are stored at a temperature of 35°C or more and more than 75%RH, the leakage current may increase. In this case, they can be reformed by applying the rated voltage through a resistor of approximately 1kΩ.
  - d) Verify the rated capacitance and voltages of the capacitors when installing.
  - e) Verify the polarity of the capacitors.
  - f) Do not use the capacitors if they have been dropped on the floor.
  - g) Do not deform the cases of capacitors.
  - h) Verify that the lead spacing of the capacitor fits the hole spacing in the PC board before installing the capacitors. Some standard pre-formed leads are available.
  - i) For pin terminals or snap-in terminals, insert the terminals into PC board and press the capacitor downward until the bottom of the capacitor body reaches PC board surface.
  - j) Do not apply any mechanical force in excess of the limits prescribed in the catalogs or the product specifications of the capacitors.
- Also, note the capacitors may be damaged by mechanical shocks caused by the vacuum/insertion head, component checker or centering operation of an automatic mounting or insertion machine.

### 2 Soldering and Solderability

- a) When soldering with a soldering iron
  - Soldering conditions (temperature and time) should be within the limits prescribed in the catalogs or the product specifications.
  - If the terminal spacing of a capacitor does not fit the terminal hole spacing of the PC board, reform the terminals in a manner to minimize a mechanical stress into the body of the capacitor.
  - Remove the capacitors from the PC board, after the solder is completely melted, reworking by using a soldering iron minimizes the mechanical stress to the capacitors.
  - Do not touch the capacitor body with the hot tip of the soldering iron.
- b) Flow soldering
  - Do not dip the body of a capacitor into the solder bath only dip the terminals in. The soldering must be done on the reverse side of PC board.
  - Soldering conditions (preheat, solder temperature and dipping time) should be within the limits prescribed in the catalogs or the product specifications.
  - Do not apply flux to any part of capacitors other than their terminals.
  - Make sure the capacitors do not come into contact with any other components while soldering.
- c) Reflow soldering
  - Soldering conditions (preheat, solder temperature and dipping time) should be within the limits prescribed in the catalogs or the product specifications.
  - When setting the temperature infrared heaters, consider that the infrared absorption causes material to be discolored and change in appearance.
  - Do not solder capacitors more than once using reflow. If you need to twice, be sure to consult with us.

- Make sure capacitors do not come into contact with copper traces.

- d) Do not re-use surface mount capacitors which have already been soldered.

In addition, when installing a new capacitor onto the assembly board to rework, remove old residual flux from the surface of the PC board, and then use a soldering iron within the prescribed conditions.

- e) Confirm before running into soldering that the capacitors are for reflow soldering.

### 3 Handling after soldering

Do not apply any mechanical stress to the capacitor after soldering onto the PC board.

- a) Do not lean or twist the body of the capacitor after soldering the capacitors onto the PC board.
- b) Do not use the capacitors for lifting or carrying the assembly board.
- c) Do not hit or poke the capacitor after soldering to PC board. When stacking the assembly board, be careful that other components do not touch the aluminum electrolytic capacitors.
- d) Do not drop the assembly board.

### 4 Cleaning PC boards

- a) Do not wash capacitors by using the following cleaning agents.
  - Halogenated solvents; cause capacitors to fail due to corrosion.
  - Alkali system solvents; corrode (dissolve) an aluminum case.
  - Petroleum and terpene system solvents; cause the rubber seal material to deteriorate.
  - Xylene; causes the rubber seal material to deteriorate.
  - Acetone; erases the marking.

Solvent resistant capacitors are only suitable for washing using the cleaning conditions prescribed in the catalogs or the product specifications. In particular, ultrasonic cleaning will accelerate damaging capacitors.
- b) Verify the following points when washing capacitors.
  - Monitor conductivity, pH, specific gravity, and the water content of cleaning agents. Contamination adversely affects these characteristics.
  - Be sure not to expose the capacitors under solvent rich conditions or keep capacitors inside a closed container. In addition, please dry the solvent sufficiently on the PC board and the capacitor with an air knife (temperature should be less than the maximum rated category temperature of the capacitor) over 10 minutes. Aluminum electrolytic capacitors can be characteristically and catastrophically damaged by halogen ions, particularly by chlorine ions, though the degree of the damage mainly depends upon the characteristics of the electrolyte and rubber seal material. When halogen ions come into contact with the capacitors, the foil corrodes when voltages applied. This corrosion causes ; extremely high leakage current, which causes in line with, venting, and an open circuit.

Global environmental warnings (Greenhouse effects and other environmental destruction by depletion of the ozone layer), new types of cleaning agents have been developed and commercialized as substitutes for CFC-113,1,1,2-trichloroethylene and 1,1,1-trichloroethylene. The following are recommended as cleaning conditions for some of new cleaning agents.

#### –Higher alcohol system cleaning agents

Recommended cleaning agents:

Pine Alpha ST-100S (Arakawa Chemical)

Clean Through 750H, 750K, 750L, and 710M (Kao)

Technocare FRW-14,15,16,17 (Momentive performance materials)

Cleaning conditions:



## PRECAUTIONS AND GUIDELINES

Using these cleaning agents capacitors are capable of withstanding immersion or ultrasonic cleaning for 10 minutes at a maximum liquid temperature of 60°C. Find optimum condition for washing, rinsing, and drying. Be sure not to rub the marking off the capacitor by contacting any other components or the PC board. Note that shower cleaning adversely affects the markings on the sleeve.

### -Non-Halogenated Solvent Cleaning

AK225AES (Asahi Glass)

Cleaning conditions:

Solvent resistant capacitors are capable of withstanding any one of immersion, ultrasonic or vapor cleaning for 5 minutes; exception is 2 minutes max. for KRE, and KRE-BP series capacitors and 3 minutes for SRM series capacitors. However, from a view of the global environmental problems, these types of solvent will be banned in near future. We would recommend not using them as much as possible.

### Isopropyl alcohol cleaning agents

IPA (Isopropyl Alcohol) is one of the most acceptable cleaning agents; it is necessary to maintain a flux content in the cleaning liquid at a maximum limit of 2 Wt.%.

## 5 Precautions for using adhesives and coating materials

- Do not use any adhesive and coating materials containing halogenated solvent.
- Verify the following before using adhesive and coating material.
  - Remove flux and dust leftover between the rubber seal and the PC board before applying adhesive or coating materials to the capacitor.
  - Dry and remove any residual cleaning agents before applying adhesive and coating materials to the capacitors. Do not cover over the whole surface of the rubber seal with the adhesive or coating materials.
  - For permissible heat conditions for curing adhesives or coating materials, follow the instructions in the catalogs or the product specifications of the capacitors.
  - Covering over the whole surface of the capacitor rubber seal with resin may result in a hazardous condition because the inside pressure cannot release completely. Also, a large amount of halogen ions in resins will cause the capacitors to fail because the halogen ions penetrate into the rubber seal and the inside of the capacitor.
- Some of coating material cannot be cured over the capacitor. Please note that loose luster and whitening on the surface of the outer sleeve might be caused according to the kind of solvents used for mounting adhesives and coating agents.

## 6 Fumigation

In many cases when exporting or importing electronic devices, such as capacitors, wooden packaging is used. In order to control insects, many times, it becomes necessary to fumigate the shipments. Precautions during "Fumigation" using halogenated chemical such as Methyl Bromide must be taken. Halogen gas can penetrate packaging materials used, such as, cardboard boxes and vinyl bags. Penetration of the halogenide gas can cause corrosion of Electrolytic capacitors.

## The Operation of Devices

- Do not touch a capacitor directly with bare hands.
- Do not short-circuit the terminal of a capacitor by letting it come into contact with any conductive object.  
Also, do not spill electric-conductive liquid such as acid or alkaline solution over the capacitor.
- Do not use capacitors in circumstance where they would be subject to exposure to the following materials exist or expose.
  - Oil, water, salty water or damp location.
  - Direct sunlight.

- Toxic gases such as hydrogen sulfide, sulfurous acid, nitrous acid, chlorine or its compounds, and ammonium.
- Ozone, ultraviolet rays or radiation.
- Severe vibration or mechanical shock conditions beyond the limits prescribed in the catalogs or product specification.

## Maintenance Inspection

- Make periodic inspections of capacitors that have been used in industrial applications. Before inspection, turn off the power supply and carefully discharge the electricity in the capacitors. Verify the polarity when measuring the capacitors with a volt-ohm meter. Also, do not apply any mechanical stress to the terminals of the capacitors.
- The following items should be checked during the periodic inspections.
  - Significant damage in appearance : venting and electrolyte leakage.
  - Electrical characteristics: leakage current, capacitance,  $\tan\delta$  and other characteristics prescribed in the catalogs or product specifications.We recommend replacing the capacitors if the parts are out of specification.

## In Case of Venting

- If a non-solid aluminum electrolytic capacitor expels gas when venting, it will discharge odors or smoke, or burn in the case of a short-circuit failure. Immediately turn off or unplug the main power supply of the device.
- When venting, a non-solid aluminum electrolytic capacitor blows out gas with a temperature of over 100°C. (A solid aluminum electrolytic capacitor discharges decomposition gas or burning gas while the outer resin case is burning.) Never expose the face close to a venting capacitor. If your eyes should inadvertently become exposed to the spouting gas or you inhale it, immediately flush the open eyes with large amounts of water and gargle with water respectively. If electrolyte is on the skin, wash the electrolyte away from the skin with soap and plenty of water. Do not lick the electrolyte of non-solid aluminum electrolytic capacitors.

## Storage

We recommend the following conditions for storage.

- Do not store capacitors at a high temperature or in high humidity. Store the capacitors indoors at a temperature of 5 to 35°C and a humidity of less than 75%RH.
- Store the capacitors in places free from water, oil or salt water.
- Store the capacitors in places free from toxic gasses (hydrogen sulfide, sulfurous acid, chlorine, ammonium, etc.)
- Store the capacitors in places free from ozone, ultraviolet rays or radiation.
- Keep capacitors in the original package.
- It is not applied to a regulation of JEDEC J-STD-020(Rev.C).

## Disposal

Please consult with a local industrial waste disposal specialist when disposing of aluminum electrolytic capacitors.

## Catalogs


Specifications in catalogs may be subject to change without notice. For more details of precautions and guidelines for aluminum electrolytic capacitors, please refer to Engineering Bulletin No. 634A.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



## Structure of Aluminum Electrolytic Capacitors

The aluminum electrolytic capacitor contains an internal element of an anode foil, a cathode foil and paper separator rolled together, impregnated with an electrolyte, then attached to external terminals connecting the tabs with the anode or the cathode foils, and sealed in a can case.

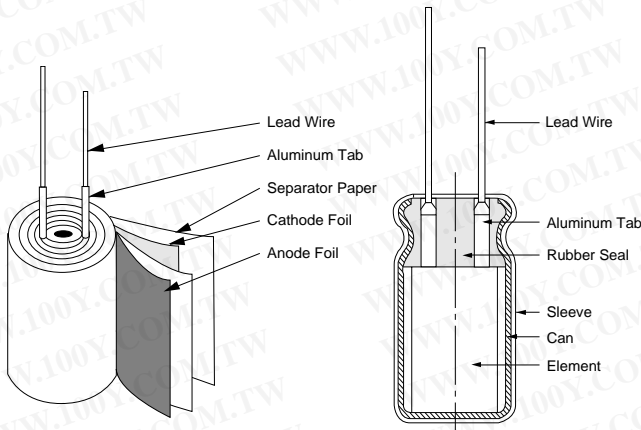

Among various types of capacitors, an aluminum electrolytic capacitor offers large CV to volume and features low cost. The capacitance (C) of aluminum electrolytic capacitors, as well as other capacitors, is expressed by the following equation:

$$C = 8.854 \times 10^{-12} \times \frac{\epsilon S}{d} \text{ (F)}$$

Where :  $\epsilon$ =Dielectric constant  
S=Surface area of dielectric (m<sup>2</sup>)  
d=Thickness of dielectric (m)

This equation shows that the capacitance increases in proportion as the dielectric constant becomes high, its surface area becomes large and the thickness of dielectric becomes thin. In aluminum electrolytic capacitors the dielectric constant of an aluminum oxide (Al<sub>2</sub>O<sub>3</sub>) layer is 8 to 10, which is not as high as compared with the other types of capacitors. However, the dielectric layer of the aluminum oxide is extremely thin (about 15Å per volt) and the surface area is very large. An electrochemical formed electrode foil makes the dielectric on the etched surface of aluminum electrode foil. Electrochemical etching creates 20 to 100 times more surface area as plain foil. Therefore, an aluminum electrolytic capacitor can offer a large capacitance compared with other types.

## Primary of Composition Material

### Anode aluminum foil:

First, the etching process is carried out electromechanically with a chloride solution which dissolves metal and increases the surface area of the foil; forming a dense network like innumerable microscopic channels. Secondly, the formation process is carried out with a solution such as ammonium borate which forms the aluminum oxide layer (Al<sub>2</sub>O<sub>3</sub>) as a dielectric at a thickness of about 1.1 to 1.5nm / volt. The process needs to charge more the rated voltage into the foil.

### Cathode aluminum foil:

As in the first manufacturing process of the positive foil, the cathode foil requires etching process. Generally, it does not require the formation process; therefore, the natural oxide layer of Al<sub>2</sub>O<sub>3</sub>, which gives a characteristic dielectric voltage of 1.0 volts, is formed.

### Electrolyte and separator:

In a non-solid aluminum electrolytic capacitor, the electrolyte, an electrically conductive liquid, functions as a true cathode by contacting the dielectric oxide layer. Accordingly, the "cathode foil" serves as an electrical connection between the electrolyte and terminal.


The separator functions to retain the electrolyte and prevent the anode and cathode foils from short-circuiting.

### Can case and sealing materials:

The foils and separator are wound into a cylinder to make an internal element, which is impregnated with the electrolyte, inserted into an aluminum can case and sealed. During the service life of a capacitor, electrolyte slowly and naturally vaporizes by electrochemical reaction on the boundary of the aluminum foils. The gas will increase the pressure inside the case and finally cause the pressure relief vent to open or the sealing materials to bulge. The sealing material functions not only to prevent electrolyte from drying out but also to allow the gas to escape out of the can case in a controlled manner.


## The Equivalent Circuit

As the equivalent circuit of an aluminum electrolytic capacitor is shown below, it forms a capacitance, a series resistance, an inductance, and a parallel resistance.

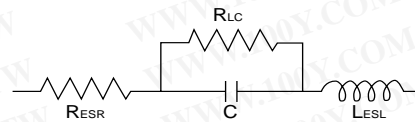

RESR=Equivalent series resistance (ESR)  
RLC =Resistance due to leakage current  
C =Capacitance  
LESL =Equivalent series inductance

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

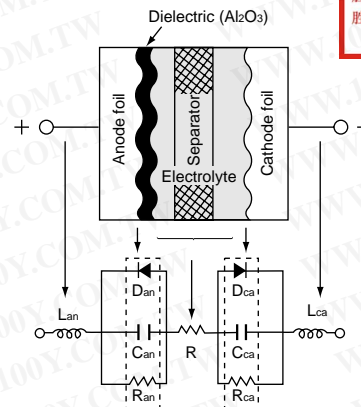

From a composition material point wise, the equivalent circuit is subdivided as follows.


Can, Cca=Capacitance due to anode and cathodes foils  
R =Resistance of electrolyte and separator  
Ran, Rca=Internal resistance of oxide layer on anode and cathode foils  
Dan, Dca=Diode effects due to oxide layer on anode and cathode foils  
Lan, Lca =Inductance due to anode and cathode terminals

## Basic Electrical Characteristics



### Capacitance:

The capacitance of capacitor is expressed as AC capacitance


by measuring impedance and separating factors. Also, the AC capacitance depends upon frequency, voltage and other measuring methods. In fact, JIS C 5101 prescribes that the series capacitive factor of an equivalent series circuit shall be the capacitance measured at a frequency of 120Hz and applying a maximum AC voltage of 0.5V rms with a DC bias voltage of 1.5 or 2.0V to aluminum electrolytic capacitors. The capacitance of an aluminum electrolytic capacitor becomes smaller with increasing frequency. See the typical behavior shown below.

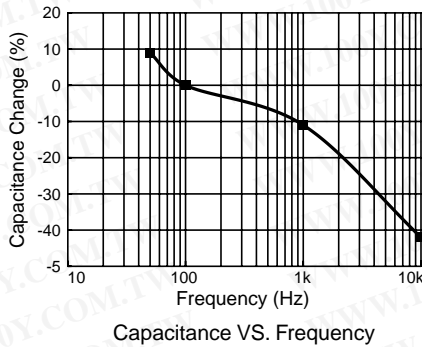

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
Http://www.100y.com.tw

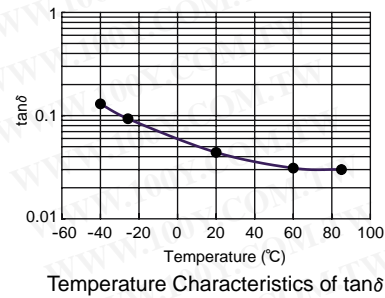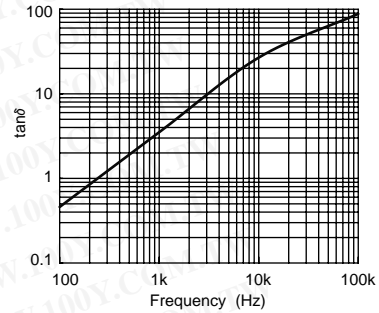

The capacitance value is highly dependent upon temperature and frequency. As the temperature decreases, the capacitance becomes smaller. See the typical behavior shown below.

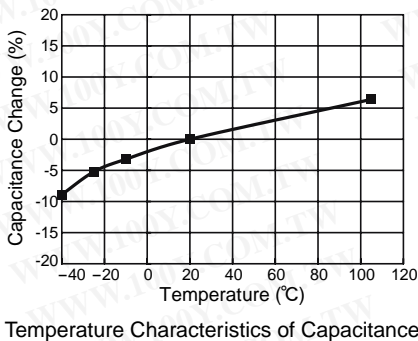

**Equivalent series resistance (ESR):**

The ESR is the series resistance consisting of the aluminum oxide layer, electrolyte/separator combination, and other resistance related factors, foil length, foil surface area and others. The ESR value depends upon the temperature. Decreasing the temperature makes the resistivity of the electrolyte increase and leads to increasing ESR. As the measuring frequency increases, the ESR decreases and reaches an almost constant value that mainly dominates the frequency-independent resistance relating electrolyte/separator combination.


**Impedance (Z):**

The impedance is the resistance of the alternating current at a specific frequency. It is related to capacitance (C) and inductance (L) in terms of capacitive and inductive reactance, and also related to the ESR. It is expressed as follows:

$$Z = \sqrt{ESR^2 + (X_L - X_C)^2}$$

Where:  $X_C = 1/\omega C = 1/2\pi f C$   
 $X_L = \omega L = 2\pi f L$


As shown below, the capacitive reactance (Xc) dominates at the range of low frequencies, and the impedance decreases with increasing frequency until it reaches the ESR in the middle frequency range. At the range of the higher frequencies the inductive reactance (XL) comes to dominate, so that the impedance increases when increasing the measuring frequency.

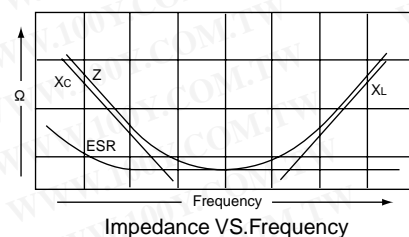

On the other hand, DC capacitance, which can be measured by applying a DC voltage, shows a slightly larger value than the AC capacitance at a normal temperature and has the flatter characteristic over the temperature range.


**tanδ(tangent of loss angle or dissipation factor):**

The tanδ is expressed as the ratio of the resistive component (RESR) to the capacitive reactance (1/ωC) in the equivalent series circuit. Its measuring conditions are the same as the capacitance.




$$\tan\delta = RESR / (1/\omega C) = \omega C RESR$$

Where:  $RESR = ESR$  at 120Hz  
 $\omega = 2\pi f$   
 $f = 120\text{Hz}$



The tanδ shows higher values as the measured frequency increases and the measured temperature decreases.


As shown at the next page, the impedance value varies with temperature because the resistance of the electrolyte is strongly affected by temperature.

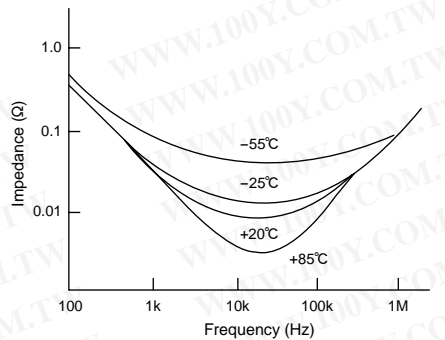

Temperature Characteristics of Impedance

**Leakage current:**


The dielectric of a capacitor has a very high resistance that does not allow DC current to flow. However, due to the characteristics of the aluminum oxide layer that functions as a dielectric in contact with electrolyte, a small amount of current, called leakage current, will flow to reform and repair the oxide layer when a voltage is being applied. As shown below, a high leakage current flows to charge voltage to the capacitor for the first seconds, and then the leakage current will decrease and reach an almost steady-state value with time.



Leakage Current VS. Time

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
Http://www.100y.com.tw

Measuring temperature and voltage influences the leakage current. The leakage current shows higher values as the temperature and voltage increase.

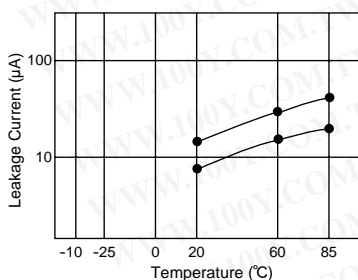


Typical Temperature Characteristics

In general, the leakage current is measured at 20°C by applying the rated voltage to capacitor through a resistor of 1000Ω in series. The leakage current is the value several minutes later after the capacitor has reached the rated voltage. The catalog prescribes the measuring temperature and time.

**Reliability**

**The bathtub curve:**

Aluminum electrolytic capacitors feature failure rates shown by the following bathtub curve.

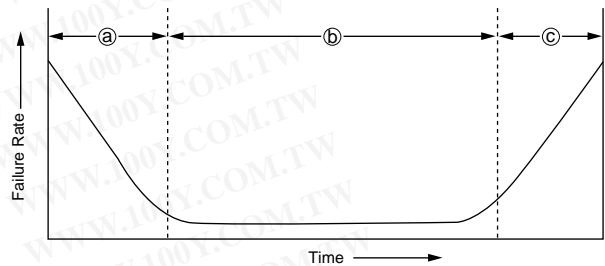

a) Infant failure period

This initial period accounts for the failures caused by deficiencies in design, structure, the manufacturing process or severe misapplications. In other words the initial failures occur as soon as the components are installed in a circuit. In the case of aluminum electrolytic capacitors, these failures do not occur at customers' field because aging process reforms an incomplete oxide layer, or eliminate the defective parts at the aging process and the sorting process. Misapplication of the capacitor such as inappropriate ambient conditions, over-voltage, reverse voltage, or excessive ripple current should be avoided for proper use of the capacitor in a circuit.

b) Useful life period

This random failure period exhibits an extremely low failure rate. These failures are not related to operating time but to application conditions. During this period, non-solid aluminum electrolytic capacitors lose a small amount of electrolyte. The electrolyte loss shows as a slow decrease in capacitance and a slow increase in tanδ and ESR. Non-solid aluminum electrolytic capacitors still exhibit lower catastrophic failures than semiconductors and solid tantalum capacitors.

c) Wear-out failure period

This period reflects a deterioration in the component properties of the capacitor ; the failure rate increases with time. Non-solid aluminum electrolytic capacitors end their useful life during this period.

**Failure types:**

The two types of failures are classified as catastrophic failures and wear-out failures as follows.

1) Catastrophic failures

This is a failure mode that destroys the function of the capacitor like a short circuit or open circuit failure.

2) Wear-out failures

This is a failure mode where gradually deteriorates; the electrical parameters of the capacitor. The criteria of judging the failures, vary with application and design factors. Capacitance decreases and tanδ increases are caused by the loss of electrolyte in the wear-out failure period. This is primary due to loss of electrolyte by diffusion (as vapor) through the sealing material. Gas molecules can diffuse out through the material of the end seal. High temperature increase the electrolyte vapor pressure within the capacitor and the diffusion rate is therefore increased. This increases internal pressure may cause the seal to bulge caused by elevated temperatures. This bulging may accelerate diffusion and mechanically degrade the seal. Factors that can increase the capacitor temperature, such as ambient temperature and ripple current, can accelerate the wear-out phase of a capacitor.

**Failure modes:**

Aluminum electrolytic capacitors show various failure modes in different applications. (See Table 1.)

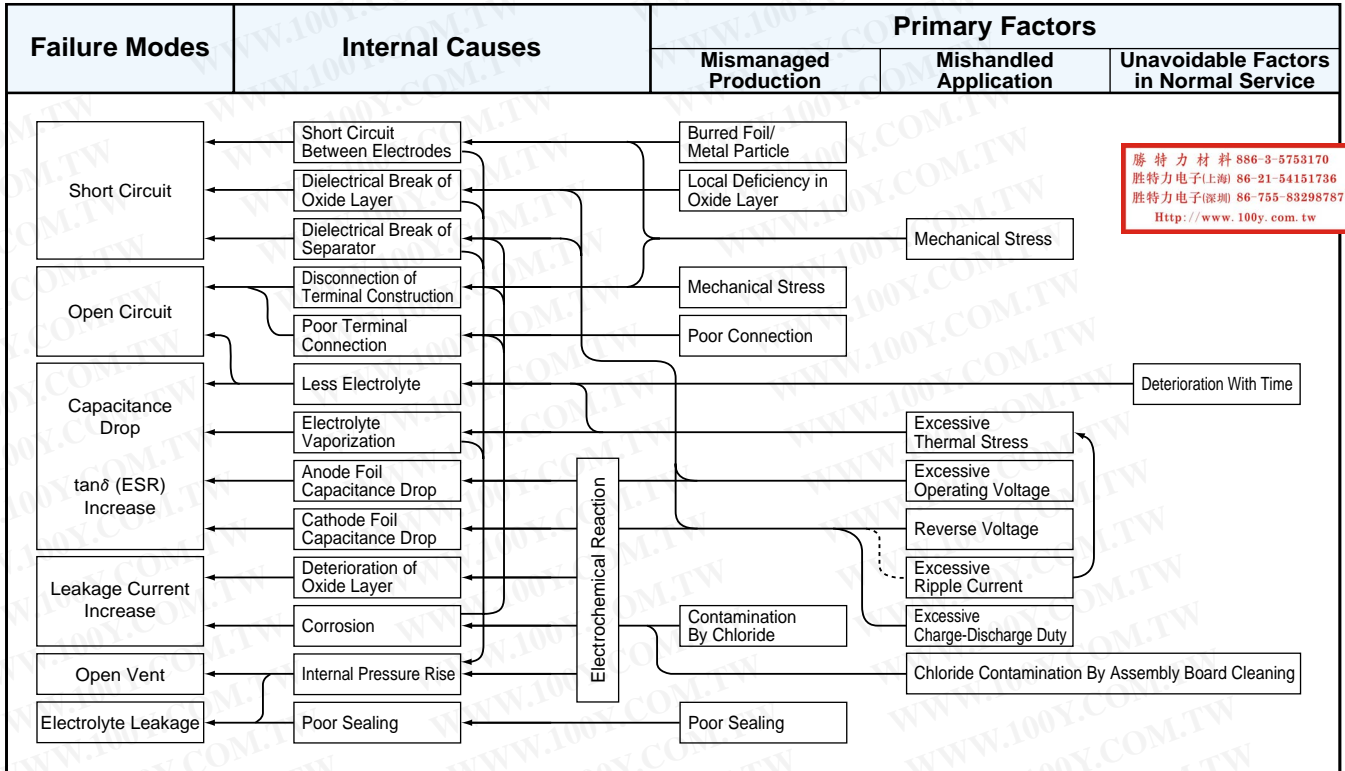


Table 1

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**Life of Aluminum Electrolytic Capacitors**

The life of aluminum electrolytic capacitors is largely dependent on environmental and electrical factors. Environmental factors include temperature, humidity, atmospheric pressure and vibration. Electrical factors include operating voltage, ripple current and charge-discharge duty cycles. The factor of temperature (ambient temperature and internal heating due to ripple current) is the most critical to the life of aluminum electrolytic capacitors.

**General formula to estimate lifetime:**

The lifetime of non-solid aluminum electrolytic capacitors is generally expressed by using three elements representing the effects of ambient temperature, applying voltage and ripple current, which is shown by the following equation:

$$L_x = L_o \cdot K_{Temp} \cdot K_{Voltage} \cdot K_{Ripple}$$

- Where :  $L_x$  =Lifetime of capacitor to be estimated
- $L_o$  =Base lifetime of capacitor
- $K_{Temp}$  =Ambient temperature accelation term
- $K_{Voltage}$  =Voltage accelation term
- $K_{Ripple}$  =Ripple current accelation term

**$K_{Temp}$  (Effects of ambient temperature on life):**

Because an aluminum electrolytic capacitor is essentially an electrochemical component, increased temperatures accelerate the chemical reaction producing gas within the capacitor which is diffused through the end seal, and consequently accelerates a gradual decrease in capacitance and a gradual increase in tanδ and ESR. The following equation has been experimentally found to express the relationship between the temperature accelation factor and the deterioration of the capacitor.

$$L_x = L_o \cdot K_{Temp} = L_o \cdot B^{(T_o - T_x) / 10}$$

$$K_{Temp} = B^{(T_o - T_x) / 10}$$

- Where :  $L_x$  =Lifetime (hour) of capacitor to be estimated
- $L_o$  =Base lifetime (hour) of capacitor
- $T_o$  =Maximum rated category temperature (°C) of capacitor shown in catalog
- $T_x$  =Actual ambient temperature (°C) of capacitor
- $B$  =Temperature accelation factor (≈2)

This equation is similar to Arrhenius' equation that expresses a relationship between chemical reaction rates and temperature, and called Arrhenius' rule of aluminum electrolytic capacitors. The temperature accelation factor (B) is approximately 2 over an ambient temperature range ( $T_x$ ) from 40°C to the maximum rated category temperature of each capacitor. It means that the lifetime is approximately halved with every 10°C rise in ambient temperature and can be extended by using the capacitors at low temperatures. For an ambient temperature range ( $T_x$ ) of 20°C to 40°C, the factor B will be close to 2, and the lifetime will actually be extended. However, operating and surrounding conditions, especially the operating conditions influence ambient temperatures mutually. The ambient temperature in this range will be very changeable; therefore, lifetime estimation under 40°C should use 40 as  $T_x$ .

**$K_{Voltage}$  (Effects of applying voltage to life):**

Miniature and large sized aluminum electrolytic capacitors for popular applications, such as surface mount types, radial lead types, snap-in types and block types, have little voltage effect on their life. Other factors like temperature and ripple current determine the life in comparison with voltage, as long as the capacitors are used at voltages and temperatures within the specifications prescribed in the catalog. Consequently,  $K_{Voltage}=1$  is used for these capacitors. 350V and higher screw-mount terminal types of capacitors for customer-use power electronics applications allow the life time to extend by applying low voltage, relating to the characteristics of their aluminum oxide layer. KMH, RWG, RWF, RWE, RWY, RWL and LXA series are applicable to the method. For  $K_{Voltage}$  values of these products, please contact a representative of Nippon Chemi-Con.

**$K_{Ripple}$  (Effects of ripple current to life):**

Aluminum electrolytic capacitors have higher tanδ than any other types of capacitors; therefore, the ripple current gives aluminum electrolytic capacitors higher internal heat. Be sure to check the rated ripple current which is specified in the catalog for assuring the life.



# PRECAUTIONS AND GUIDELINES

The ripple current through the capacitor produces heat by dissipating power from the capacitor. This leads to temperature increase. Internal heating produced by ripple currents can be expressed by:

$$W=(I_{\text{Ripple}})^2 \cdot R_{\text{ESR}} + V \cdot I_{\text{Leakage}}$$

Where :  $W$  =Internal power loss  
 $I_{\text{Ripple}}$  =R.M.S. ripple current  
 $R_{\text{ESR}}$  =Internal resistance (ESR) at ripple frequency  
 $V$  =Applied voltage  
 $I_{\text{Leakage}}$ =Leakage current

Leakage current may be 5 to 10 times higher than the values measured at 20°C, but compared with ripple, the leakage current value is very small and negligible. Thus, the above equation can be simplified:

$$W=(I_{\text{Ripple}})^2 \cdot R_{\text{ESR}}$$

The following equation gives the internal heat rise; it is heat rise to stable condition. ( It is necessary to input several factors.):

$$(I_{\text{Ripple}})^2 \cdot R_{\text{ESR}} = \beta \cdot A \cdot \Delta T$$

Where :  $\beta$  =Heat transfer constant  
 $A$  =Surface area of can case  
 $A=(\pi/4) \cdot D \cdot (D+4L)$   
 Where :  $D$ =Can diameter  
 $L$ =Can length

$\Delta T$ =An increase in core temperature by internal heating due to ripple current  
 ( $\Delta T$ =Core temperature–Ambient temperature)

From the above equation, internal temperature rise ( $\Delta T$ ) produced by ripple current is given by:

$$\Delta T=(I_{\text{Ripple}})^2 \cdot R_{\text{ESR}} / (\beta \cdot A)$$

When the ripple frequency is 120Hz,  $R_{\text{ESR}}$  at 120Hz is expressed by

$$R_{\text{ESR}}=\tan\delta / (\omega \cdot C)$$

$$\Delta T=(I_{\text{Ripple}})^2 \cdot \tan\delta / (\beta \cdot A \cdot \omega \cdot C)$$

Where :  $\tan\delta$ =120Hz value  
 $\omega =2\pi \cdot f=2\pi \cdot 120\text{Hz}$   
 $C$  =120Hz capacitance value

As above equation,  $\Delta T$  varies with frequency of ripple, frequency and temperature dependent ESR, and application dependent  $\beta$  (even ripple current is constant). We really recommend that customers measure  $\Delta T$  with a thermocouple at the actual operating conditions of the application in lieu of using the above equation. (Another approximation of  $\Delta T$  will be stated later.)

As mentioned in the paragraph of  $K_{\text{Temp}}$ , aluminum electrolytic capacitors will slowly increase in  $\tan\delta$  and ESR during their service life. The application without ripple current has no influence on the life of the capacitor even though the ESR will increase during life. In other words, the application with ripple current makes  $\Delta T$  increase; furthermore, a  $\Delta T$  increase results in ESR increase. The ESR increase then makes  $\Delta T$  increase. It is a chain reaction. Theoretically, the ripple current acceleration term ( $K_{\text{Ripple}}$ ) cannot be simply expressed like the ambient temperature acceleration term ( $K_{\text{Temp}}$ ). Practically, the ripple current acceleration term ( $K_{\text{Ripple}}$ ) can be approximately expressed by an equation using a  $\Delta T$  initially measured. The following table shows the ripple current acceleration term ( $K_{\text{Ripple}}$ ) for each capacitor design group.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

$K_{\text{Ripple}}$	Products				
	Type	Series			
$2^{(-\Delta T / 5)}$	Surface Mount	MVS	MVA	MV	MVE
		MVK	MKA	MZA	MVY
MZE		MZD	MLA	MVJ	
MLE		MLD	MVL	MVH	
	MHB	MKB	MV-BP	MVK-BP	
	Radial	SRM	SRE	KRE	SRA
		KMA	SRG	KRG	SMQ
		SMG	SME-BP	KME-BP	LLA
$2^{(\Delta T_{\text{to}} - \Delta T) / 5}$	Radial	KMQ	KMG	KZM	KZH
		KZE	KY	LXZ	LXY
		LXV	KXJ	KXG	KMH
		PAG	KLJ	KLG	FL
		GPA	GXE	GXL	LBG
	Snap-in	KMR	KMQ	KMS	KMM
		KMH	KLM	LXM	LXS
		LXQ	LXG	CHA	LXH
	Screw-Mount (Less than 350V <sub>dc</sub> )	KMH	LXA		
Radial	SMH				
	Snap-in	SMQ	SMM	SMH	SLM
		Screw-Mount	SME		
$2^{(-2+(25-\Delta T) / b)}$	Screw-Mount (350V <sub>dc</sub> and higher)	RWG	RWF	RWE	RWY
		RWL	LXA		

Note :  $\Delta T$  = An increase (deg) in core temperature produced by internal heating due to actual operating ripple current. The  $\Delta T$  is the difference between the core temperature and ambient temperature measured at the actual operating conditions.

$\Delta T_{\text{to}}$  = An increase (deg) in core temperature by internal heating due to rated ripple current.

$b$  = Factor  $b$  varies from 5 to 10 by the conditions of ripple frequency and  $\Delta T$ . Please contact a representative of Nippon Chemi-Con for the details

Note that a  $\Delta T$  over a certain maximum limit may over-heat the capacitors, though the lifetime estimation will not give you practical lifetime. For instance, the following shows a guide limit of  $\Delta T$  at each ambient temperature for 105°C maximum rated products.

Ambient temperature $T_x$ (°C)	85	105
Guide limit of $\Delta T$ (deg)	15	5
Core temperature (= $T_x + \Delta T$ )	100	110

## Approximation of $\Delta T$

Estimation of the lifetime requires two temperature measurements; first obtain  $\Delta T$  by actually measuring the core temperature, inserting the thermocouple inside the operating capacitor and secondary, the ambient temperature. A more convenient way to get the  $\Delta T$  is to convert the surface temperature of the capacitor case and the ambient temperature by using a coefficient specified for each case diameter as follows:

$$\Delta T = K_c \cdot (T_s - T_x)$$

Where :  $K_c$ =Coefficient from table below

$T_s$ =Surface temperature (deg) of capacitor can case

$T_x$ =Ambient temperature (deg)

No air flow conditions.

Diameter (mm)	φ5 to φ8	φ10	φ12.5	φ16	φ18	φ22	φ25	
$K_c$	1.10	1.15	1.20	1.25	1.30	1.35	1.40	
Diameter (mm)	φ30	φ35	φ40	φ50	φ63.5	φ76	φ89	φ100
$K_c$	1.50	1.65	1.75	1.90	2.20	2.50	2.80	3.10

Also, you can roughly estimate a  $\Delta T$  by using the following equation without need to measure.



# PRECAUTIONS AND GUIDELINES

$$\Delta T = \Delta T_0 \cdot (I_x / I_0)^2$$

Where :  $\Delta T_0 = 5$  deg for 105°C maximum rated capacitors.  
 $I_0$  = Rated ripple current (A<sub>RMS</sub>) : if its frequency is different from operating ripple current  $I_x$ , it needs converting by using a frequency multiplier prescribed in the catalog.  
 $I_x$  = Operating ripple current (A<sub>RMS</sub>) actually flowing into a capacitor

Like switching power supplies, if the operating ripple current consists of commercial frequency element and switching frequency element(s), an internal power loss is expressed by the following equation.

$$W = (I_{f1})^2 \cdot ESR_{f1} + (I_{f2})^2 \cdot ESR_{f2} + \dots + (I_{fn})^2 \cdot ESR_{fn}$$

Where :  $W$  = Internal power loss  
 $I_1 \dots I_n$  = Ripple currents at every frequencies  $f_1 \dots f_n$   
 $ESR_1 \dots ESR_n$  = ESR's at every frequencies  $f_1 \dots f_n$

The above equation can be transformed into another equation to get a ripple current value in accordance with the frequency of the rated ripple current, each of  $ESR_{f1} \dots ESR_{fn}$  is approximately equal to  $ESR_{f0}$  divided by square value of the frequency multiplier ( $F_{f1} \dots F_{fn}$ ). Here  $ESR_{f0}$  is the value at the frequency of the rated ripple current and  $F_{f1} \dots F_{fn}$  is a conversion coefficient from one frequency to another in accordance with the frequency  $f_1 \dots f_n$ .

$$\begin{aligned} ESR_{f1} &= ESR_{f0} / (F_{f1})^2 \\ &\vdots \\ ESR_{fn} &= ESR_{f0} / (F_{fn})^2 \end{aligned}$$

Relationship of  $w = (L_{Ripple})^2 \cdot R_{ESR}$  leads  $I_x$  as follows:

$$I_x = \sqrt{W / ESR_{f0}}$$


The above is rewritten in the following equation:

$$I_x = \sqrt{(I_{f1}/F_{f1})^2 + (I_{f2}/F_{f2})^2 + \dots + (I_{fn}/F_{fn})^2}$$

Where :  $I_x$  = Ripple current in accordance with the frequency of the rated ripple current  
 $I_1 \dots I_n$  = Operating ripple currents at every frequency  $f_1 \dots f_n$   
 $F_{f1} \dots F_{fn}$  = Frequency multipliers for every frequency  $f_1 \dots f_n$  prescribed in the catalog, based on the fact that the internal resistance of a capacitor varies with frequency.


## Cleaning Agents

- Cleaning agents penetrate into a capacitor.  
Solvent contacts the rubber seal of a capacitor. Some percentage of solvent does not penetrate but a percentage succeeds in entering and defusing inside the capacitor.
- Cleaning agents decompose and release halogen ions.  
In the electrolyte of the inside element, the halides in the cleaning agents become hydrolyzed and release halogen ions as follows,



### c. Corrosion

The halogen ions attack the aluminum foil by the following anodic half-cell reaction:



The  $AlX_3$  further becomes hydrolyzed and release the halogen ion again:



The halogen ions release by this hydrolysis reaction further attacks the aluminum according to the previous reaction formula, and these reactions are repeated and accelerated when voltage and temperature is applied. Also, the hydrogen ions increase the local acidity which causes the oxide dielectric to dissolve. Thus, localized corrosion accelerates to corrode both the aluminum metal and the dielectric. In addition, a terpene or petroleum system cleaning solvent will be absorbed into the rubber seal of the capacitor. The rubber seal finally weakens. An alkaline saponification detergent will damage the aluminum metal and marking. In summary, recommended cleaning agents are halogen free. Terpene, petroleum, alkali detergent and any solvent making the rubber seal material deteriorate are not recommended.

### Compatible cleaning agents:

In line with recent global environmental warnings (Greenhouse effect and other environmental destruction by depletion of the ozone layer), new types of cleaning agents have been commercialized and substituted as CFC-113, 1,1,2-trichloroethylene and 1,1,1-trichloroethylene. The following are recommended cleaning conditions for some of new cleaning agents.

#### Higher alcohol system cleaning agents

Recommended cleaning agents:

- Pine Alpha ST-100S (Arakawa Chemical)
  - Clean Through 750H, 750K, 750L, and 710M (Kao)
  - Technocare FRW-14 through 17 (GE Toshiba Silicones)
- Cleaning conditions:

- Capacitors are capable of withstanding immersion or ultrasonic cleaning for 10 minutes at a maximum liquid temperature of 60°C using the above cleaning agents. Find the optimum conditions for washing, rinsing, and drying. Be sure not to rub the marking off the capacitor by contact with any other components on the PC board. Note that shower cleaning adversely affects the marking.
- To rinse by water, control the conditions such as temperature and water pressure to avoid sleeve shrinking or swelling.
- Clean Through 750H and similar are weak-alkaline solvents. Do not leave the alkaline on the capacitor after cleaning process.

#### CFCs substitute solvents (HCFC system)

Asahi Glass AK225AES solvent is usable only with solvent resistant type capacitors, which are designed with reinforced seal constructions and modified electrolyte. This product does not penetrate the capacitor and deactivate halogen ions. However, AK225AES is one of the solvents which will have a restricted usage in future from the environmental point of view.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



## PRECAUTIONS AND GUIDELINES

### Non-Halogenated Solvent Cleaning

#### HCFC solvents: AK225AES (Asahi Glass)

##### Cleaning conditions:

Solvent resistant type capacitors are capable of withstanding immersion, ultrasonic or vapor cleaning for 5 minutes; exception is 2 minutes max. for KRE and KRE-BP series capacitors for 3 minutes and SRM series capacitors.

##### Applicable series (only for solvent resistant products):

Surface mount : PXF, PXE, PXH, MVS, MVA(4 to 63V<sub>dc</sub>), MV, MVE(6.3 to 63V<sub>dc</sub>), MVK, MKA, MZA, MVY(6.3 to 63V<sub>dc</sub>), MZE, MZD, MLA, MVJ, MLE, MLD, MVL, MVH(10 to 50V<sub>dc</sub>), MHB, MV-BP, MVK-BP

Radial lead : PSC, PSA, PS, SRM, KRE, KMA, SRG, KRG, KMQ(6.3 to 100V<sub>dc</sub>), SMG(6.3 to 250V<sub>dc</sub>), KMG(6.3 to 250V<sub>dc</sub>), SME-BP, KME-BP, LXZ, LXY, LXV, GPA, GXE(10 to 50V<sub>dc</sub>), GXL, LLA

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-54151736

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

#### Isopropyl alcohol cleaning agents

IPA (Isopropyl Alcohol) is one of the most acceptable cleaning agents; it is necessary to maintain a flux content in the cleaning liquid at a maximum limit of 2 Wt. %, because chlorides in flux dissolves in the cleaning liquid during the cleaning process.

Xylene -additive IPA may make the rubber seal deteriorate.

#### Non-clean flux

Both ionic halogen and non-ionic halogens damage the capacitor when they penetrate in through the rubber seal. Note that some of the fluxes called non-halogenated flux contains less ionic halogen activator but actually a large amount of non-ionic halogen.

Per our analysis, AHQ3100K(Asahi) and POZ6(Senjyu) minimize ionic and non-ionic halogens.

#### Other Precautions to wash capacitors

- Monitor conductivity, pH, specific gravity and water content of cleaning agents. Contamination adversely affects the characteristics.
- The solvent may stay between the end seal and the PC board if the capacitor is mounted directly onto the PCB without a small gap. The residual solvent can cause defects. Also, washing for more than the specified time causes solvent residual. Therefore, wash the assembly board for at least 10 minutes at the recommended temperature. Be sure not to expose the capacitors under solvent rich conditions or keep capacitors inside a closed container.
- Reforming the leads of the capacitor to fit lead spacing on the PC board causes cleaning agents to get into the inside capacitor. This may result in corrosion to the foil. Therefore, use the capacitors, which fit the hole spacing on the PC board or reform the lead wires in a manner which will not cause mechanical stress to the capacitor body.




# PART NUMBERING SYSTEM

## Product code guide (Surface mount type)

(Example : MVA series, 25V-47 $\mu$ F,  $\phi$ 6.3 $\times$ 5.2L)

Please refer to the following table

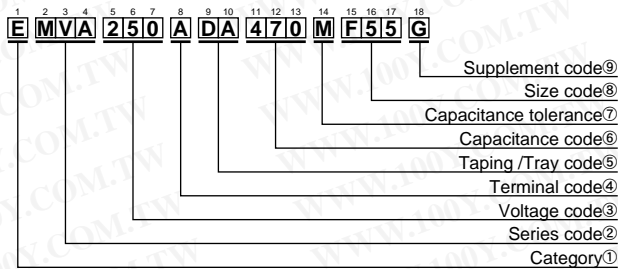

### ①Category

Contents	Code
	1st
Polar	E
Bi-polar	B

### ②Series code

Series name	Code		
	2nd	3rd	4th
MVA	M	V	A
MV	M	V	—
No series name	C	S	T

### ③Voltage code

Voltage (V)	Code		
	5th	6th	7th
4	4	R	0
6.3	6	R	3
10	1	0	0
16	1	6	0
25	2	5	0
35	3	5	0
50	5	0	0
63	6	3	0
80	8	0	0
100	1	0	1
160	1	6	1
200	2	0	1
250	2	5	1
400	4	0	1
450	4	5	1

### ④Terminal code

Type		Code
		8th
Vertical	No dummy terminal	A
	With dummy terminal	G
Horizontal	No dummy terminal	C
	With dummy terminal	D

### ⑤Taping / Tray code

Taping type	Reel dia. $\phi$ (mm)	Code		Application size $\phi$ D (mm)
		9th	10th	
Reel (Cardboard)	380	D	A	$\phi$ D=3 to 18 (not $\phi$ D=12.5)
Reel (Cardboard)	330	D	B	$\phi$ D=3 to 18
Reel (Plastic)	380	P	A	$\phi$ D=3 to 10
Reel for reuse	380	R	A	$\phi$ D=3 to 12.5

Package	Code		Application size $\phi$ D(mm)
	9th	10th	
Tray	T	R	$\phi$ D=12.5 to 18

Refer to product guide for taping and tray specifications.

### ⑥Capacitance code

Cap. ( $\mu$ F)	Code		
	11th	12th	13th
0.1	R	1	0
0.15	R	1	5
0.22	R	2	2
0.33	R	3	3
0.47	R	4	7
0.68	R	6	8
1.0	1	R	0
1.5	1	R	5
2.2	2	R	2
3.3	3	R	3
4.7	4	R	7
6.8	6	R	8
10	1	0	0
15	1	5	0
22	2	2	0
33	3	3	0
47	4	7	0
56	5	6	0
68	6	8	0
100	1	0	1
150	1	5	1
180	1	8	1
220	2	2	1
330	3	3	1
470	4	7	1
680	6	8	1
820	8	2	1
1,000	1	0	2
1,500	1	5	2
2,200	2	2	2
3,300	3	3	2
4,700	4	7	2
6,800	6	8	2
8,200	8	2	2
10,000	1	0	3

### ⑦Capacitance tolerance

Tol. (%)	Code
	14th
$\pm$ 20	M

### ⑧Size code (Vertical)

$\phi$ D (mm)	Code
	15th
3	B
4	D
5	E
6.3	F
8	H
10	J
12.5	K
16	L
18	M

L (mm)	Code	
	16th	17th
4.5	4	6
5.2	5	5
5.7	6	0
5.8	6	1
6.3	6	3
7.0	7	3
7.7	8	0
8.7	9	0
10	A	0
13.5	E	0
16	G	5
16.5	H	0
21.5	N	0

### ⑨Supplement code

Terminal plating material	Code
	18th
Sn-Bi	G
Sn100%	S


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

\* Refer to the appendix (Part number) for codes not listed here.



**Alchip™ - MVS Series**

- 4.5mm height
- Endurance : 2,000 hours at 85°C
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant




**◆ SPECIFICATIONS**

Items	Characteristics	
Category	-40 to +85°C	
Temperature Range		
Rated Voltage Range	4 to 50V <sub>dc</sub>	
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)	
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)	
Dissipation Factor (tanδ)	Rated voltage (V <sub>dc</sub> )	4V 6.3V 10V 16V 25V 35V 50V
	tanδ (Max.)	0.50 0.30 0.24 0.19 0.16 0.14 0.14 (at 20°C, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V <sub>dc</sub> )	4V 6.3V 10V 16V 25V 35V 50V
	Z(-25°C)/Z(+20°C)	7 4 3 2 2 2 2 (at 120Hz)
	Z(-40°C)/Z(+20°C)	15 8 8 4 4 3 3
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C.	
	Rated voltage	4 & 6.3V <sub>dc</sub> 10 to 50V <sub>dc</sub>
	Capacitance change	≤±30% of the initial value ≤±25% of the initial value
	DF (tanδ)	≤300% of the initial specified value ≤300% of the initial specified value
	Leakage current	≤The initial specified value ≤The initial specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.	
	Rated voltage	4 & 6.3V <sub>dc</sub> 10 to 50V <sub>dc</sub>
	Capacitance change	≤±30% of the initial value ≤±25% of the initial value
	DF (tanδ)	≤300% of the initial specified value ≤300% of the initial specified value
	Leakage current	≤The initial specified value ≤The initial specified value


**◆ DIMENSIONS [mm]**

● Terminal Code : A

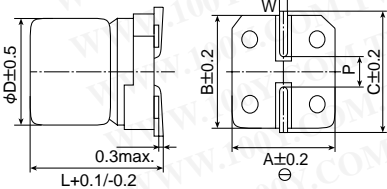


Size code	D	L	A	B	C	W	P
D46	4	4.5	4.3	4.3	5.1	0.5 to 0.8	1.0
E46	5	4.5	5.3	5.3	5.9	0.5 to 0.8	1.4
F46	6.3	4.5	6.6	6.6	7.2	0.5 to 0.8	1.9

**◆ PART NUMBERING SYSTEM**

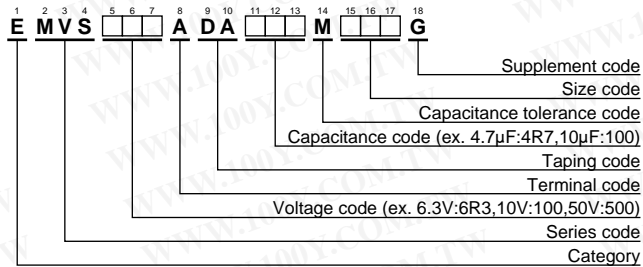

Please refer to "Product code guide (surface mount type)"

**◆ MARKING**



**◆ STANDARD RATINGS**

VV (V <sub>dc</sub> )	Cap (μF)	Size code	tanδ	Rated ripple current (mArms/85°C, 120Hz)	Part No.	VV (V <sub>dc</sub> )	Cap (μF)	Size code	tanδ	Rated ripple current (mArms/85°C, 120Hz)	Part No.
4	33	D46	0.50	28	EMVS4R0ADA330MD46G	35	4.7	D46	0.14	18	EMVS350ADA4R7MD46G
	47	D46	0.50	33	EMVS4R0ADA470MD46G		10	E46	0.14	29	EMVS350ADA100ME46G
	100	E46	0.50	56	EMVS4R0ADA101ME46G		22	F46	0.14	46	EMVS350ADA220MF46G
	220	F46	0.50	96	EMVS4R0ADA221MF46G		50	0.10	D46	0.14	1.0
6.3	22	D46	0.30	28	EMVS6R3ADA220MD46G	0.22		D46	0.14	2.0	EMVS500ADAR22MD46G
	47	E46	0.30	45	EMVS6R3ADA470ME46G	0.33		D46	0.14	2.8	EMVS500ADAR33MD46G
	100	F46	0.30	70	EMVS6R3ADA101MF46G	0.47		D46	0.14	4.0	EMVS500ADAR47MD46G
10	33	E46	0.24	41	EMVS100ADA330ME46G	1.0		D46	0.14	8.4	EMVS500ADA1R0MD46G
	10	D46	0.19	23	EMVS160ADA100MD46G	2.2		D46	0.14	13	EMVS500ADA2R2MD46G
16	22	E46	0.19	37	EMVS160ADA220ME46G	3.3		D46	0.14	17	EMVS500ADA3R3MD46G
	47	F46	0.19	58	EMVS160ADA470MF46G	4.7		E46	0.14	20	EMVS500ADA4R7ME46G
25	33	F46	0.16	52	EMVS250ADA330MF46G	10	F46	0.14	33	EMVS500ADA100MF46G	

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw

**Alchip™-MVA Series**

- φ4 through φ18 case sizes are fully lined up
- Endurance : 2,000 hours at 85°C
- Suitable to fit for downsized equipment
- Solvent resistant type except 100 to 450V<sub>dc</sub> (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant

**MVA**

↓  
Downsized  
Expanded case sizes  
↑  
MV




◆SPECIFICATIONS

Items	Characteristics												
Category	-40 to +85°C												
Temperature Range													
Rated Voltage Range	4 to 450V <sub>dc</sub>												
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)												
Leakage Current	Rated voltage (V <sub>dc</sub> )	4 to 100V						160 to 450V					
	D55 to JA0	I=0.01CV or 3μA, whichever is greater.(after 2 minutes)						-					
	KE0 to MNO	I=0.03CV or 4μA, whichever is greater.(after 1 minute)						I=0.04CV+100μA max.(after 1 minute)					
	Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C)												
Dissipation Factor (tanδ)	Rated voltage (V <sub>dc</sub> )	4V	6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 250V	400 & 450V	
	tanδ (Max.)	D55 to JA0	0.42	0.35	0.30	0.26	0.16	0.14	0.12	0.12	0.12	-	-
		KE0 to MNO	-	0.38	0.34	0.30	0.26	0.22	0.18	0.14	0.10	0.20	0.25
When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)													
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V <sub>dc</sub> )	4V	6.3V	10V	16V	25V	35V	50V	63V	100V	160 to 250V	400 & 450V	
	D55 to JA0	Z(-25°C)/Z(+20°C)	7	4	3	2	2	2	2	2	3	-	-
		Z(-40°C)/Z(+20°C)	17	10	8	6	4	3	3	3	4	-	-
	KE0 to MNO	Z(-25°C)/Z(+20°C)	-	5	4	3	2	2	2	2	2	3	6
Z(-40°C)/Z(+20°C)		-	12	10	8	5	4	3	3	3	6	10	
(at 120Hz)													
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C.												
	Size code	D55 to JA0			D55 to JA0			KE0 to MNO					
	Rated voltage (V <sub>dc</sub> )	4V & 6.3V			10 to 100V			6.3 to 450V					
	Capacitance change	≤±30% of the initial value			≤±20% of the initial value			≤±20% of the initial value					
	DF (tanδ)	≤200% of the initial specified value			≤200% of the initial specified value			≤200% of the initial specified value					
	Leakage current	≤The initial specified value			≤The initial specified value			≤The initial specified value					
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 85°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.												
	Size code	D55 to JA0			D55 to JA0			KE0 to MNO					
	Rated voltage	4V & 6.3V			10 to 100V			6.3 to 450V					
	Capacitance change	≤±30% of the initial value			≤±20% of the initial value			≤±20% of the initial value					
	DF (tanδ)	≤200% of the initial specified value			≤200% of the initial specified value			≤200% of the initial specified value					
	Leakage current	≤The initial specified value			≤The initial specified value			≤The initial specified value					

◆DIMENSIONS [mm]

- Terminal Code : A
- Size code : D55 to MNO
- Terminal Code : G
- Size code : LH0 to MNO

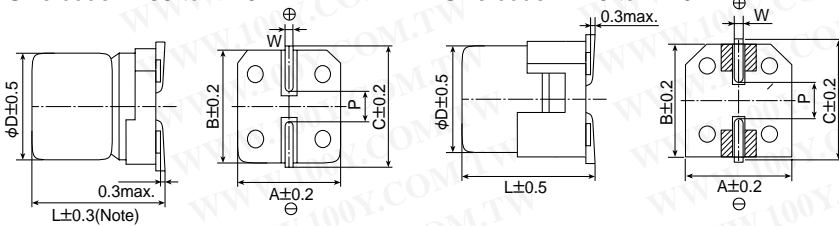


Note : L±0.5 for HA0 to MNO

▨ : Dummy terminals


Size code	D	L	A	B	C	W	P
D55	4	5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55	5	5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55	6.3	5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5
KE0	12.5	13.5	13.0	13.0	13.7	1.0 to 1.3	4.2
KG5	12.5	16.0	13.0	13.0	13.7	1.0 to 1.3	4.2
LH0	16	16.5	17.0	17.0	18.0	1.0 to 1.3	6.5
LN0	16	21.5	17.0	17.0	18.0	1.0 to 1.3	6.5
MH0	18	16.5	19.0	19.0	20.0	1.0 to 1.3	6.5
MNO	18	21.5	19.0	19.0	20.0	1.0 to 1.3	6.5

◆PART NUMBERING SYSTEM

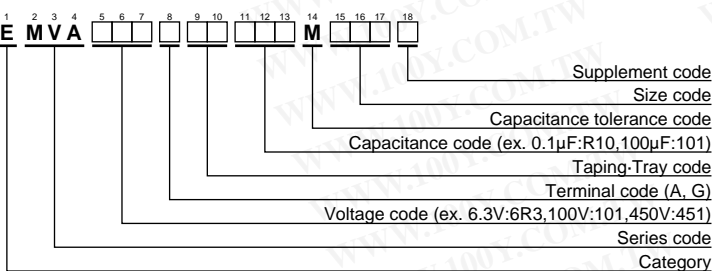

Please refer to "Product code guide (surface mount type)"

◆MARKING

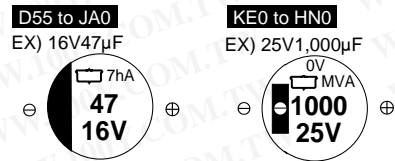

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-54151736**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)



# SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS

Downsized, 85°C

Alchip™-MVA Series

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw

## ◆STANDARD RATINGS


is not solvent resistant.

VV (Vdc)	Cap (µF)	Size code	tanδ	Rated ripple current (mA rms/85°C, 120Hz)	Part No.	VV (Vdc)	Cap (µF)	Size code	tanδ	Rated ripple current (mA rms/85°C, 120Hz)	Part No.
4	33	D55	0.42	25	EMVA4R0ADA330MD55G	35	150	HA0	0.14	210	EMVA350ADA151MHA0G
	47	D55	0.42	30	EMVA4R0ADA470MD55G		220	HA0	0.14	260	EMVA350ADA221MHA0G
	100	E55	0.42	50	EMVA4R0ADA101ME55G		330	JA0	0.14	360	EMVA350ADA331MJA0G
	220	F55	0.42	80	EMVA4R0ADA221MF55G		470	KE0	0.22	600	EMVA350ARA471MKE0S
	330	F80	0.42	135	EMVA4R0ADA331MF80G		1,000	LH0	0.22	1,100	EMVA350□DA102MLH0S
	470	F80	0.42	150	EMVA4R0ADA471MF80G		2,200	MN0	0.24	1,700	EMVA350□DA222MMN0S
6.3	1,000	HA0	0.42	320	EMVA4R0ADA102MHA0G	50	3.3	D55	0.12	15	EMVA500ADA3R3MD55G
	33	D55	0.35	30	EMVA6R3ADA330MD55G		4.7	D55	0.12	18	EMVA500ADA4R7MD55G
	47	D55	0.35	33	EMVA6R3ADA470MD55G		10	E55	0.12	30	EMVA500ADA100ME55G
	100	E55	0.35	55	EMVA6R3ADA101ME55G		22	F55	0.12	47	EMVA500ADA220MF55G
	220	F55	0.35	88	EMVA6R3ADA221MF55G		33	F80	0.12	70	EMVA500ADA330MF80G
	330	F80	0.35	135	EMVA6R3ADA331MF80G		47	F80	0.12	85	EMVA500ADA470MF80G
	470	HA0	0.35	280	EMVA6R3ADA471MHA0G		100	HA0	0.12	190	EMVA500ADA101MHA0G
	680	HA0	0.35	290	EMVA6R3ADA681MHA0G		220	JA0	0.12	320	EMVA500ADA221MJA0G
	820	HA0	0.35	320	EMVA6R3ADA821MHA0G		330	KE0	0.18	600	EMVA500ARA331MKE0S
	1,000	JA0	0.35	430	EMVA6R3ADA102MJA0G		470	KG5	0.18	740	EMVA500ARA471MKG5S
	1,500	JA0	0.35	480	EMVA6R3ADA152MJA0G		470	LH0	0.18	850	EMVA500□DA471MLH0S
	2,200	KE0	0.40	890	EMVA6R3ARA222MKE0S		1,000	LN0	0.18	1,300	EMVA500□DA102MLN0S
	3,300	KG5	0.42	1,000	EMVA6R3ARA332MKG5S		1,000	MN0	0.18	1,400	EMVA500□DA102MMN0S
	3,300	LH0	0.42	1,200	EMVA6R3□DA332MLH0S		0.10	D55	0.12	1.3	EMVA630ADAR10MD55G
	4,700	LH0	0.44	1,400	EMVA6R3□DA472MLH0S		0.22	D55	0.12	3.0	EMVA630ADAR22MD55G
6,800	LN0	0.48	1,750	EMVA6R3□DA682MLN0S	0.33	D55	0.12	4.0	EMVA630ADAR33MD55G		
6,800	MH0	0.48	1,700	EMVA6R3□DA682MMH0S	0.47	D55	0.12	5.0	EMVA630ADAR47MD55G		
10,000	MN0	0.56	2,000	EMVA6R3□DA103MMN0S	1.0	D55	0.12	8.0	EMVA630ADA1R0MD55G		
10	22	D55	0.30	26	EMVA100ADA220MD55G	63	2.2	D55	0.12	12	EMVA630ADA2R2MD55G
	33	D55	0.30	30	EMVA100ADA330MD55G		3.3	E55	0.12	17	EMVA630ADA3R3ME55G
	47	E55	0.30	44	EMVA100ADA470ME55G		4.7	E55	0.12	20	EMVA630ADA4R7ME55G
	100	F55	0.30	70	EMVA100ADA101MF55G		10	F55	0.12	32	EMVA630ADA100MF55G
	150	F55	0.30	79	EMVA100ADA151MF55G		22	F80	0.12	60	EMVA630ADA220MF80G
	220	F80	0.30	130	EMVA100ADA221MF80G		33	HA0	0.12	110	EMVA630ADA330MHA0G
	330	HA0	0.30	270	EMVA100ADA331MHA0G		47	HA0	0.12	130	EMVA630ADA470MHA0G
	470	HA0	0.30	280	EMVA100ADA471MHA0G		56	JA0	0.12	160	EMVA630ADA560MJA0G
	1,000	JA0	0.30	430	EMVA100ADA102MJA0G		68	JA0	0.12	170	EMVA630ADA680MJA0G
	2,200	KE0	0.36	960	EMVA100ARA222MKE0S		100	KE0	0.14	380	EMVA630ARA101MKE0S
	3,300	LH0	0.38	1,300	EMVA100□DA332MLH0S		220	KE0	0.14	580	EMVA630ARA221MKE0S
	4,700	LN0	0.40	1,550	EMVA100□DA472MLN0S		330	KG5	0.14	720	EMVA630ARA331MKG5S
16	4,700	MH0	0.40	1,600	EMVA100□DA472MMH0S	330	LH0	0.14	820	EMVA630□DA331MLH0S	
	6,800	MN0	0.44	1,850	EMVA100□DA682MMN0S	470	LH0	0.14	950	EMVA630□DA471MLH0S	
	22	D55	0.26	26	EMVA160ADA220MD55G	470	MH0	0.14	1,000	EMVA630□DA471MLH0S	
	33	E55	0.26	37	EMVA160ADA330ME55G	22	HA0	0.12	90	EMVA101ADA220MHA0G	
	47	E55	0.26	44	EMVA160ADA470ME55G	33	JA0	0.12	120	EMVA101ADA330MJA0G	
	100	F55	0.26	70	EMVA160ADA101MF55G	68	KE0	0.10	380	EMVA101ARA680MKE0S	
	150	F80	0.26	110	EMVA160ADA151MF80G	100	KE0	0.10	440	EMVA101ARA101MKE0S	
	220	F80	0.26	130	EMVA160ADA221MF80G	220	LN0	0.10	850	EMVA101□DA221MLN0S	
	330	HA0	0.26	270	EMVA160ADA331MHA0G	220	MH0	0.10	800	EMVA101□DA221MMH0S	
	470	HA0	0.26	280	EMVA160ADA471MHA0G	330	MN0	0.10	1,000	EMVA101□DA331MMN0S	
	680	JA0	0.26	380	EMVA160ADA681MJA0G	47	KG5	0.20	370	EMVA161ARA470MKG5S	
	1,000	KE0	0.30	710	EMVA160ARA102MKE0S	68	LH0	0.20	500	EMVA161□DA680MLH0S	
2,200	LH0	0.32	1,150	EMVA160□DA222MLH0S	100	LN0	0.20	590	EMVA161□DA101MLN0S		
3,300	LN0	0.34	1,450	EMVA160□DA332MLN0S	100	MH0	0.20	590	EMVA161□DA101MMH0S		
3,300	MH0	0.34	1,450	EMVA160□DA332MMH0S	22	KE0	0.20	240	EMVA201ARA220MKE0S		
4,700	MN0	0.36	1,750	EMVA160□DA472MMN0S	33	KG5	0.20	310	EMVA201ARA330MKG5S		
25	10	D55	0.16	24	EMVA250ADA100MD55G	47	LH0	0.20	420	EMVA201□DA470MLH0S	
	22	E55	0.16	41	EMVA250ADA220ME55G	68	LN0	0.20	510	EMVA201□DA680MLN0S	
	33	E55	0.16	47	EMVA250ADA330ME55G	68	MH0	0.20	510	EMVA201□DA680MMH0S	
	47	F55	0.16	60	EMVA250ADA470MF55G	100	MN0	0.20	590	EMVA201□DA101MMN0S	
	56	F55	0.16	66	EMVA250ADA560MF55G	10	KE0	0.20	150	EMVA251ARA100MKE0S	
	100	F80	0.16	120	EMVA250ADA101MF80G	22	KG5	0.20	240	EMVA251ARA220MKG5S	
	150	HA0	0.16	210	EMVA250ADA151MHA0G	33	LH0	0.20	340	EMVA251□DA330MLH0S	
	220	HA0	0.16	260	EMVA250ADA221MHA0G	47	LN0	0.20	420	EMVA251□DA470MLN0S	
	330	HA0	0.16	300	EMVA250ADA331MHA0G	47	MH0	0.20	420	EMVA251□DA470MMH0S	
	470	JA0	0.16	400	EMVA250ADA471MJA0G	68	MN0	0.20	490	EMVA251□DA680MMN0S	
	1,000	KE0	0.26	820	EMVA250ARA102MKE0S	4.7	KE0	0.25	120	EMVA401ARA4R7MKE0S	
	2,200	LN0	0.28	1,450	EMVA250□DA222MLN0S	10	LH0	0.25	140	EMVA401□DA100MLH0S	
2,200	MH0	0.28	1,400	EMVA250□DA222MMH0S	22	LN0	0.25	280	EMVA401□DA220MLN0S		
3,300	MN0	0.30	1,800	EMVA250□DA332MMN0S	22	MH0	0.25	280	EMVA401□DA220MMH0S		
35	4.7	D55	0.14	18	EMVA350ADA4R7MD55G	33	MN0	0.25	350	EMVA401□DA330MMN0S	
	10	D55	0.14	24	EMVA350ADA100MD55G	4.7	KE0	0.25	120	EMVA451ARA4R7MKE0S	
	22	E55	0.14	41	EMVA350ADA220ME55G	10	LH0	0.25	140	EMVA451□DA100MLH0S	
	33	F55	0.14	54	EMVA350ADA330MF55G	22	LN0	0.25	280	EMVA451□DA220MLN0S	
	47	F60	0.14	64	EMVA350ADA470MF60G	33	MN0	0.25	350	EMVA451□DA330MMN0S	
	100	F80	0.14	120	EMVA350ADA101MF80G						

□ : Enter the appropriate terminal code.

**Alchip™ - MV Series**

- From 5.2L height
- Suitable to fit for downsized equipment
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant




**◆ SPECIFICATIONS**

Items	Characteristics										
Category Temperature Range	-40 to +85°C										
Rated Voltage Range	4 to 63V <sub>dc</sub>										
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)										
Leakage Current	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)										
Dissipation Factor (tanδ)	Rated voltage (V <sub>dc</sub> )	4V	6.3V	10V	16V	25V	35V	50V	63V		
	tanδ (Max.)	B55	0.42	0.27	0.23	0.19	0.16	0.14	0.12	—	
		D55 to F60	0.42	0.24	0.20	0.16	0.14	0.12	0.10	0.12	
H63 to JA0	—	0.40	0.30	0.26	0.16	0.14	0.12	0.12			
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V <sub>dc</sub> )	4V	6.3V	10V	16V	25V	35V	50V	63V		
	Z(-25°C)/Z(+20°C)	7	4	3	2	2	2	2	2		
	Z(-40°C)/Z(+20°C)	B55	17	10	8	6	4	3	3	—	
		D55 to F60	15	10	8	6	4	3	3	3	
H63 to JA0	—	10	8	6	4	3	3	3			
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours (B55 size 1,000 hours) at 85°C.										
	Capacitance change	≤±20% of the initial value									
	D.F. (tanδ)	≤200% of the initial specified value									
	Leakage current	≤The initial specified value									
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 85°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.										
	Case code	B55			D55 to JA0						
	Capacitance change	≤±20% of the initial value			≤±15% of the initial value						
	D.F. (tanδ)	≤200% of the initial specified value			≤150% of the initial specified value						
	Leakage current	≤The initial specified value			≤The initial specified value						

**◆ DIMENSIONS [mm]**

● Terminal Code : A

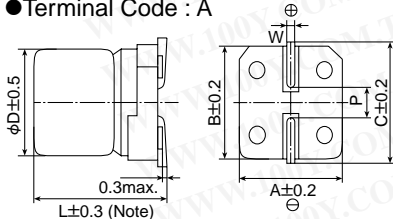


Note : L±0.5 for H63 to JA0


Size code	D	L	A	B	C	W	P
B55	3	5.2	3.3	3.3	3.7	0.45 to 0.75	0.8
D55 & D60	4	*5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55 & E60	5	*5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55 & F60	6.3	*5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
H63	8	6.3	8.3	8.3	9.0	0.5 to 0.8	2.3
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

\* : L=5.7 for D60, E60 and F60.

**◆ MARKING**



**◆ PART NUMBERING SYSTEM**

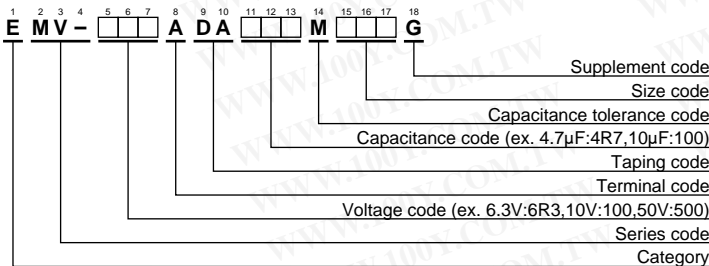

Please refer to "Product code guide (surface mount type)"

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Size code	tanδ	Rated ripple current (mA rms/85°C, 120Hz)	Part No.	WV (Vdc)	Cap (μF)	Size code	tanδ	Rated ripple current (mA rms/85°C, 120Hz)	Part No.
4	22	B55	0.42	14	EMV-4R0ADA220MB55G	50	0.10	B55	0.12	1.0	EMV-500ADAR10MB55G
	33	D55	0.42	23	EMV-4R0ADA330MD55G		0.10	D55	0.10	1.3	EMV-500ADAR10MD55G
	47	D55	0.42	27	EMV-4R0ADA470MD55G		(0.15)	(B55)	(0.12)	(2.0)	EMV-500ADAR15MB55G
	(68)	(E55)	(0.42)	(38)	EMV-4R0ADA680ME55G		(0.15)	(D55)	(0.10)	(2.0)	EMV-500ADAR15MD55G
	100	E55	0.42	46	EMV-4R0ADA101ME55G		0.22	B55	0.12	2.0	EMV-500ADAR22MB55G
220	F55	0.42	74	EMV-4R0ADA221MF55G	0.22		D55	0.10	2.9	EMV-500ADAR22MD55G	
6.3	(15)	(B55)	(0.27)	(14.5)	EMV-6R3ADA150MB55G		0.33	B55	0.12	3.0	EMV-500ADAR33MB55G
	22	B55	0.27	17.5	EMV-6R3ADA220MB55G		0.33	D55	0.10	3.5	EMV-500ADAR33MD55G
	22	D55	0.24	23	EMV-6R3ADA220MD55G		0.47	B55	0.12	3.8	EMV-500ADAR47MB55G
	47	E55	0.24	38	EMV-6R3ADA470ME55G		0.47	D55	0.10	4.2	EMV-500ADAR47MD55G
	100	F55	0.24	60	EMV-6R3ADA101MF55G		(0.68)	(B55)	(0.12)	(4.6)	EMV-500ADAR68MB55G
	330	H63	0.40	190	EMV-6R3ADA331MH63G		(0.68)	(D55)	(0.10)	(5.1)	EMV-500ADAR68MD55G
	470	HA0	0.40	265	EMV-6R3ADA471MHA0G		1.0	B55	0.12	5.6	EMV-500ADA1R0MB55G
1,000	JA0	0.40	400	EMV-6R3ADA102MJA0G	1.0		D55	0.10	6.2	EMV-500ADA1R0MD55G	
10	10	B55	0.23	12.8	EMV-100ADA100MB55G		(1.5)	(B55)	(0.12)	(6.9)	EMV-500ADA1R5MB55G
	(15)	(D55)	(0.20)	(20)	EMV-100ADA150MD55G		(1.5)	(D55)	(0.10)	(7.5)	EMV-500ADA1R5MD55G
	33	E55	0.20	35	EMV-100ADA330ME55G		2.2	B55	0.12	8.3	EMV-500ADA2R2MB55G
	(68)	(F55)	(0.20)	(54)	EMV-100ADA680MF55G		2.2	D55	0.10	10	EMV-500ADA2R2MD55G
	100	F60	0.20	70	EMV-100ADA101MF60G		3.3	D55	0.10	14	EMV-500ADA3R3MD55G
	220	H63	0.30	175	EMV-100ADA221MH63G		4.7	E55	0.10	19	EMV-500ADA4R7ME55G
16	(6.8)	(B55)	(0.19)	(11.6)	EMV-160ADA6R8MB55G		(6.8)	(F55)	(0.10)	(24)	EMV-500ADA6R8MF55G
	10	B55	0.19	14	EMV-160ADA100MB55G		10	F55	0.10	29	EMV-500ADA100MF55G
	10	D55	0.16	17	EMV-160ADA100MD55G		(15)	(F60)	(0.10)	(32)	EMV-500ADA150MF60G
	(15)	(E55)	(0.16)	(26)	EMV-160ADA150ME55G		22	F60	0.10	45	EMV-500ADA220MF60G
	22	E55	0.16	32	EMV-160ADA220ME55G		33	H63	0.12	95	EMV-500ADA330MH63G
	47	F55	0.16	50	EMV-160ADA470MF55G	47	HA0	0.12	140	EMV-500ADA470MHA0G	
	(68)	(F60)	(0.16)	(78)	EMV-160ADA680MF60G	(68)	(JA0)	(0.12)	(170)	EMV-500ADA680MJA0G	
	220	HA0	0.26	215	EMV-160ADA221MHA0G	100	JA0	0.12	195	EMV-500ADA101MJA0G	
	330	HA0	0.26	270	EMV-160ADA331MHA0G	63	0.10	D55	0.12	1.3	EMV-630ADAR10MD55G
	470	JA0	0.26	330	EMV-160ADA471MJA0G		(0.15)	(D55)	(0.12)	(2.0)	EMV-630ADAR15MD55G
25	4.7	B55	0.16	10.5	EMV-250ADA4R7MB55G		0.22	D55	0.12	2.9	EMV-630ADAR22MD55G
	(6.8)	(D55)	(0.14)	(16)	EMV-250ADA6R8MD55G		0.33	D55	0.12	3.5	EMV-630ADAR33MD55G
	33	F55	0.14	45	EMV-250ADA330MF55G		0.47	D55	0.12	4.2	EMV-630ADAR47MD55G
	47	F60	0.14	65	EMV-250ADA470MF60G		(0.68)	(D55)	(0.12)	(5.1)	EMV-630ADAR68MD55G
	(68)	(H63)	(0.16)	(115)	EMV-250ADA680MH63G		1.0	D60	0.12	7.0	EMV-630ADA1R0MD60G
	100	H63	0.16	145	EMV-250ADA101MH63G		(1.5)	(D60)	(0.12)	(8.4)	EMV-630ADA1R5MD60G
330	JA0	0.16	305	EMV-250ADA331MJA0G	2.2		D60	0.12	10	EMV-630ADA2R2MD60G	
35	2.2	B55	0.14	7.7	EMV-350ADA2R2MB55G		3.3	E60	0.12	13	EMV-630ADA3R3ME60G
	3.3	B55	0.14	9.4	EMV-350ADA3R3MB55G		4.7	F60	0.12	18.5	EMV-630ADA4R7MF60G
	4.7	D55	0.12	15	EMV-350ADA4R7MD55G		(6.8)	(F60)	(0.12)	(21)	EMV-630ADA6R8MF60G
	(6.8)	(E55)	(0.12)	(20)	EMV-350ADA6R8ME55G		10	HA0	0.12	46	EMV-630ADA100MHA0G
	10	E55	0.12	25	EMV-350ADA100ME55G		(15)	(HA0)	(0.12)	(52)	EMV-630ADA150MHA0G
	(15)	(F55)	(0.12)	(33)	EMV-350ADA150MF55G		22	HA0	0.12	69	EMV-630ADA220MHA0G
	22	F55	0.12	40	EMV-350ADA220MF55G		33	HA0	0.12	85	EMV-630ADA330MHA0G
	33	F60	0.12	55	EMV-350ADA330MF60G		47	HA0	0.12	101	EMV-630ADA470MHA0G
	47	H63	0.14	105	EMV-350ADA470MH63G		(68)	(JA0)	(0.12)	(125)	EMV-630ADA680MJA0G
	(68)	(HA0)	(0.14)	(157)	EMV-350ADA680MHA0G						
	100	HA0	0.14	175	EMV-350ADA101MHA0G						
	220	JA0	0.14	265	EMV-350ADA221MJA0G						

( ) : Second standard

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Alchip™ - **MVE** Series

- Rated voltage range : 6.3 to 450V, capacitance range : 0.47 to 6,800μF
- Endurance : 1,000 to 2,000 hours at 105°C
- Case size range : φ4×5.2L to φ18×21.5L
- Solvent resistant type except 100 to 450V<sub>dc</sub> (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant

MVE

↓  
Downsized  
Expanded case sizes  
MVK




◆ SPECIFICATIONS

Items	Characteristics		
Category	-40 to +105°C		
Temperature Range			
Rated Voltage Range	6.3 to 450V <sub>dc</sub>		
Capacitance Tolerance	±20%(M) (20°C, 120Hz)		
Leakage Current	Rated voltage(V <sub>dc</sub> )	6.3 to 100V	
	D55 to JA0	I=0.01CV or 3μA, whichever is greater (2 minutes)	
	KE0 to MN0	I=0.03CV or 4μA, whichever is greater (1 minute)	
		160 to 450V	
		I=0.04CV+100μA (1minute)	
	Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (20°C)		
Dissipation Factor (tanδ)	See STANDARD RATINGS (20°C, 120Hz)		
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V <sub>dc</sub> )	6.3V 10V 16V 25V 35V 50V 63V 100V 160 to 250V 400 to 450V	
	D55 to JA0	Z(-25°C)/Z(+20°C)	4 3 2 2 2 2 2 3 — —
		Z(-40°C)/Z(+20°C)	12 8 6 4 3 3 3 4 — —
	KE0 to MN0	Z(-25°C)/Z(+20°C)	5 4 3 2 2 2 2 2 3 6
Z(-40°C)/Z(+20°C)		10 8 6 4 3 3 3 3 6 10	
		(120Hz)	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for the specified period of time at 105°C.		
	Size code	D55 to F80	
	Time	1,000 hours	
	Capacitance change	≤±30% of the initial value	
	D.F. (tanδ)	≤300% of the initial specified value	
	Leakage current	≤The initial specified value	
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours (500 hours for B55 to F80 size) at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.		
	Size code	D55 to F80	
	Capacitance change	≤±25% of the initial value	
	D.F. (tanδ)	≤200% of the initial specified value	
	Leakage current	≤The initial specified value	
		HA0 to MN0	
	2,000 hours		
	≤±20% of the initial value		
	≤200% of the initial specified value		
	≤The initial specified value		

◆ DIMENSIONS [mm]

- Terminal Code : A
- Size code : D55 to MN0

- Terminal Code : G
- Size code : LH0 to MN0

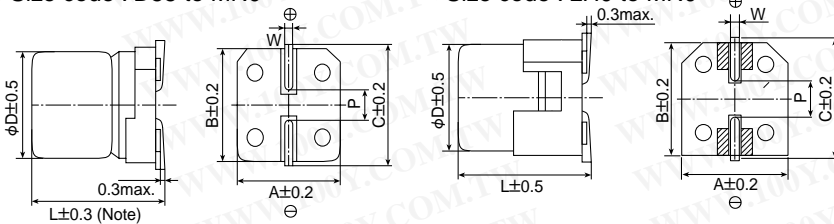


Note : L±0.5 for HA0 to MN0

▨ : Dummy terminals

Size code	D	L	A	B	C	W	P
D55	4	5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55	5	5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55	6.3	5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5
KE0	12.5	13.5	13.0	13.0	13.7	1.0 to 1.3	4.2
KG5	12.5	16.0	13.0	13.0	13.7	1.0 to 1.3	4.2
LH0	16	16.5	17.0	17.0	18.0	1.0 to 1.3	6.5
LN0	16	21.5	17.0	17.0	18.0	1.0 to 1.3	6.5
MH0	18	16.5	19.0	19.0	20.0	1.0 to 1.3	6.5
MN0	18	21.5	19.0	19.0	20.0	1.0 to 1.3	6.5

◆ PART NUMBERING SYSTEM

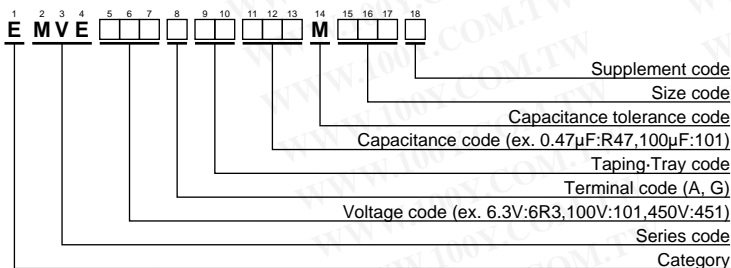


Please refer to "Product code guide (surface mount type)"

◆ MARKING

D55 to JA0  
Ex)16V22μF



KE0 to MN0  
Ex)25V1,000μF



勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw



# SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS

Downsized, 105°C

Alchip™-MVE Series

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## ◆STANDARD RATINGS


□ is not solvent resistant.

VV (Vdc)	Cap (μF)	Size code	tanδ	Rated ripple current (mAmps/105°C,120Hz)	Part No.	VV (Vdc)	Cap (μF)	Size code	tanδ	Rated ripple current (mAmps/105°C,120Hz)	Part No.
6.3	22	D55	0.30	22	EMVE6R3ADA220MD55G	35	470	KE0	0.22	520	EMVE350ARA471MKE0S
	33	E55	0.30	34	EMVE6R3ADA330ME55G		470	LH0	0.22	650	EMVE350□DA471MLH0S
	47	E55	0.30	38	EMVE6R3ADA470ME55G		1,000	LH0	0.22	750	EMVE350□DA102MLH0S
	100	F55	0.30	69	EMVE6R3ADA101MF55G		1,000	MH0	0.22	1,000	EMVE350□DA102MMH0S
	220	F80	0.45	120	EMVE6R3ADA221MF80G		2,200	MN0	0.24	1,450	EMVE350□DA222MMN0S
	330	HA0	0.40	290	EMVE6R3ADA331MHA0G		0.47	D55	0.12	5.0	EMVE500ADAR47MD55G
	470	HA0	0.45	320	EMVE6R3ADA471MHA0G		1.0	D55	0.12	8.0	EMVE500ADA1R0MD55G
	680	HA0	0.45	340	EMVE6R3ADA681MHA0G		2.2	D55	0.12	12	EMVE500ADA2R2MD55G
	1,000	JA0	0.40	410	EMVE6R3ADA102MJA0G		3.3	D55	0.12	15	EMVE500ADA3R3MD55G
	1,500	JA0	0.45	550	EMVE6R3ADA152MJA0G		4.7	E55	0.12	20	EMVE500ADA4R7ME55G
	2,200	KE0	0.40	680	EMVE6R3ARA222MKE0S		10	F55	0.12	32	EMVE500ADA100MF55G
	2,200	LH0	0.40	840	EMVE6R3□DA222MLH0S		22	F60	0.12	47	EMVE500ADA220MF60G
	3,300	KG5	0.42	850	EMVE6R3ARA332MKG5S		33	F80	0.14	65	EMVE500ADA330MF80G
	3,300	MH0	0.42	1,000	EMVE6R3□DA332MMH0S		47	F80	0.14	80	EMVE500ADA470MF80G
	4,700	LNO	0.44	1,200	EMVE6R3□DA472MLN0S		100	HA0	0.14	230	EMVE500ADA101MHA0G
	4,700	MH0	0.44	1,200	EMVE6R3□DA472MMH0S		220	JA0	0.14	375	EMVE500ADA221MJA0G
6,800	LNO	0.48	1,200	EMVE6R3□DA682MLN0S	330	KE0	0.18	500	EMVE500ARA331MKE0S		
6,800	MN0	0.48	1,350	EMVE6R3□DA682MMN0S	330	LH0	0.18	600	EMVE500□DA331MLH0S		
10	22	E55	0.24	30	EMVE100ADA220ME55G	470	LH0	0.18	700	EMVE500□DA471MLH0S	
	33	E55	0.24	34	EMVE100ADA330ME55G	470	MH0	0.18	750	EMVE500□DA471MMH0S	
	47	F55	0.24	48	EMVE100ADA470MF55G	1,000	MN0	0.18	1,200	EMVE500□DA102MMN0S	
	100	F55	0.30	69	EMVE100ADA101MF55G	0.47	D55	0.12	5.0	EMVE630ADAR47MD55G	
	150	F80	0.35	100	EMVE100ADA151MF80G	1.0	D55	0.12	8.0	EMVE630ADA1R0MD55G	
	220	F80	0.35	120	EMVE100ADA221MF80G	2.2	D55	0.12	12	EMVE630ADA2R2MD55G	
	330	HA0	0.35	290	EMVE100ADA331MHA0G	3.3	E55	0.12	17	EMVE630ADA3R3ME55G	
	470	HA0	0.35	320	EMVE100ADA471MHA0G	4.7	F55	0.12	22	EMVE630ADA4R7MF55G	
	1,000	JA0	0.35	410	EMVE100ADA102MJA0G	10	F55	0.12	32	EMVE630ADA100MF55G	
	2,200	KG5	0.36	750	EMVE100ARA222MKG5S	22	F80	0.12	58	EMVE630ADA220MF80G	
	2,200	LH0	0.36	850	EMVE100□DA222MLH0S	33	HA0	0.12	140	EMVE630ADA330MHA0G	
	3,300	LH0	0.38	1,000	EMVE100□DA332MLH0S	47	HA0	0.12	170	EMVE630ADA470MHA0G	
	3,300	MH0	0.38	1,100	EMVE100□DA332MMH0S	100	JA0	0.12	310	EMVE630ADA101MJA0G	
	4,700	LNO	0.40	1,300	EMVE100□DA472MLN0S	220	KE0	0.14	470	EMVE630ARA221MKE0S	
	4,700	MN0	0.40	1,350	EMVE100□DA472MMN0S	220	LH0	0.14	560	EMVE630□DA221MLH0S	
	16	10	D55	0.20	17	EMVE160ADA100MD55G	330	LH0	0.14	700	EMVE630□DA331MLH0S
22		E55	0.20	30	EMVE160ADA220ME55G	330	MH0	0.14	750	EMVE630□DA331MMH0S	
33		F55	0.20	45	EMVE160ADA330MF55G	470	LNO	0.14	900	EMVE630□DA471MLN0S	
47		F55	0.20	48	EMVE160ADA470MF55G	470	MH0	0.14	900	EMVE630□DA471MMH0S	
100		F55	0.26	69	EMVE160ADA101MF55G	22	HA0	0.12	100	EMVE101ADA220MHA0G	
150		F80	0.28	100	EMVE160ADA151MF80G	33	JA0	0.12	150	EMVE101ADA330MJA0G	
220		F80	0.28	120	EMVE160ADA221MF80G	47	KE0	0.10	250	EMVE101ARA470MKE0S	
330		HA0	0.28	290	EMVE160ADA331MHA0G	68	KE0	0.10	300	EMVE101ARA680MKE0S	
470		HA0	0.28	320	EMVE160ADA471MHA0G	100	KE0	0.10	380	EMVE101ARA101MKE0S	
680		JA0	0.28	470	EMVE160ADA681MJA0G	100	LH0	0.10	450	EMVE101□DA101MLH0S	
1,000		KE0	0.30	550	EMVE160ARA102MKE0S	220	LNO	0.10	750	EMVE101□DA221MLN0S	
1,000		LH0	0.30	650	EMVE160□DA102MLH0S	220	MH0	0.10	750	EMVE101□DA221MMH0S	
2,200		LH0	0.32	950	EMVE160□DA222MLH0S	330	MN0	0.10	980	EMVE101□DA331MMN0S	
2,200		MH0	0.32	1,000	EMVE160□DA222MMH0S	33	KE0	0.15	95	EMVE161ADA680MLN0S	
3,300		LNO	0.34	1,200	EMVE160□DA332MLN0S	47	LH0	0.15	260	EMVE161□DA470MLH0S	
3,300		MH0	0.34	1,200	EMVE160□DA332MMH0S	68	LNO	0.15	320	EMVE161□DA680MLN0S	
25	10	E55	0.16	27	EMVE250ADA100ME55G	100	MH0	0.15	320	EMVE161□DA680MMH0S	
	22	F55	0.16	44	EMVE250ADA220MF55G	100	LNO	0.15	380	EMVE161□DA101MLN0S	
	33	F55	0.16	50	EMVE250ADA330MF55G	10	KE0	0.15	80	EMVE201ARA100MKE0S	
	47	F55	0.16	60	EMVE250ADA470MF55G	22	KG5	0.15	110	EMVE201ARA220MKG5S	
	100	F80	0.18	100	EMVE250ADA101MF80G	33	LH0	0.15	220	EMVE201□DA330MLH0S	
	150	HA0	0.18	240	EMVE250ADA151MHA0G	47	LNO	0.15	270	EMVE201□DA470MLN0S	
	220	HA0	0.18	320	EMVE250ADA221MHA0G	47	MH0	0.15	270	EMVE201□DA470MMH0S	
	330	JA0	0.16	450	EMVE250ADA331MJA0G	68	MN0	0.15	330	EMVE201□DA680MMN0S	
	470	JA0	0.18	490	EMVE250ADA471MJA0G	4.7	KE0	0.15	65	EMVE251ARA4R7MKE0S	
	1,000	LH0	0.26	820	EMVE250□DA102MLH0S	10	KG5	0.15	105	EMVE251ARA100MKG5S	
	1,000	MH0	0.26	880	EMVE250□DA102MMH0S	22	LH0	0.15	180	EMVE251□DA220MLH0S	
	2,200	LNO	0.28	1,250	EMVE250□DA222MLN0S	33	LNO	0.15	230	EMVE251□DA330MLN0S	
	2,200	MN0	0.28	1,300	EMVE250□DA222MMN0S	33	MH0	0.15	230	EMVE251□DA330MMH0S	
	35	4.7	D55	0.14	16	EMVE350ADA4R7MD55G	47	MN0	0.15	280	EMVE251□DA470MMN0S
		10	E55	0.14	27	EMVE350ADA100ME55G	4.7	KG5	0.20	50	EMVE401ARA4R7MKG5S
		22	F55	0.14	44	EMVE350ADA220MF55G	10	LH0	0.20	85	EMVE401□DA100MLH0S
33		F60	0.14	54	EMVE350ADA330MF60G	22	MN0	0.20	130	EMVE401□DA220MMN0S	
47		F80	0.16	80	EMVE350ADA470MF80G	3.3	KE0	0.20	40	EMVE451ARA3R3MKE0S	
100		F80	0.16	100	EMVE350ADA101MF80G	4.7	KG5	0.20	50	EMVE451ARA4R7MKG5S	
150		HA0	0.16	260	EMVE350ADA151MHA0G	10	LH0	0.20	85	EMVE451□DA100MLH0S	
220		JA0	0.16	375	EMVE350ADA221MJA0G	22	MN0	0.20	130	EMVE451□DA220MMN0S	
330		JA0	0.16	450	EMVE350ADA331MJA0G						

□ : Enter the appropriate terminal code.

**Alchip™ - MVK Series**

- Endurance : 1,000 to 2,000 hours at 105°C
- Suitable to fit for downsized equipment
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant




◆ **SPECIFICATIONS**

Items	Characteristics							
<b>Category</b>	-40 to +105°C							
<b>Temperature Range</b>	-40 to +105°C							
<b>Rated Voltage Range</b>	6.3 to 50V <sub>dc</sub>							
<b>Capacitance Tolerance</b>	±20% (M) (at 20°C, 120Hz)							
<b>Leakage Current</b>	I = 0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)							
<b>Dissipation Factor (tanδ)</b>	Rated voltage (V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V	
	tanδ (Max.)	D55 to F55	0.30	0.24	0.20	0.16	0.14	0.12
		H63 to JA0	0.40	0.30	0.26	0.16	0.14	0.12
<b>Low Temperature Characteristics (Max. Impedance Ratio)</b>	Rated voltage (V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V	
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	
	Z(-40°C)/Z(+20°C)	10	8	6	4	3	3	
<b>Endurance</b>	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for the specified period of time at 105°C.							
	Case code	D55 to F55			H63 to JA0			
	Time	1,000hours			2,000hours			
	Capacitance change	≤±30% of the initial value			≤±20% of the initial value			
	D.F. (tanδ)	≤300% of the initial specified value			≤200% of the initial specified value			
	Leakage current	≤The initial specified value			≤The initial specified value			
<b>Shelf Life</b>	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for the specified time at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.							
	Case code	D55 to F55			H63 to JA0			
	Time	500hours			1,000hours			
	Capacitance change	≤±25% of the initial value			≤±20% of the initial value			
	D.F. (tanδ)	≤200% of the initial specified value			≤200% of the initial specified value			
	Leakage current	≤The initial specified value			≤The initial specified value			

◆ **DIMENSIONS [mm]**

● Terminal Code : A

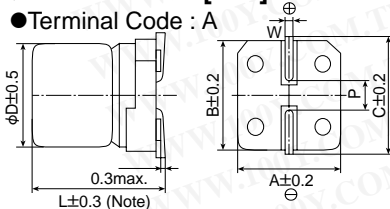

Note : L±0.5 for H63 to JA0


Size code	D	L	A	B	C	W	P
D55	4	5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55	5	5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55	6.3	5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
H63	8	6.3	8.3	8.3	9.0	0.5 to 0.8	2.3
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

◆ **MARKING**

EX) 6.3V/100μF



◆ **PART NUMBERING SYSTEM**

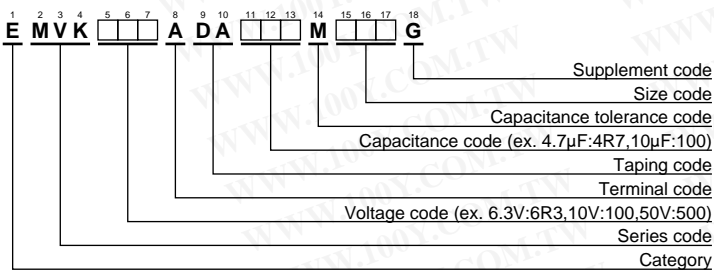

Please refer to "Product code guide (surface mount type)"

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)





Alchip™-MVK Series

### ◆STANDARD RATINGS

WV (Vdc)	Cap (μF)	Case code	tanδ	Rated ripple current (mA <sub>RMS</sub> /105°C,120Hz)	Part No.	WV (Vdc)	Cap (μF)	Case code	tanδ	Rated ripple current (mA <sub>RMS</sub> /105°C,120Hz)	Part No.
6.3	22	D55	0.30	21	EMVK6R3ADA220MD55G	35	10	E55	0.14	25	EMVK350ADA100ME55G
	47	E55	0.30	36	EMVK6R3ADA470ME55G		22	F55	0.14	40	EMVK350ADA220MF55G
	100	F55	0.30	56	EMVK6R3ADA101MF55G		33	H63	0.14	80	EMVK350ADA330MH63G
	330	HA0	0.40	290	EMVK6R3ADA331MHA0G		220	JA0	0.14	375	EMVK350ADA221MJA0G
	1,000	JA0	0.40	410	EMVK6R3ADA102MJA0G		50	0.10	D55	0.12	1.3
10	33	E55	0.24	34	EMVK100ADA330ME55G	0.22		D55	0.12	2.6	EMVK500ADAR22MD55G
	100	H63	0.30	90	EMVK100ADA101MH63G	0.33		D55	0.12	3.2	EMVK500ADAR33MD55G
	220	HA0	0.30	180	EMVK100ADA221MHA0G	0.47		D55	0.12	3.8	EMVK500ADAR47MD55G
16	10	D55	0.20	16	EMVK160ADA100MD55G	1.0		D55	0.12	5.6	EMVK500ADA1R0MD55G
	22	E55	0.20	30	EMVK160ADA220ME55G	2.2		D55	0.12	10	EMVK500ADA2R2MD55G
	47	F55	0.20	48	EMVK160ADA470MF55G	3.3		D55	0.12	14	EMVK500ADA3R3MD55G
	470	JA0	0.26	460	EMVK160ADA471MJA0G	4.7		E55	0.12	19	EMVK500ADA4R7ME55G
25	33	F55	0.16	45	EMVK250ADA330MF55G	10		F55	0.12	29	EMVK500ADA100MF55G
	47	H63	0.16	80	EMVK250ADA470MH63G	22		H63	0.12	70	EMVK500ADA220MH63G
	100	HA0	0.16	180	EMVK250ADA101MHA0G	33	HA0	0.12	140	EMVK500ADA330MHA0G	
	330	JA0	0.16	450	EMVK250ADA331MJA0G	47	HA0	0.12	170	EMVK500ADA470MH0A0G	
35	4.7	D55	0.14	15	EMVK350ADA4R7MD55G	100	JA0	0.12	310	EMVK500ADA101MJA0G	

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**Alchip™-MZA Series**

- Lowest impedance, 2,000 hours at 105°C
- Solvent resistant type
- RoHS Compliant

**MZA**

↑ Lower Z  
MVY




**◆ SPECIFICATIONS**

Items	Characteristics								
Category Temperature Range	-55 to +105°C								
Rated Voltage Range	6.3 to 80V <sub>dc</sub>								
Capacitance Tolerance	±20%(M) (20°C, 120Hz)								
Leakage Current	I=0.01CV or 3μA, whichever is greater Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)								
Dissipation Factor (tanδ)	Rated voltage(V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V	63V	80V
	tanδ (Max.)	0.26	0.19	0.16	0.14	0.12	0.10	0.08	0.08
Low Temperature Characteristics (Max. impedance Ratio)	Rated voltage(V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V	63V	80V
	Z(-25°C)/Z(+20°C)	2	2	2	2	2	2	2	2
	Z(-40°C)/Z(+20°C)	3	3	3	3	3	3	3	3
	Z(-55°C)/Z(+20°C)	4	4	4	3	3	3	3	3
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 105°C.								
	Capacitance change	≤±30% of the initial value							
	D.F. (tanδ)	≤200% of the initial specified value							
	Leakage current	≤The initial specified value							

**◆ DIMENSIONS [mm]**

● Terminal Code : A

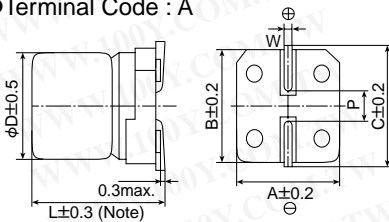

Note : L±0.5 for HA0 and JA0


Size code	D	L	A	B	C	W	P
D61	4	5.8	4.3	4.3	5.1	0.5 to 0.8	1.0
E61	5	5.8	5.3	5.3	5.9	0.5 to 0.8	1.4
F61	6.3	5.8	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

**◆ MARKING**

EX) 16V220μF



**◆ PART NUMBERING SYSTEM**

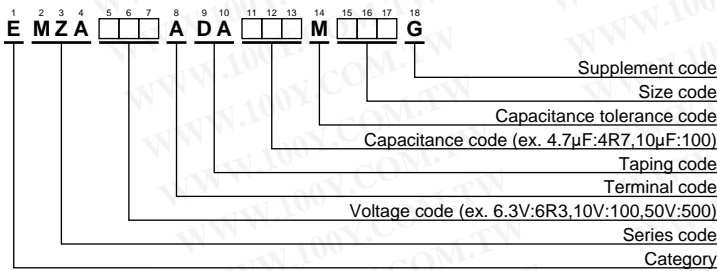

Please refer to "Product code guide (surface mount type)"

**◆ RATED VOLTAGE SYMBOL**

Rated voltage (V <sub>dc</sub> )	Symbol
6.3	j
10	A
16	C
25	E
35	V
50	H
63	J
80	K

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw



# SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS

Lower impedance, 105°C

Alchip™-MZA Series

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


## ◆STANDARD RATINGS

WV(Vdc)	Cap(μF)	Case code	tanδ	Impedance (Ωmax/20°C, 100kHz)	Rated ripple current (mA rms/105°C, 100kHz)	Part No.
6.3	22	D61	0.26	1.35	90	EMZA6R3ADA220MD61G
	47	D61	0.26	1.35	90	EMZA6R3ADA470MD61G
	47	E61	0.26	0.70	160	EMZA6R3ADA470ME61G
	100	E61	0.26	0.70	160	EMZA6R3ADA101ME61G
	100	F61	0.26	0.36	240	EMZA6R3ADA101MF61G
	220	F61	0.26	0.36	240	EMZA6R3ADA221MF61G
	330	F80	0.26	0.34	280	EMZA6R3ADA331MF80G
	470	HA0	0.26	0.16	600	EMZA6R3ADA471MHA0G
	1,000	HA0	0.26	0.16	600	EMZA6R3ADA102MHA0G
	1,500	JA0	0.26	0.08	850	EMZA6R3ADA152MJA0G
10	22	D61	0.19	1.35	90	EMZA100ADA220MD61G
	33	D61	0.19	1.35	90	EMZA100ADA330MD61G
	33	E61	0.19	0.70	160	EMZA100ADA330ME61G
	220	F80	0.19	0.34	280	EMZA100ADA221MF80G
	330	HA0	0.19	0.16	600	EMZA100ADA331MHA0G
	470	HA0	0.19	0.16	600	EMZA100ADA471MHA0G
	680	HA0	0.19	0.16	600	EMZA100ADA681MHA0G
	1,000	JA0	0.19	0.08	850	EMZA100ADA102MJA0G
16	10	D61	0.16	1.35	90	EMZA160ADA100MD61G
	22	D61	0.16	1.35	90	EMZA160ADA220MD61G
	22	E61	0.16	0.70	160	EMZA160ADA220ME61G
	47	E61	0.16	0.70	160	EMZA160ADA470ME61G
	47	F61	0.16	0.36	240	EMZA160ADA470MF61G
	100	F61	0.16	0.36	240	EMZA160ADA101MF61G
	220	F80	0.16	0.34	280	EMZA160ADA221MF80G
	330	HA0	0.16	0.16	600	EMZA160ADA331MHA0G
	470	HA0	0.16	0.16	600	EMZA160ADA471MHA0G
	680	JA0	0.16	0.08	850	EMZA160ADA681MJA0G
25	10	D61	0.14	1.35	90	EMZA250ADA100MD61G
	22	E61	0.14	0.70	160	EMZA250ADA220ME61G
	33	E61	0.14	0.70	160	EMZA250ADA330ME61G
	33	F61	0.14	0.36	240	EMZA250ADA330MF61G
	47	F61	0.14	0.36	240	EMZA250ADA470MF61G
	100	F80	0.14	0.34	280	EMZA250ADA101MF80G
	220	HA0	0.14	0.16	600	EMZA250ADA221MHA0G
	330	HA0	0.14	0.16	600	EMZA250ADA331MHA0G
	470	JA0	0.14	0.08	850	EMZA250ADA471MJA0G
	35	4.7	D61	0.12	1.35	90
10		D61	0.12	1.35	90	EMZA350ADA100MD61G
10		E61	0.12	0.70	160	EMZA350ADA100ME61G
22		E61	0.12	0.70	160	EMZA350ADA220ME61G
33		F61	0.12	0.36	240	EMZA350ADA330MF61G
47		F61	0.12	0.36	240	EMZA350ADA470MF61G
100		F80	0.12	0.34	280	EMZA350ADA101MF80G
100		HA0	0.12	0.16	600	EMZA350ADA101MHA0G
220		HA0	0.12	0.16	600	EMZA350ADA221MHA0G
330		JA0	0.12	0.08	850	EMZA350ADA331MJA0G
50	4.7	D61	0.10	2.90	60	EMZA500ADA4R7MD61G
	10	E61	0.10	1.52	85	EMZA500ADA100ME61G
	10	F61	0.10	0.88	165	EMZA500ADA100MF61G
	22	F61	0.10	0.88	165	EMZA500ADA220MF61G
	33	F80	0.10	0.68	195	EMZA500ADA330MF80G
	47	F80	0.10	0.68	195	EMZA500ADA470MF80G
	100	HA0	0.10	0.34	350	EMZA500ADA101MHA0G
	220	JA0	0.10	0.18	670	EMZA500ADA221MJA0G
63	4.7	E61	0.08	4.8	50	EMZA630ADA4R7ME61G
	10	F61	0.08	2.2	80	EMZA630ADA100MF61G
	22	F80	0.08	2.1	120	EMZA630ADA220MF80G
	33	HA0	0.08	0.70	250	EMZA630ADA330MHA0G
	47	HA0	0.08	0.70	250	EMZA630ADA470MHA0G
	68	HA0	0.08	0.70	250	EMZA630ADA680MHA0G
	100	JA0	0.08	0.45	400	EMZA630ADA101MJA0G
80	3.3	E61	0.08	5.0	25	EMZA800ADA3R3ME61G
	4.7	F61	0.08	3.0	40	EMZA800ADA4R7MF61G
	10	F80	0.08	2.4	60	EMZA800ADA100MF80G
	22	HA0	0.08	1.3	130	EMZA800ADA220MHA0G
	47	JA0	0.08	1.3	130	EMZA800ADA330MHA0G
					200	EMZA800ADA470MJA0G

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw

**Alchip™ - MVY Series**

- Endurance : 1,000 to 5,000 hours at 105°C
- Low impedance
- For digital equipment, especially DC-DC converters
- Solvent resistant type except 80 & 100V<sub>dc</sub> (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant




◆ **SPECIFICATIONS**

Items	Characteristics	
<b>Category</b> <b>Temperature Range</b>	-55 to +105°C (6.3 to 63V <sub>dc</sub> )    -40 to +105°C (80 & 100V <sub>dc</sub> )	
<b>Rated Voltage Range</b>	6.3 to 100V <sub>dc</sub>	
<b>Capacitance Tolerance</b>	±20% (M) (at 20°C, 120Hz)	
<b>Leakage Current</b>	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)	
<b>Dissipation Factor (tanδ)</b>	Rated voltage (V <sub>dc</sub> )	6.3V 10V 16V 25V 35V 50V 63V 80V 100V
	tanδ (Max.)	D55 to F80 0.24 0.20 0.16 0.14 0.12 0.12 — — — HA0 & JA0 0.28 0.24 0.20 0.16 0.14 0.12 — — — KE0 to MN0 0.26 0.22 0.18 0.16 0.14 0.12 0.14 0.10 0.10
	When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)	
<b>Low Temperature Characteristics (Max. Impedance Ratio)</b>	Rated voltage (V <sub>dc</sub> )	6.3V 10V 16V 25V 35V 50V 63V 80V 100V
	Z(-40°C)/Z(+20°C)	D55 to JA0 3 2 2 2 2 2 — — — KE0 to MN0 10 8 6 4 3 3 3 3 3
	(at 120Hz)	
<b>Endurance</b>	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for specified time at 105°C.	
	Time	D55 to F80 : 1,000 hours HA0 & JA0 : 2,000 hours KE0 to MN0 : 5,000 hours
	Rated voltage	6.3V <sub>dc</sub> (D55 to JA0)    6.3 to 100V <sub>dc</sub> (KE0 to MN0)
	Capacitance change	≤±30% of the initial value    ≤±20% of the initial value
	D.F. (tanδ)	≤300% of the initial specified value    ≤200% of the initial specified value
	Leakage current	≤The initial specified value    ≤The initial specified value
<b>Shelf Life</b>	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.	
	Rated voltage	6.3V <sub>dc</sub> (D55 to JA0)    6.3 to 100V <sub>dc</sub> (KE0 to MN0)
	Capacitance change	≤±30% of the initial value    ≤±20% of the initial value
	D.F. (tanδ)	≤300% of the initial specified value    ≤200% of the initial specified value
	Leakage current	≤The initial specified value    ≤The initial specified value


◆ **DIMENSIONS [mm]**

- Terminal Code : A
- Terminal Code : G
- Size code : D55 to MN0
- Size code : LH0 to MN0

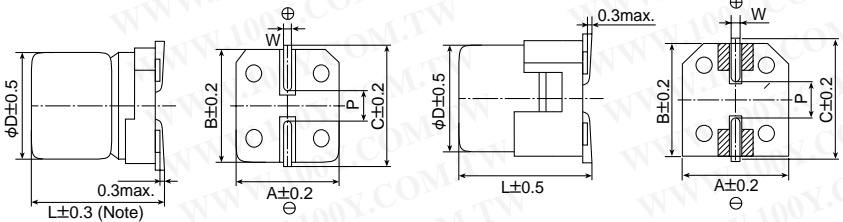


Size code	φD	L	A	B	C	W	P
D55	4	5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55	5	5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55	6.3	5.2	6.6	6.6	7.2	0.5 to 0.8	1.9
F61	6.3	5.8	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5
KE0	12.5	13.5	13.0	13.0	13.7	1.0 to 1.3	4.2
KG5	12.5	16.0	13.0	13.0	13.7	1.0 to 1.3	4.2
LH0	16	16.5	17.0	17.0	18.0	1.0 to 1.3	6.5
LN0	16	21.5	17.0	17.0	18.0	1.0 to 1.3	6.5
MH0	18	16.5	19.0	19.0	20.0	1.0 to 1.3	6.5
MN0	18	21.5	19.0	19.0	20.0	1.0 to 1.3	6.5

◆ **PART NUMBERING SYSTEM**

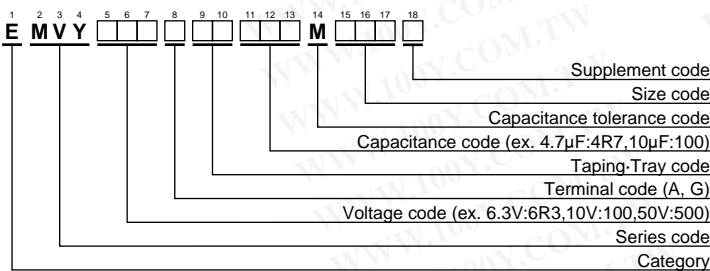

Please refer to "Product code guide (surface mount type)"

◆ **MARKING**

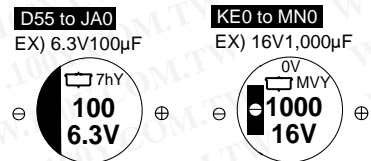



Alchip™-MVY Series

◆STANDARD RATINGS

□ is not solvent resistant (80/100Vdc).

Table with columns: WV (Vdc), Cap (µF), Size code, Impedance (Ωmax/20°C, 100kHz), Rated ripple current (mA rms/105°C, 100kHz), Part No. The table is organized into four main sections based on WV (6.3, 10, 16, 25) and further subdivided by Cap and Size code.

□ : Enter the appropriate terminal code.


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw



# SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS Low impedance, 7000 to 8000-hours-life, 105°C

## New! Alchip™-MZE Series

- Endurance : 7,000 to 8,000 hours at 105°C
- Low impedance
- Rated voltage range : 6.3 to 50V
- Nominal capacitance range : 10 to 470μF
- Suitable for high reliability products
- RoHS Compliant




### ◆ SPECIFICATIONS


Items	Characteristics	
Category	-25 to +105°C	
Temperature Range		
Rated Voltage Range	6.3 to 50V <sub>dc</sub>	
Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)	
Leakage Current	I=0.01CV or 3μA, whichever is greater (at 20°C, after 2 minutes)	
	Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V)	
Dissipation Factor (tanδ)	Rated voltage (V <sub>dc</sub> )	6.3V 10V 16V 25V 35V 50V
	tanδ (Max.)	0.32 0.28 0.26 0.16 0.14 0.14 (at 20°C, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V <sub>dc</sub> )	6.3V 10V 16V 25V 35V 50V
	Z(-10°C)/Z(+20°C)	4 3 2 2 2 2 (at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for specified time at 105°C.	
	Time	E73 & F73 : 7,000 hours F90 to JA0 : 8,000 hours
	Capacitance change	≤±30% of the initial value
	D.F. (tanδ)	≤300% of the initial specified value
	Leakage current	≤The initial specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.	
	Capacitance change	≤±30% of the initial value
	D.F. (tanδ)	≤300% of the initial specified value
	Leakage current	≤The initial specified value

### ◆ DIMENSIONS [mm]

● Terminal Code : A

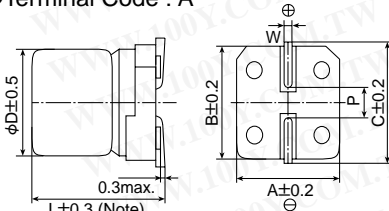

### ◆ PART NUMBERING SYSTEM

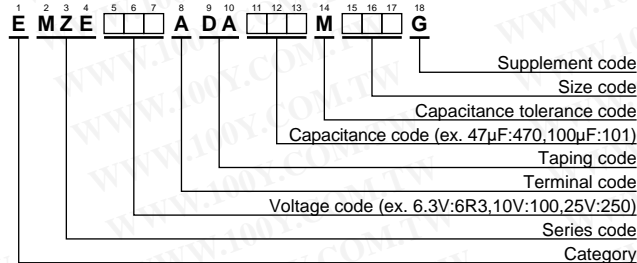

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Size code	D	L	A	B	C	W	P
E73	5	7.0	5.3	5.3	5.9	0.5 to 0.8	1.4
F73	6.3	7.0	6.6	6.6	7.2	0.5 to 0.8	1.9
F90	6.3	8.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

### ◆ MARKING

EX) 16V47μF



● Rated voltage code

Rated voltage	6.3	10	16	25	35	50
Code	j	A	C	E	V	H

### ◆ STANDARD RATINGS

VV (V <sub>dc</sub> )	Cap (μF)	Size code	Impedance (Ω <sub>max</sub> /20°C, 100kHz)	Rated ripple current (mA <sub>RMS</sub> /105°C, 100kHz)	Part No.	VV (V <sub>dc</sub> )	Cap (μF)	Size code	Impedance (Ω <sub>max</sub> /20°C, 100kHz)	Rated ripple current (mA <sub>RMS</sub> /105°C, 100kHz)	Part No.	
6.3	47	E73	2.2	95	EMZE6R3ADA470ME73G	25	33	F73	1.1	140	EMZE250ADA330MF73G	
	100	F73	1.1	140	EMZE6R3ADA101MF73G		47	F73	1.1	140	EMZE250ADA470MF73G	
	220	F90	1.0	230	EMZE6R3ADA221MF90G		100	F90	1.0	230	EMZE250ADA101MF90G	
	330	F90	1.0	230	EMZE6R3ADA331MF90G		220	HA0	0.22	600	EMZE250ADA221MHA0G	
	470	HA0	0.22	600	EMZE6R3ADA471MHA0G		330	JA0	0.16	850	EMZE250ADA331MJA0G	
10	33	E73	2.2	95	EMZE100ADA330ME73G	35	10	E73	2.2	95	EMZE350ADA100ME73G	
	150	F73	1.1	140	EMZE100ADA151MF73G		10	F73	1.1	140	EMZE350ADA100MF73G	
16	22	E73	2.2	95	EMZE160ADA220ME73G		22	E73	2.2	95	EMZE350ADA220ME73G	
	47	F73	1.1	140	EMZE160ADA470MF73G		22	F73	1.1	140	EMZE350ADA220MF73G	
	100	F73	1.1	140	EMZE160ADA101MF73G		33	F90	1.0	230	EMZE350ADA330MF90G	
	150	F90	1.0	230	EMZE160ADA151MF90G		47	F90	1.0	230	EMZE350ADA470MF90G	
	220	F90	1.0	230	EMZE160ADA221MF90G		100	HA0	0.22	600	EMZE350ADA101MHA0G	
	330	HA0	0.22	600	EMZE160ADA331MHA0G		220	JA0	0.16	850	EMZE350ADA221MJA0G	
25	470	JA0	0.16	850	EMZE160ADA471MJA0G		50	47	HA0	0.53	350	EMZE500ADA470MHA0G
	22	E73	2.2	95	EMZE250ADA220ME73G			100	JA0	0.35	670	EMZE500ADA101MJA0G



# SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS Low impedance, 5000-hours-life, 105°C

## Alchip™-MZD Series

- Endurance : 5,000 hours at 105°C
- Low impedance
- Rated voltage range : 6.3 to 50V
- Nominal capacitance range : 10 to 470μF
- Suitable for high reliability products
- RoHS Compliant




勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### ◆ SPECIFICATIONS

Items	Characteristics
Category Temperature Range	-25 to +105°C
Rated Voltage Range	6.3 to 50V <sub>dc</sub>
Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)
Leakage Current	I=0.01CV or 3μA, whichever is greater Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C, after 2 minutes)
Dissipation Factor (tanδ)	Rated voltage (V <sub>dc</sub> ) 6.3V 10V 16V 25V 35V 50V tanδ (Max.) 0.32 0.28 0.26 0.16 0.14 0.14 (at 20°C, 120Hz)
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V <sub>dc</sub> ) 6.3V 10V 16V 25V 35V 50V Z(-10°C)/Z(+20°C) 4 3 2 2 2 2 (at 120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 5,000 hours at 105°C. Capacitance change ≤±30% of the initial value D.F. (tanδ) ≤300% of the initial specified value Leakage current ≤The initial specified value
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4. Capacitance change ≤±30% of the initial value D.F. (tanδ) ≤300% of the initial specified value Leakage current ≤The initial specified value


### ◆ DIMENSIONS [mm]

● Terminal Code : A

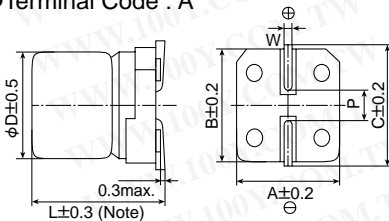

Note : L±0.5 for HA0 and JA0

### ◆ PART NUMBERING SYSTEM

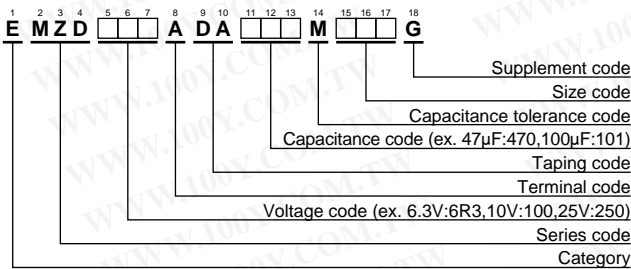

Size code	D	L	A	B	C	W	P
E73	5	7.0	5.3	5.3	5.9	0.5 to 0.8	1.4
F73	6.3	7.0	6.6	6.6	7.2	0.5 to 0.8	1.9
F90	6.3	8.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

Please refer to "Product code guide (surface mount type)"

### ◆ MARKING

EX) 16V47μF



● Rated voltage code


Rated voltage	6.3	10	16	25	35	50
Code	j	A	C	E	V	H

### ◆ STANDARD RATINGS

WV (V <sub>dc</sub> )	Cap (μF)	Size code	Impedance (Ω <sub>max</sub> /20°C, 100kHz)	Rated ripple current (mA <sub>RMS</sub> /105°C, 100kHz)	Part No.
6.3	47	E73	2.2	95	EMZD6R3ADA470ME73G
	100	F73	1.1	140	EMZD6R3ADA101MF73G
	220	F90	1.0	230	EMZD6R3ADA221MF90G
	330	F90	1.0	230	EMZD6R3ADA331MF90G
	470	HA0	0.22	600	EMZD6R3ADA471MHA0G
10	33	E73	2.2	95	EMZD100ADA330ME73G
	150	F73	1.1	140	EMZD100ADA151MF73G
	22	E73	2.2	95	EMZD160ADA220ME73G
16	47	F73	1.1	140	EMZD160ADA470MF73G
	100	F73	1.1	140	EMZD160ADA101MF73G
	150	F90	1.0	230	EMZD160ADA151MF90G
	220	F90	1.0	230	EMZD160ADA221MF90G
	330	HA0	0.22	600	EMZD160ADA331MHA0G
	470	HA0	0.22	600	EMZD160ADA471MHA0G
25	22	E73	2.2	95	EMZD250ADA220ME73G
	33	F73	1.1	140	EMZD250ADA330MF73G
25	47	F73	1.1	140	EMZD250ADA470MF73G
	100	F90	1.0	230	EMZD250ADA101MF90G
	220	HA0	0.22	600	EMZD250ADA221MHA0G
	330	HA0	0.22	600	EMZD250ADA331MHA0G
	470	JA0	0.16	850	EMZD250ADA471MJA0G
	10	E73	2.2	95	EMZD350ADA100ME73G
	10	F73	1.1	140	EMZD350ADA100MF73G
35	22	E73	2.2	95	EMZD350ADA220ME73G
	22	F73	1.1	140	EMZD350ADA220MF73G
	33	F90	1.0	230	EMZD350ADA330MF90G
	47	F90	1.0	230	EMZD350ADA470MF90G
	220	HA0	0.22	600	EMZD350ADA221MHA0G
50	330	JA0	0.16	850	EMZD350ADA331MJA0G
	47	HA0	0.53	350	EMZD500ADA470MHA0G
	100	HA0	0.53	350	EMZD500ADA101MHA0G
	220	JA0	0.35	670	EMZD500ADA221MJA0G

Alchip™-**MLA** Series

- Low impedance, long life
- Rated voltage 6.3 to 50V, Capacitance 10 to 1,000μF
- Case size φ5×5.8L to φ10×10L
- Suitable for applications requiring long life and low impedance such as equipment in continuous operation, industrial applications, etc.
- RoHS Compliant




◆ **SPECIFICATIONS**

Items	Characteristics						
Category	-40 to +105°C						
Temperature Range							
Rated Voltage Range	6.3 to 50V <sub>dc</sub>						
Capacitance Tolerance	±20%(M) (20°C, 120Hz)						
Leakage Current	I=0.01CV or 3μA, whichever is greater Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)						
Dissipation Factor (tanδ)	Rated voltage(V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V
	E61 to F61	0.28	0.24	0.22	0.16	0.13	0.12
	F80	0.32	0.27	0.24	0.16	0.13	0.12
	HA0 to JA0	0.28	0.24	0.22	0.16	0.13	0.12
Low Temperature Characteristics (Max. impedance Ratio)	Rated voltage(V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2
	Z(-40°C)/Z(+20°C)	10	7	5	3	3	3
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 3,000 hours at 105°C.						
	Capacitance change	≤±30% of the initial value					
	D.F. (tanδ)	≤300% of the initial specified value					
	Leakage current	≤The initial specified value					
Shelf life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.						
	Capacitance change	≤±30% of the initial value					
	D.F. (tanδ)	≤300% of the initial specified value					
	Leakage current	≤The initial specified value					

◆ **DIMENSIONS [mm]**

● Terminal Code : A

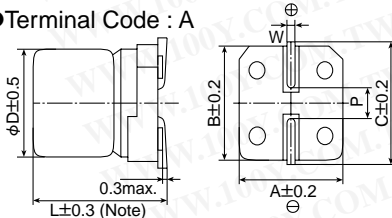

Note : L±0.5 for HA0 and JA0


Case code	D	L	A	B	C	W	P
E61	5	5.8	5.3	5.3	5.9	0.5 to 0.8	1.4
F61	6.3	5.8	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

◆ **MARKING**

EX) 16V100μF



◆ **PART NUMBERING SYSTEM**

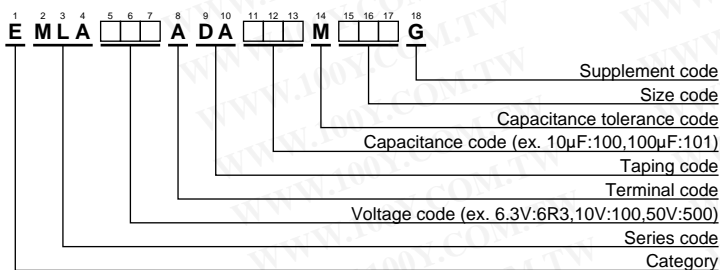

Please refer to "Product code guide (surface mount type)"

◆ **RATED VOLTAGE SYMBOL**

Rated voltage (V <sub>dc</sub> )	Symbol
6.3	j
10	A
16	C
25	E
35	V
50	H

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw





Alchip™-MLA Series

◆STANDARD RATINGS


WV (Vdc)	Cap (μF)	Size code	tanδ	Impedance (Ωmax/20°C, 100kHz)	Rated ripple current (mA <sub>rms</sub> /105°C, 100kHz)	Part No.	WV (Vdc)	Cap (μF)	Size code	tanδ	Impedance (Ωmax/20°C, 100kHz)	Rated ripple current (mA <sub>rms</sub> /105°C, 100kHz)	Part No.
6.3	47	E61	0.28	1.30	95	EMLA6R3ADA470ME61G	25	33	F61	0.16	0.70	140	EMLA250ADA330MF61G
	100	F61	0.28	0.70	140	EMLA6R3ADA101MF61G		47	F61	0.16	0.70	140	EMLA250ADA470MF61G
	150	F61	0.28	0.70	140	EMLA6R3ADA151MF61G		47	F80	0.16	0.70	230	EMLA250ADA470MF80G
	220	F80	0.32	0.70	230	EMLA6R3ADA221MF80G		100	F80	0.16	0.70	230	EMLA250ADA101MF80G
	330	F80	0.32	0.70	230	EMLA6R3ADA331MF80G		100	HA0	0.16	0.16	600	EMLA250ADA101MHA0G
	330	HA0	0.28	0.16	600	EMLA6R3ADA331MHA0G		150	HA0	0.16	0.16	600	EMLA250ADA151MHA0G
	470	HA0	0.28	0.16	600	EMLA6R3ADA471MHA0G		220	HA0	0.16	0.16	600	EMLA250ADA221MHA0G
	1,000	JA0	0.28	0.08	850	EMLA6R3ADA102MJA0G		330	HA0	0.16	0.16	600	EMLA250ADA331MHA0G
10	33	E61	0.24	1.30	95	EMLA100ADA330ME61G	330	JA0	0.16	0.08	850	EMLA250ADA331MJA0G	
	47	F61	0.24	0.70	140	EMLA100ADA470MF61G	470	JA0	0.16	0.08	850	EMLA250ADA471MJA0G	
	100	F61	0.24	0.70	140	EMLA100ADA101MF61G	35	10	E61	0.13	1.30	95	EMLA350ADA100ME61G
	150	F61	0.24	0.70	140	EMLA100ADA151MF61G		22	F61	0.13	0.70	140	EMLA350ADA220MF61G
	220	F80	0.27	0.70	230	EMLA100ADA221MF80G		33	F61	0.13	0.70	140	EMLA350ADA330MF61G
	220	HA0	0.24	0.16	600	EMLA100ADA221MHA0G		33	F80	0.13	0.70	230	EMLA350ADA330MF80G
	330	HA0	0.24	0.16	600	EMLA100ADA331MHA0G		47	F80	0.13	0.70	230	EMLA350ADA470MF80G
470	HA0	0.24	0.16	600	EMLA100ADA471MHA0G	100		F80	0.13	0.70	230	EMLA350ADA101MF80G	
22	E61	0.22	1.30	95	EMLA160ADA220ME61G	100		HA0	0.13	0.16	600	EMLA350ADA101MHA0G	
16	33	F61	0.22	0.70	140	EMLA160ADA330MF61G	150	HA0	0.13	0.16	600	EMLA350ADA151MHA0G	
	47	F61	0.22	0.70	140	EMLA160ADA470MF61G	220	HA0	0.13	0.16	600	EMLA350ADA221MHA0G	
	100	F61	0.22	0.70	140	EMLA160ADA101MF61G	220	JA0	0.13	0.08	850	EMLA350ADA221MJA0G	
	100	F80	0.24	0.70	230	EMLA160ADA101MF80G	330	JA0	0.13	0.08	850	EMLA350ADA331MJA0G	
	150	F80	0.24	0.70	230	EMLA160ADA151MF80G	50	10	F61	0.12	2.00	70	EMLA500ADA100MF61G
	220	F80	0.24	0.70	230	EMLA160ADA221MF80G		22	F61	0.12	2.00	70	EMLA500ADA220MF61G
	220	HA0	0.22	0.16	600	EMLA160ADA221MHA0G		33	F80	0.12	1.60	100	EMLA500ADA330MF80G
	330	HA0	0.22	0.16	600	EMLA160ADA331MHA0G		47	F80	0.12	1.60	100	EMLA500ADA470MF80G
	470	HA0	0.22	0.16	600	EMLA160ADA471MHA0G		47	HA0	0.12	0.34	350	EMLA500ADA470MHA0G
	470	JA0	0.22	0.08	850	EMLA160ADA471MJA0G		100	HA0	0.12	0.34	350	EMLA500ADA101MHA0G
10	E61	0.16	1.30	95	EMLA250ADA100ME61G	100		JA0	0.12	0.18	670	EMLA500ADA101MJA0G	
25	22	E61	0.16	1.30	95	EMLA250ADA220ME61G		150	JA0	0.12	0.18	670	EMLA500ADA151MJA0G
	22	F61	0.16	0.70	140	EMLA250ADA220MF61G		220	JA0	0.12	0.18	670	EMLA500ADA221MJA0G

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



### Alchip™-MVJ Series

- Endurance : 2,000 hours at 105°C
- Solvent resistant type
- RoHS Compliant




### ◆ SPECIFICATIONS

Items	Characteristics							
<b>Category</b> Temperature Range	-40 to +105°C							
<b>Rated Voltage Range</b>	6.3 to 50V <sub>dc</sub>							
<b>Capacitance Tolerance</b>	±20% (M) (at 20°C, 120Hz)							
<b>Leakage Current</b>	I=0.01CV or 3μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)							
<b>Dissipation Factor (tanδ)</b>	Rated voltage (V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V	(at 20°C, 120Hz)
	tanδ (Max.)	0.30	0.24	0.20	0.16	0.14	0.12	
<b>Low Temperature Characteristics (Max. Impedance Ratio)</b>	Rated voltage (V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V	(at 120Hz)
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	
	Z(-40°C)/Z(+20°C)	12	8	6	4	3	3	
<b>Endurance</b>	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 105°C.							
	Rated voltage	6.3V <sub>dc</sub>			10 & 16V <sub>dc</sub>		25 to 50V <sub>dc</sub>	
	Capacitance change	≤±30% of the initial value			≤±25% of the initial value		≤±20% of the initial value	
	D.F. (tanδ)	≤300% of the initial specified value			≤300% of the initial specified value		≤200% of the initial specified value	
	Leakage current	The initial specified value			≤The initial specified value		≤The initial specified value	
<b>Shelf Life</b>	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.							
	Rated voltage	6.3V <sub>dc</sub>			10 & 16V <sub>dc</sub>		25 to 50V <sub>dc</sub>	
	Capacitance change	≤±30% of the initial value			≤±25% of the initial value		≤±20% of the initial value	
	D.F. (tanδ)	≤300% of the initial specified value			≤300% of the initial specified value		≤200% of the initial specified value	
	Leakage current	≤The initial specified value			≤The initial specified value		≤The initial specified value	


### ◆ DIMENSIONS [mm]

● Terminal Code : A

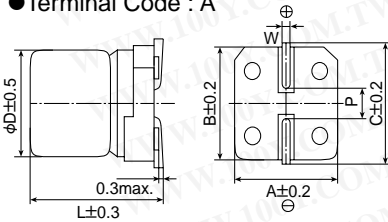

Size code	D	L	A	B	C	W	P
D60	4	5.7	4.3	4.3	5.1	0.5 to 0.8	1.0
E60	5	5.7	5.3	5.3	5.9	0.5 to 0.8	1.4
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9

### ◆ PART NUMBERING SYSTEM

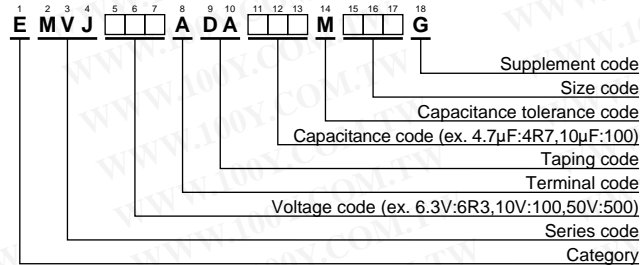

Please refer to "Product code guide (surface mount type)"

### ◆ MARKING

EX) 6.3V100μF



### ◆ STANDARD RATINGS

WV (V <sub>dc</sub> )	Cap (μF)	Size code	tanδ	Rated ripple current (mArms/105°C,120Hz)	Part No.	WV (V <sub>dc</sub> )	Cap (μF)	Size code	tanδ	Rated ripple current (mArms/105°C,120Hz)	Part No.
6.3	22	D60	0.30	21	EMVJ6R3ADA220MD60G	35	22	F60	0.14	40	EMVJ350ADA220MF60G
	47	E60	0.30	36	EMVJ6R3ADA470ME60G		0.10	D60	0.12	1.3	EMVJ500ADAR10MD60G
	100	F60	0.30	56	EMVJ6R3ADA101MF60G		0.22	D60	0.12	2.6	EMVJ500ADAR22MD60G
10	33	E60	0.24	34	EMVJ100ADA330ME60G		0.33	D60	0.12	3.2	EMVJ500ADAR33MD60G
	10	D60	0.20	16	EMVJ160ADA100MD60G		0.47	D60	0.12	3.8	EMVJ500ADAR47MD60G
	22	E60	0.20	30	EMVJ160ADA220ME60G		1.0	D60	0.12	5.6	EMVJ500ADA1R0MD60G
16	47	F60	0.20	48	EMVJ160ADA470MF60G		2.2	D60	0.12	10	EMVJ500ADA2R2MD60G
	25	F60	0.16	45	EMVJ250ADA330MF60G		3.3	D60	0.12	14	EMVJ500ADA3R3MD60G
	4.7	D60	0.14	15	EMVJ350ADA4R7MD60G		4.7	E60	0.12	19	EMVJ500ADA4R7ME60G
35	10	E60	0.14	25	EMVJ350ADA100ME60G		10	F60	0.12	29	EMVJ500ADA100MF60G

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)



# SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS


7000 to 8000-hours-life, 105°C

## New! Alchip™-MLE Series

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw



- Endurance : 7,000 to 8,000 hours at 105°C
- Rated voltage range : 6.3 to 50V
- Nominal capacitance range : 0.1 to 1,000µF
- Suitable for high reliability products
- RoHS Compliant




### ◆SPECIFICATIONS

Items	Characteristics						
Category Temperature Range	-25 to +105°C						
Rated Voltage Range	6.3 to 50V <sub>dc</sub>						
Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)						
Leakage Current	I=0.03CV or 4µA, whichever is greater Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V) (at 20°C, after 2 minutes)						
Dissipation Factor (tanδ)	Rated voltage (V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V
	tanδ (Max.)	0.32	0.28	0.26	0.16	0.14	0.14
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage(V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V
	Z(-10°C)/Z(+20°C)	4	3	2	2	2	2
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for specified time at 105°C.						
	Time	D73 to F73 : 7,000 hours F90 to JA0 : 8,000 hours					
	Capacitance change	≤±30% of the initial value					
	D.F. (tanδ)	≤300% of the initial specified value					
	Leakage current	≤The initial specified value					
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.						
	Capacitance change	≤±30% of the initial value					
	D.F. (tanδ)	≤300% of the initial specified value					
	Leakage current	≤The initial specified value					


### ◆DIMENSIONS [mm]

●Terminal Code : A

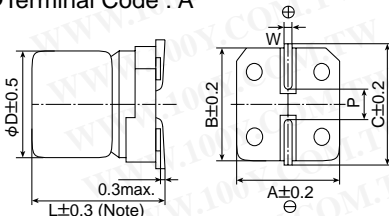

Note : L±0.5 for HA0 and JA0

### ◆PART NUMBERING SYSTEM

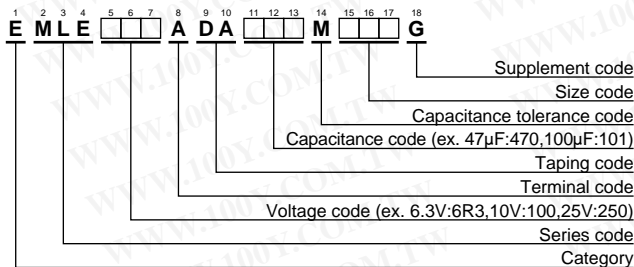

Size code	D	L	A	B	C	W	P
D73	4	7.0	4.3	4.3	5.1	0.5 to 0.8	1.0
E73	5	7.0	5.3	5.3	5.9	0.5 to 0.8	1.4
F73	6.3	7.0	6.6	6.6	7.2	0.5 to 0.8	1.9
F90	6.3	8.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

### ◆MARKING

EX) 16V47µF



●Rated voltage code


Rated voltage	6.3	10	16	25	35	50
Code	j	A	C	E	V	H

### ◆STANDARD RATINGS

WV (V <sub>dc</sub> )	Cap (µF)	Size code	Rated ripple current (mArms/105°C, 120Hz)	Part No.	WV (V <sub>dc</sub> )	Cap (µF)	Size code	Rated ripple current (mArms/105°C, 120Hz)	Part No.
6.3	22	D73	22	EMLE6R3ADA220MD73G	35	0.22	D73	2.6	EMLE350ADAR22MD73G
	47	E73	36	EMLE6R3ADA470ME73G		0.33	D73	3.2	EMLE350ADAR33MD73G
	100	F73	60	EMLE6R3ADA101MF73G		0.47	D73	3.8	EMLE350ADAR47MD73G
	220	F90	101	EMLE6R3ADA221MF90G		1.0	D73	6.2	EMLE350ADA1R0MD73G
	330	HA0	160	EMLE6R3ADA331MHA0G		2.2	D73	11	EMLE350ADA2R2MD73G
	1,000	JA0	313	EMLE6R3ADA102MJA0G		3.3	D73	14	EMLE350ADA3R3MD73G
10	33	E73	35	EMLE100ADA330ME73G	50	4.7	D73	15	EMLE350ADA4R7MD73G
	220	HA0	141	EMLE100ADA221MHA0G		4.7	E73	19	EMLE350ADA4R7ME73G
16	10	D73	18	EMLE160ADA100MD73G		10	E73	25	EMLE350ADA100ME73G
	22	E73	30	EMLE160ADA220ME73G		10	F73	30	EMLE350ADA100MF73G
	47	F73	50	EMLE160ADA470MF73G		22	F73	42	EMLE350ADA220MF73G
	100	F90	81	EMLE160ADA101MF90G		22	F90	49	EMLE350ADA220MF90G
25	470	JA0	254	EMLE160ADA471MJA0G		33	F90	57	EMLE350ADA330MF90G
	33	F73	48	EMLE250ADA330MF73G		220	JA0	216	EMLE350ADA221MJA0G
	47	F90	63	EMLE250ADA470MF90G		33	HA0	77	EMLE500ADA330MHA0G
35	100	HA0	116	EMLE250ADA101MHA0G		47	HA0	92	EMLE500ADA470MHA0G
	0.10	D73	1.0	EMLE350ADAR10MD73G	100	JA0	151	EMLE500ADA101MJA0G	

**Alchip™-MLD Series**

- Endurance : 5,000 hours at 105°C
- Rated voltage range : 6.3 to 50V
- Nominal capacitance range : 0.1 to 1,000µF
- Suitable for high reliability products
- RoHS Compliant




**◆SPECIFICATIONS**

Items	Characteristics						
Category Temperature Range	-25 to +105°C						
Rated Voltage Range	6.3 to 50V <sub>dc</sub>						
Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)						
Leakage Current	I=0.03CV or 4µA, whichever is greater Where, I : Max. leakage current (µA), C : Nominal capacitance (µF), V : Rated voltage (V) (at 20°C, after 2 minutes)						
Dissipation Factor (tanδ)	Rated voltage (V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V
	tanδ (Max.)	0.32	0.28	0.26	0.16	0.14	0.14
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage(V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V
	Z(-10°C)/Z(+20°C)	4	3	2	2	2	2
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 5,000 hours at 105°C.						
	Capacitance change	≤±30% of the initial value					
	D.F. (tanδ)	≤300% of the initial specified value					
	Leakage current	≤The initial specified value					
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.						
	Capacitance change	≤±30% of the initial value					
	D.F. (tanδ)	≤300% of the initial specified value					
	Leakage current	≤The initial specified value					

勝特力材料 866-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw

**◆DIMENSIONS [mm]**


●Terminal Code : A

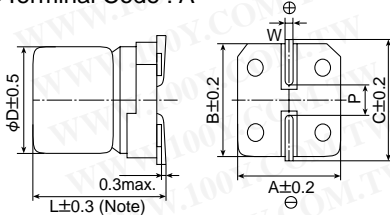

Note : L±0.5 for HA0 and JA0

Size code	D	L	A	B	C	W	P
D73	4	7.0	4.3	4.3	5.1	0.5 to 0.8	1.0
E73	5	7.0	5.3	5.3	5.9	0.5 to 0.8	1.4
F73	6.3	7.0	6.6	6.6	7.2	0.5 to 0.8	1.9
F90	6.3	8.7	6.6	6.6	7.2	0.5 to 0.8	1.9
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

**◆PART NUMBERING SYSTEM**

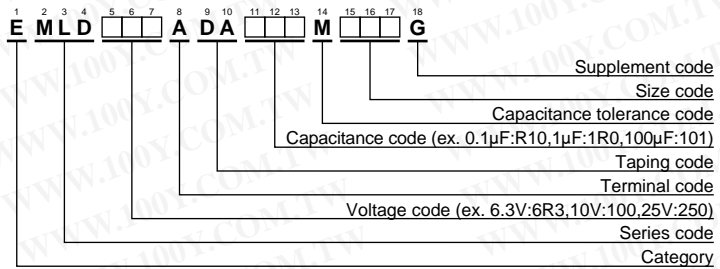

Please refer to "Product code guide (surface mount type)"

**◆MARKING**

EX) 16V47µF



●Rated voltage code

Rated voltage	6.3	10	16	25	35	50
Code	j	A	C	E	V	H

**◆STANDARD RATINGS**

WV (Vdc)	Cap (µF)	Size code	tanδ	Rated ripple current (mArms/105°C, 120Hz)	Part No.	WV (Vdc)	Cap (µF)	Size code	tanδ	Rated ripple current (mArms/105°C, 120Hz)	Part No.
6.3	22	D73	0.32	22	EMLD6R3ADA220MD73G	35	0.1	D73	0.14	1.0	EMLD350ADAR10MD73G
	47	E73	0.32	36	EMLD6R3ADA470ME73G		0.22	D73	0.14	2.6	EMLD350ADAR22MD73G
	100	F73	0.32	60	EMLD6R3ADA101MF73G		0.33	D73	0.14	3.2	EMLD350ADAR33MD73G
	220	F90	0.32	101	EMLD6R3ADA221MF90G		0.47	D73	0.14	3.8	EMLD350ADAR47MD73G
	330	HA0	0.32	160	EMLD6R3ADA331MHA0G		1.0	D73	0.14	6.2	EMLD350ADA1R0MD73G
	1,000	JA0	0.32	313	EMLD6R3ADA102MJA0G		2.2	D73	0.14	11	EMLD350ADA2R2MD73G
10	33	E73	0.28	35	EMLD100ADA330ME73G	50	3.3	D73	0.14	14	EMLD350ADA3R3MD73G
	220	HA0	0.28	141	EMLD100ADA221MHA0G		4.7	D73	0.14	15	EMLD350ADA4R7MD73G
	10	D73	0.26	18	EMLD160ADA100MD73G		4.7	E73	0.14	19	EMLD350ADA4R7ME73G
16	22	E73	0.26	30	EMLD160ADA220ME73G		10	E73	0.14	25	EMLD350ADA100ME73G
	47	F73	0.26	50	EMLD160ADA470MF73G		10	F73	0.14	30	EMLD350ADA100MF73G
	100	F90	0.26	81	EMLD160ADA101MF90G		22	F73	0.14	42	EMLD350ADA220MF73G
	470	JA0	0.26	254	EMLD160ADA471MJA0G		22	F90	0.14	49	EMLD350ADA220MF90G
25	33	F73	0.16	48	EMLD250ADA330MF73G		33	F90	0.14	57	EMLD350ADA330MF90G
	47	F90	0.16	63	EMLD250ADA470MF90G		220	JA0	0.14	216	EMLD350ADA221MJA0G
	100	HA0	0.16	116	EMLD250ADA101MHA0G		33	HA0	0.14	77	EMLD500ADA330MHA0G
							47	HA0	0.14	92	EMLD500ADA470MHA0G
							100	JA0	0.14	151	EMLD500ADA101MJA0G

**Alchip™-MVL Series**

- Endurance : 3,000 to 5,000 hours at 105°C
- Suitable for applications requiring long life such as continuously operating equipment, industrial applications, etc
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant

**MVL**

↑ Longer life  
MVJ




**◆SPECIFICATIONS**

Items	Characteristics						
Category	-40 to +105°C						
Temperature Range							
Rated Voltage Range	6.3 to 50V <sub>dc</sub>						
Capacitance Tolerance	±20%(M) (at 20°C, 120Hz)						
Leakage Current	I=0.03CV or 4μA, whichever is greater Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C, after 2 minutes)						
Dissipation Factor (tanδ)	Rated voltage (V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V
	Max. tanδ	0.28	0.24	0.20	0.16	0.13	0.12
Low Temperature Characteristics (Max. impedance Ratio)	Rated voltage (V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2
	Z(-40°C)/Z(+20°C)	10	7	5	3	3	3
Endurance	After the capacitors are subjected to the rated DC voltage for 3,000 hours (HA0 & JA0 sizes 5,000 hours) at 105°C, the following specifications shall be satisfied when the capacitors are restored to 20°C.						
	Capacitance change	≤±30% of the initial value					
	D.F. (tanδ)	≤300% of the initial specified value					
	Leakage current	≤The initial specified value					
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.						
	Capacitance change	≤±30% of the initial value					
	D.F. (tanδ)	≤300% of the initial specified value					
	Leakage current	≤The initial specified value					

**◆DIMENSIONS [mm]**


●Terminal Code : A

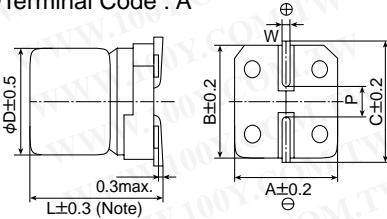

Note : L±0.5 for H63 to JA0


Size code	D	L	A	B	C	W	P
D60	4	5.7	4.3	4.3	5.1	0.5 to 0.8	1.0
E60	5	5.7	5.3	5.3	5.9	0.5 to 0.8	1.4
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
H63	8	6.3	8.3	8.3	9.0	0.5 to 0.8	2.3
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

**◆PART NUMBERING SYSTEM**

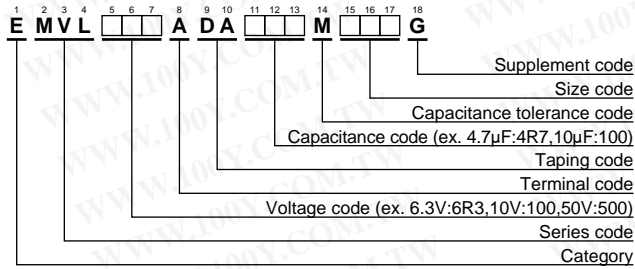

Please refer to "Product code guide (surface mount type)"

**◆MARKING**



勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**◆STANDARD RATINGS**

WV (V <sub>dc</sub> )	Cap (μF)	Size code	tanδ	Rated ripple current (mA <sub>rms</sub> /105°C, 120Hz)	Part No.	
6.3	22	D60	0.28	22	EMVL6R3ADA220MD60G	
	47	E60	0.28	36	EMVL6R3ADA470ME60G	
	100	F60	0.28	60	EMVL6R3ADA101MF60G	
	220	F80	0.28	101	EMVL6R3ADA221MF80G	
	330	HA0	0.28	160	EMVL6R3ADA331MHA0G	
	1,000	JA0	0.28	313	EMVL6R3ADA102MJA0G	
10	33	E60	0.24	35	EMVL100ADA330ME60G	
	220	HA0	0.24	141	EMVL100ADA221MHA0G	
	10	D60	0.20	18	EMVL160ADA100MD60G	
16	22	E60	0.20	30	EMVL160ADA220ME60G	
	47	F60	0.20	50	EMVL160ADA470MF60G	
	100	F80	0.20	81	EMVL160ADA101MF80G	
	470	JA0	0.20	254	EMVL160ADA471MJA0G	
	25	33	F60	0.16	48	EMVL250ADA330MF60G
47		F80	0.16	63	EMVL250ADA470MF80G	
100		HA0	0.16	116	EMVL250ADA101MHA0G	
330		JA0	0.16	238	EMVL250ADA331MJA0G	
35		4.7	D60	0.13	15	EMVL350ADA4R7MD60G
	10	E60	0.13	25	EMVL350ADA100ME60G	
	22	F60	0.13	42	EMVL350ADA220MF60G	
	33	F80	0.13	57	EMVL350ADA330MF80G	
	220	JA0	0.13	216	EMVL350ADA221MJA0G	
	50	0.10	D60	0.12	1.0	EMVL500ADAR10MD60G
		0.22	D60	0.12	2.6	EMVL500ADAR22MD60G
		0.33	D60	0.12	3.2	EMVL500ADAR33MD60G
		0.47	D60	0.12	3.8	EMVL500ADAR47MD60G
		1.0	D60	0.12	6.2	EMVL500ADA1R0MD60G
2.2		D60	0.12	11	EMVL500ADA2R2MD60G	
3.3		D60	0.12	14	EMVL500ADA3R3MD60G	
4.7		E60	0.12	19	EMVL500ADA4R7ME60G	
10		F60	0.12	30	EMVL500ADA100MF60G	
22		F80	0.12	49	EMVL500ADA220MF80G	
100	33	HA0	0.12	77	EMVL500ADA330MHA0G	
	47	HA0	0.12	92	EMVL500ADA470MHA0G	
	100	JA0	0.12	151	EMVL500ADA101MJA0G	

**Alchip™ - MVH Series**

- Lower ESR, Higher ripple current
- Endurance : 1,000 to 5,000 hours at 125°C
- Suitable to fit for automotive equipment
- Solvent resistant type (10 to 50V)
- RoHS Compliant

**MVH**

↑ 125°C  
Expanded case sizes  
MVK




**◆ SPECIFICATIONS**


Items	Characteristics													
<b>Category</b>	-40 to +125°C													
<b>Temperature Range</b>	-40 to +125°C													
<b>Rated Voltage Range</b>	10 to 450V <sub>dc</sub>													
<b>Capacitance Tolerance</b>	±20% (M) (at 20°C, 120Hz)													
<b>Leakage Current</b>	Rated voltage (V <sub>dc</sub> )	10 to 100V <sub>dc</sub>						160 to 450V <sub>dc</sub>						
	F60 to JA0	I=0.01CV or 3μA, whichever is greater.						I=0.04CV+100						
	KE0 to MN0	I=0.03CV or 4μA, whichever is greater.												
Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)														
<b>Dissipation Factor (tanδ)</b>	Rated voltage (V <sub>dc</sub> )	10V	16V	25V	35V	50V	63V	80V	100V	160 to 250V	400 & 450V			
	tanδ (Max.)	F60 to JA0	0.24	0.20	0.16	0.14	0.14	0.12	0.12	0.10	—	—		
		KE0 to MN0	0.22	0.18	0.16	0.14	0.12	0.14	—	0.10	0.20	0.24		
When nominal capacitance exceeds 1,000μF, add 0.02 to the value above for each 1,000μF increase. (at 20°C, 120Hz)														
<b>Low Temperature Characteristics (Max. Impedance Ratio)</b>	Rated voltage (V <sub>dc</sub> )	10V	16V	25V	35V	50V	63V	80V	100V	160 to 250V	400 & 450V			
	F60 to JA0	Z(-25°C)/Z(+20°C)	3	2	2	2	2	2	2	2	—	—		
		Z(-40°C)/Z(+20°C)	6	4	4	3	3	3	3	3	—	—		
	KE0 to MN0	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2	—	2	3	6		
		Z(-40°C)/Z(+20°C)	8	6	4	3	3	3	—	3	6	10	(at 120Hz)	
The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for the specified time at 125°C.														
<b>Endurance</b>	Time	F60 to H63 (10 to 100V <sub>dc</sub> ) : 1,000hours HA0 to JA0 (10 to 100V <sub>dc</sub> ) : 2,000hours KE0 to MN0 (10 to 100V <sub>dc</sub> ) : 5,000hours KE0 to MN0 (160 to 450V <sub>dc</sub> ) : 2,000hours												
	Capacitance change	≤±30% of the initial value												
	D.F. (tanδ)	≤300% of the initial specified value												
	Leakage current	≤The initial specified value												
<b>Shelf Life</b>	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours (500 hours for 400 to 450V <sub>dc</sub> ) at 125°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.													
	Rated voltage(V <sub>dc</sub> )	10 to 50V <sub>dc</sub>						63 to 450V <sub>dc</sub>						
	Capacitance change	≤±30% of the initial value						≤±30% of the initial value						
	D.F. (tanδ)	≤300% of the initial specified value						≤300% of the initial specified value						
	Leakage current	≤The initial specified value						≤500% of the initial specified value						

**◆ DIMENSIONS [mm]**

- Terminal Code : A
- Size code : F60 to MN0

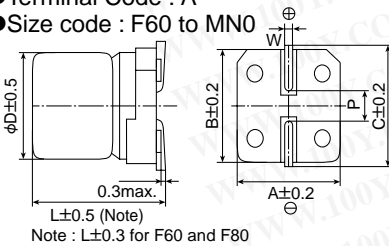

- Terminal Code : G
- Size code : LH0 to MN0

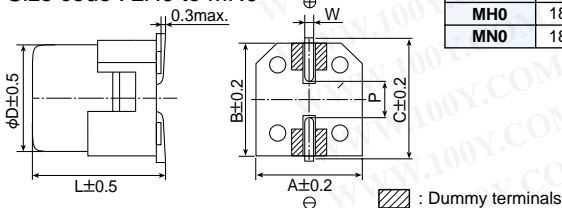

Size code	D	L	A	B	C	W	P
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9
F80	6.3	7.7	6.6	6.6	7.2	0.5 to 0.8	1.9
H63	8	6.3	8.3	8.3	9.0	0.5 to 0.8	2.3
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5
KE0	12.5	13.5	13.0	13.0	13.7	1.0 to 1.3	4.2
KG5	12.5	16.0	13.0	13.0	13.7	1.0 to 1.3	4.2
LH0	16	16.5	17.0	17.0	18.0	1.0 to 1.3	6.5
LN0	16	21.5	17.0	17.0	18.0	1.0 to 1.3	6.5
MH0	18	16.5	19.0	19.0	20.0	1.0 to 1.3	6.5
MN0	18	21.5	19.0	19.0	20.0	1.0 to 1.3	6.5

**◆ MARKING**

F60 to JA0  
EX) 35V47μF



KE0 to MN0  
EX) 16V1,000μF




勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Alchip™-MVH Series

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

◆PART NUMBERING SYSTEM

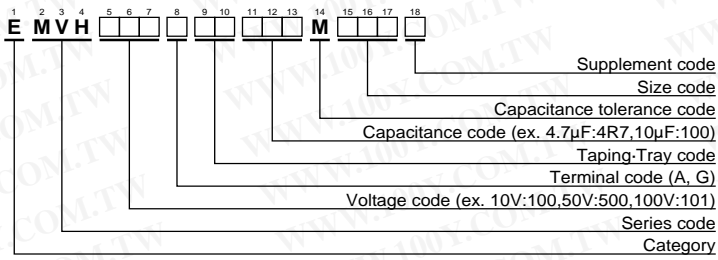

Please refer to "Product code guide (surface mount type)"

◆STANDARD RATINGS


□ is not solvent resistant (63 to 450Vdc).

VV (Vdc)	Cap (µF)	Size code	ESR (Ωmax/100kHz)		Rated ripple current (mArms/125°C)		Part No.	
			20°C	-40°C	100kHz	120Hz		
10	100	F80	0.90	14.0	110	—	EMVH100ADA101MF80G	
	100	H63	0.90	14.0	110	—	EMVH100ADA101MH63G	
	220	F80	0.90	14.0	110	—	EMVH100ADA221MF80G	
	220	H63	0.90	14.0	110	—	EMVH100ADA221MH63G	
	220	HA0	0.40	6.0	220	—	EMVH100ADA221MHA0G	
	330	HA0	0.40	6.0	220	—	EMVH100ADA331MHA0G	
	330	JA0	0.30	4.5	296	—	EMVH100ADA331MJA0G	
	470	JA0	0.30	4.5	296	—	EMVH100ADA471MJA0G	
	1,000	KE0	0.14	2.1	750	—	EMVH100ARA102MKE0S	
	2,200	LH0	0.10	1.5	1,000	—	EMVH100DA222MLH0S	
	2,200	MH0	0.10	1.5	1,200	—	EMVH100DA222MMH0S	
	3,300	MH0	0.10	1.5	1,200	—	EMVH100DA332MMH0S	
16	47	F60	1.6	24.0	69	—	EMVH160ADA470MF60G	
	100	HA0	0.40	6.0	220	—	EMVH160ADA101MHA0G	
	220	HA0	0.40	6.0	220	—	EMVH160ADA221MHA0G	
	220	JA0	0.30	4.5	296	—	EMVH160ADA221MJA0G	
	330	JA0	0.30	4.5	296	—	EMVH160ADA331MJA0G	
	470	KE0	0.14	2.1	750	—	EMVH160ARA471MKE0S	
	680	KE0	0.14	2.1	750	—	EMVH160ARA681MKE0S	
	680	LH0	0.10	1.5	1,000	—	EMVH160DA681MLH0S	
	1,000	MH0	0.10	1.5	1,200	—	EMVH160DA102MMH0S	
	2,200	MH0	0.10	1.5	1,200	—	EMVH160DA222MMH0S	
							EMVH160DA472MNN0S	
25	33	F60	1.6	24.0	69	—	EMVH250ADA330MF60G	
	47	F80	0.90	14.0	110	—	EMVH250ADA470MF80G	
	47	H63	0.90	14.0	110	—	EMVH250ADA470MH63G	
	100	F80	0.90	14.0	110	—	EMVH250ADA101MF80G	
	100	H63	0.90	14.0	110	—	EMVH250ADA101MH63G	
	100	HA0	0.40	6.0	220	—	EMVH250ADA101MHA0G	
	220	HA0	0.40	6.0	220	—	EMVH250ADA221MHA0G	
	220	JA0	0.30	4.5	296	—	EMVH250ADA221MJA0G	
	330	JA0	0.30	4.5	296	—	EMVH250ADA331MJA0G	
	330	KE0	0.14	2.1	750	—	EMVH250ARA331MKE0S	
	470	KE0	0.14	2.1	750	—	EMVH250ARA471MKE0S	
	470	LH0	0.10	1.5	1,000	—	EMVH250DA471MLH0S	
	680	LH0	0.10	1.5	1,000	—	EMVH250DA681MLH0S	
	680	MH0	0.10	1.5	1,200	—	EMVH250DA681MMH0S	
35	10	F60	1.6	24.0	69	—	EMVH350ADA100MF60G	
	22	F60	1.6	24.0	69	—	EMVH350ADA220MF60G	
	33	F80	0.90	14.0	110	—	EMVH350ADA330MF80G	
	33	H63	0.90	14.0	110	—	EMVH350ADA330MH63G	
	47	F80	0.90	14.0	110	—	EMVH350ADA470MF80G	
	47	H63	0.90	14.0	110	—	EMVH350ADA470MH63G	
	47	HA0	0.40	6.0	220	—	EMVH350ADA470MHA0G	
	100	HA0	0.40	6.0	220	—	EMVH350ADA101MHA0G	
	100	JA0	0.30	4.5	296	—	EMVH350ADA101MJA0G	
	220	JA0	0.30	4.5	296	—	EMVH350ADA221MJA0G	
	330	KE0	0.14	2.1	750	—	EMVH350ARA331MKE0S	
	330	LH0	0.10	1.5	1,000	—	EMVH350DA331MLH0S	
	470	KG5	0.11	1.5	900	—	EMVH350ARA471MKG5S	
	470	LH0	0.10	1.5	1,000	—	EMVH350DA471MLH0S	
50	680	MH0	0.10	1.5	1,200	—	EMVH350DA681MMH0S	
	10	F60	2.8	42.0	51	—	EMVH500ADA100MF60G	
	10	H63	1.6	30.0	83	—	EMVH500ADA100MH63G	
	22	F80	2.0	30.0	83	—	EMVH500ADA220MF80G	
	22	H63	1.6	30.0	83	—	EMVH500ADA220MH63G	
	50	33	F80	2.0	30.0	83	—	EMVH500ADA330MF80G
		33	H63	1.6	30.0	83	—	EMVH500ADA330MH63G
		33	HA0	0.70	11.0	160	—	EMVH500ADA330MHA0G
		47	HA0	0.70	11.0	160	—	EMVH500ADA470MHA0G
		47	JA0	0.50	7.5	247	—	EMVH500ADA470MJA0G
100		JA0	0.50	7.5	247	—	EMVH500ADA101MJA0G	
100		KE0	0.23	3.5	550	—	EMVH500ARA101MKE0S	
220		KE0	0.23	3.5	550	—	EMVH500ARA221MKE0S	
220		LH0	0.15	2.3	850	—	EMVH500DA221MLH0S	
330		KG5	0.18	2.7	700	—	EMVH500ARA331MKG5S	
63	330	LH0	0.15	2.3	850	—	EMVH500DA331MLH0S	
	470	MH0	0.15	2.3	920	—	EMVH500DA471MMH0S	
	10	F80	2.0	100	60	—	EMVH630ADA100MF80G	
	10	H63	2.0	110	60	—	EMVH630ADA100MH63G	
	22	HA0	0.70	35.0	100	—	EMVH630ADA220MHA0G	
	33	HA0	0.70	35.0	100	—	EMVH630ADA330MHA0G	
	33	JA0	0.50	25.0	170	—	EMVH630ADA330MJA0G	
	47	HA0	0.70	35.0	100	—	EMVH630ADA470MHA0G	
	47	JA0	0.50	25.0	170	—	EMVH630ADA470MJA0G	
	100	KE0	0.25	12.5	500	—	EMVH630ARA101MKE0S	
	220	KG5	0.20	10.0	600	—	EMVH630ARA221MKG5S	
80	330	LH0	0.18	9.0	820	—	EMVH630DA331MLH0S	
	470	LNO	0.11	5.5	1,100	—	EMVH630DA471MLN0S	
	10	HA0	0.75	50.0	70	—	EMVH800ADA100MHA0G	
	22	HA0	0.75	50.0	70	—	EMVH800ADA220MHA0G	
	22	JA0	0.55	35.0	115	—	EMVH800ADA220MJA0G	
	33	HA0	0.75	50.0	70	—	EMVH800ADA330MHA0G	
	33	JA0	0.55	35.0	115	—	EMVH800ADA330MJA0G	
	47	JA0	0.55	35.0	115	—	EMVH800ADA470MJA0G	
	10	HA0	0.75	50.0	70	—	EMVH101ADA100MHA0G	
100	22	JA0	0.55	35.0	115	—	EMVH101ADA220MJA0G	
	33	JA0	0.55	35.0	115	—	EMVH101ADA330MJA0G	
	47	KE0	0.33	16.5	450	—	EMVH101ARA470MKE0S	
	68	KG5	0.26	13.0	550	—	EMVH101ARA680MKG5S	
	100	LH0	0.24	12.0	650	—	EMVH101DA101MLH0S	
	220	MNO	0.16	8.0	950	—	EMVH101DA221MNN0S	
	10	KE0	—	—	—	100	EMVH161ARA100MKE0S	
	22	LH0	—	—	—	180	EMVH161DA220MLH0S	
	33	MH0	—	—	—	245	EMVH161DA330MMH0S	
160	68	MNO	—	—	—	380	EMVH161DA680MNN0S	
	10	KE0	—	—	—	100	EMVH201ARA100MKE0S	
	22	LH0	—	—	—	180	EMVH201DA220MLH0S	
	33	LNO	—	—	—	250	EMVH201DA330MLN0S	
200	33	MH0	—	—	—	245	EMVH201DA330MMH0S	
	47	MNO	—	—	—	315	EMVH201DA470MNN0S	
	10	KG5	—	—	—	110	EMVH251ARA100MKG5S	
	22	LNO	—	—	—	200	EMVH251DA220MLN0S	
250	22	MH0	—	—	—	205	EMVH251DA220MMH0S	
	33	MNO	—	—	—	260	EMVH251DA330MNN0S	
	4.7	KE0	—	—	—	70	EMVH401ARA4R7MKE0S	
400	6.8	LH0	—	—	—	100	EMVH401DA6R8MLH0S	
	10	LNO	—	—	—	140	EMVH401DA100MLN0S	
	10	MH0	—	—	—	135	EMVH401DA100MMH0S	
450	3.3	KG5	—	—	—	65	EMVH451ARA3R3MKG5S	
	4.7	LH0	—	—	—	85	EMVH451DA4R7MLH0S	
	10	MNO	—	—	—	145	EMVH451DA100MNN0S	

□ : Enter the appropriate terminal code.

**New!**  
**Alchip™-MHB Series**

- ESR : Less than MVH
- Endurance : 2,000 hours at 125°C
- Rated Voltage Range : 10 to 35V
- Nominal capacitance range : 47 to 330μF
- Solvent-proof type
- RoHS Compliant




**◆ SPECIFICATIONS**

Items	Characteristics				
<b>Category</b> Temperature Range	-40 to +125°C				
<b>Rated Voltage Range</b>	10 to 35V <sub>dc</sub>				
<b>Capacitance Tolerance</b>	±20%(M) (20°C, 120Hz)				
<b>Leakage Current</b>	I ≤ 0.01CV Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)				
<b>Dissipation Factor (tanδ)</b>	Rated voltage(V <sub>dc</sub> )	10V	16V	25V	35V
	tanδ (Max.)	0.24	0.20	0.16	0.14
		(20°C, 120Hz)			
<b>Low Temperature Characteristics (Max. impedance Ratio)</b>	Rated voltage(V <sub>dc</sub> )	10V	16V	25V	35V
	Z(-25°C)/Z(+20°C)	3	2	2	2
	Z(-40°C)/Z(+20°C)	4	3	3	3
		(120Hz)			
<b>Endurance</b>	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 125°C.				
	Capacitance change	≤ ±30% of the initial value			
	D.F. (tanδ)	≤ 300% of the initial specified value			
	Leakage current	≤ The initial specified value			
	ESR(-40°C, 400kHz)	HA0 : ≤ 6Ω			
<b>Shelf Life</b>	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours at 125°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.				
	Capacitance change	≤ ±30% of the initial value			
	D.F. (tanδ)	≤ 300% of the initial specified value			
	Leakage current	≤ The initial specified value			


**◆ DIMENSIONS [mm]**

● Terminal Code : A

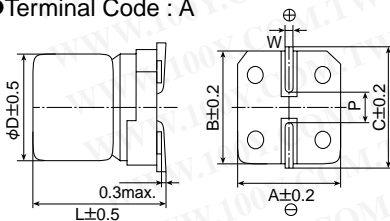

Size code	D	L	A	B	C	W	P
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1

**◆ PART NUMBERING SYSTEM**

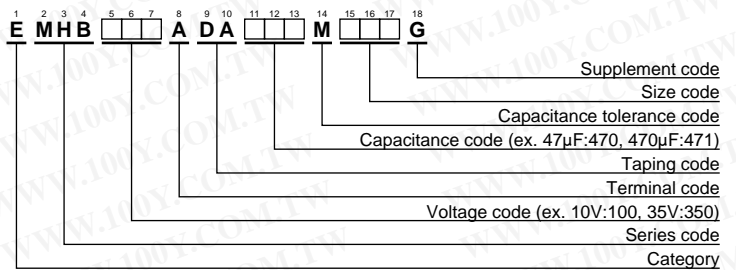

**◆ MARKING**

EX) 16V220μF



**◆ RATED VOLTAGE SYMBOL**

Rated voltage (V <sub>dc</sub> )	Symbol
10	A
16	C
25	E
35	V

**◆ STANDARD RATINGS**

WV(V <sub>dc</sub> )	Cap(μF)	Size code	ESR (Ω <sub>max</sub> /100k to 400kHz)		Rated ripple current (mA <sub>rms</sub> /125°C, 100k to 400kHz)	Part No.
			20°C	-40°C		
10	330	HA0	0.3	3.0	240	EMHB100ADA331MHA0G
	100	HA0	0.3	3.0	240	EMHB160ADA101MHA0G
16	220	HA0	0.3	3.0	240	EMHB160ADA221MHA0G
	100	HA0	0.3	3.0	240	EMHB250ADA101MHA0G
25	220	HA0	0.3	3.0	240	EMHB250ADA221MHA0G
	47	HA0	0.3	3.0	240	EMHB350ADA470MHA0G
35	100	HA0	0.3	3.0	240	EMHB350ADA101MHA0G

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw



**Alchip™ - MKB Series**

- Low ESR
- Endurance : 3,000 hours at 105°C
- Rated voltage 400V, Capacitance 2.2 to 4.7μF
- RoHS Compliant

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)




**◆ SPECIFICATIONS**

Items	Characteristics
Category	
Temperature Range	-40 to +105°C
Rated Voltage Range	400V <sub>dc</sub>
Capacitance Tolerance	±20%(M) (20°C, 120Hz)
Leakage Current	I=0.04CV+100(max.) Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 1 minute)
Dissipation Factor (tanδ)	Rated voltage(V <sub>dc</sub> ) 400V
	tanδ (Max.) 0.25 (20°C, 120Hz)
Low Temperature Characteristics (Max. impedance Ratio)	Rated voltage(V <sub>dc</sub> ) 400V
	Z(-25°C)/Z(+20°C) 6 (120Hz)
	Z(-40°C)/Z(+20°C) 10 (120Hz)
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 3,000 hours at 105°C.
	Capacitance change ≤±20% of the initial value
	D.F. (tanδ) ≤200% of the initial specified value
	Leakage current ≤The initial specified value
Shelf life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.
	Capacitance change ≤±20% of the initial value
	D.F. (tanδ) ≤200% of the initial specified value
	Leakage current ≤The initial specified value

**◆ DIMENSIONS [mm]**

● Terminal Code : A

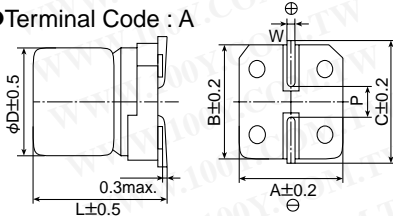


Size code	D	L	A	B	C	W	P
HA0	8	10.0	8.3	8.3	9.0	0.7 to 1.1	3.1
JA0	10	10.0	10.3	10.3	11.0	0.7 to 1.1	4.5

**◆ MARKING**

EX) 400V3.9μF



**◆ PART NUMBERING SYSTEM**

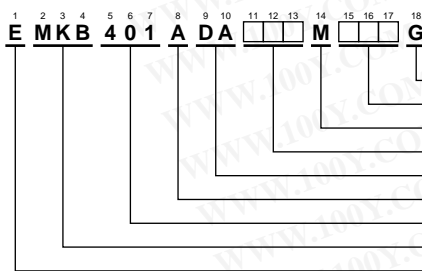

Please refer to "Product code guide (surface mount type)"

**◆ RATED VOLTAGE SYMBOL**

Rated voltage (V <sub>dc</sub> )	Symbol
400	2G

**◆ STANDARD RATINGS**

WV (V <sub>dc</sub> )	Cap (μF)	Size code	ESR (Ω <sub>max</sub> /120Hz)		Rated ripple current (mA <sub>rms</sub> /105°C, 120Hz)	Part No.
			20°C	-40°C		
400	2.2	HA0	20	1,000	26	EMKB401ADA2R2MHA0G
	3.3	JA0	10	500	37	EMKB401ADA3R3MJA0G
	3.9	JA0	10	500	38	EMKB401ADA3R9MJA0G
	4.7	JA0	10	500	39	EMKB401ADA4R7MJA0G

Alchip™ - **MV-BP** Series

- Bi-polar chip type for the circuit, of which polarity is frequently reversed
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant

MV-BP




◆ SPECIFICATIONS

Items	Characteristics								
Category	-40 to +85°C								
Temperature Range									
Rated Voltage Range	4 to 50V <sub>dc</sub>								
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)								
Leakage Current	I=0.05CV or 10μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)								
Dissipation Factor (tanδ)	Rated voltage (V <sub>dc</sub> )	4V	6.3V	10V	16V	25V	35V	50V	(at 20°C, 120Hz)
	tanδ (Max.)	0.45	0.32	0.26	0.24	0.22	0.20	0.20	
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V <sub>dc</sub> )	4V	6.3V	10V	16V	25V	35V	50V	(at 120Hz)
	Z(-25°C)/Z(+20°C)	7	4	3	2	2	2	2	
	Z(-40°C)/Z(+20°C)	15	10	8	6	4	3	3	
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 2,000 hours at 85°C, however the polarization shall be reversed every 250 hours.								
	Capacitance change	≤±20% of the initial value							
	D.F. (tanδ)	≤200% of the initial specified value							
	Leakage current	≤The initial specified value							
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 85°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.								
	Capacitance change	≤±15% of the initial value							
	D.F. (tanδ)	≤150% of the initial specified value							
	Leakage current	≤The initial specified value							


◆ DIMENSIONS [mm]

● Terminal Code : A

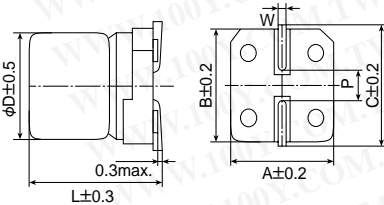

Size code	D	L	A	B	C	W	P
D55	4	5.2	4.3	4.3	5.1	0.5 to 0.8	1.0
E55	5	5.2	5.3	5.3	5.9	0.5 to 0.8	1.4
F55	6.3	5.2	6.6	6.6	7.2	0.5 to 0.8	1.9


◆ PART NUMBERING SYSTEM

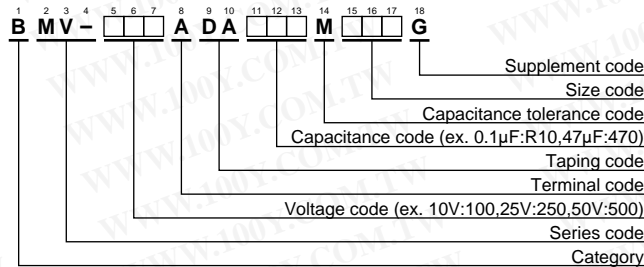

Please refer to "Product code guide (surface mount type)"

◆ MARKING

EX) 35V4.7μF



◆ STANDARD RATINGS

WV (V <sub>dc</sub> )	Cap (μF)	Size code	tanδ	Rated ripple current (mA <sub>rms</sub> /85°C,120Hz)	Part No.	WV (V <sub>dc</sub> )	Cap (μF)	Size code	tanδ	Rated ripple current (mA <sub>rms</sub> /85°C,120Hz)	Part No.
4	(15)	(D55)	(0.45)	(14)	BMV-4R0ADA150MD55G	35	4.7	E55	0.20	13	BMV-350ADA4R7ME55G
	10	D55	0.32	13	BMV-6R3ADA100MD55G		(6.8)	(F55)	(0.20)	(17)	BMV-350ADA6R8MF55G
6.3	22	E55	0.32	23	BMV-6R3ADA220ME55G		10	F55	0.20	21	BMV-350ADA100MF55G
	47	F55	0.32	36	BMV-6R3ADA470MF55G	50	0.10	D55	0.20	1.3	BMV-500ADAR10MD55G
10	(6.8)	(D55)	(0.26)	(12)	BMV-100ADA6R8MD55G		(0.15)	(D55)	(0.20)	(1.9)	BMV-500ADAR15MD55G
	(15)	(E55)	(0.26)	(21)	BMV-100ADA150ME55G		0.22	D55	0.20	2.3	BMV-500ADAR22MD55G
16	33	F55	0.26	33	BMV-100ADA330MF55G		0.33	D55	0.20	2.8	BMV-500ADAR33MD55G
	4.7	D55	0.24	11	BMV-160ADA4R7MD55G		0.47	D55	0.20	3.4	BMV-500ADAR47MD55G
	10	E55	0.24	18	BMV-160ADA100ME55G		(0.68)	(D55)	(0.20)	(4.1)	BMV-500ADAR68MD55G
25	22	F55	0.24	28	BMV-160ADA220MF55G		1.0	D55	0.20	5.5	BMV-500ADA1R0MD55G
	3.3	D55	0.22	9.0	BMV-250ADA3R3MD55G		(1.5)	(D55)	(0.20)	(6.5)	BMV-500ADA1R5MD55G
	(6.8)	(E55)	(0.22)	(15)	BMV-250ADA6R8ME55G		2.2	E55	0.20	9.0	BMV-500ADA2R2ME55G
35	(15)	(F55)	(0.22)	(24)	BMV-250ADA150MF55G		3.3	E55	0.20	11	BMV-500ADA3R3ME55G
	2.2	D55	0.20	8.0	BMV-350ADA2R2MD55G	4.7	F55	0.20	14	BMV-500ADA4R7MF55G	

( ) : Second standard

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Alchip™ - **MVK-BP** Series

- Bi-polar chip type for the circuit, of which polarity is frequently reversed
- Solvent resistant type (see PRECAUTIONS AND GUIDELINES)
- RoHS Compliant

MVK-BP

Bi-polar  
MVK




◆ SPECIFICATIONS

Items	Characteristics						
Category	-40 to +105°C						
Temperature Range	-40 to +105°C						
Rated Voltage Range	6.3 to 50V <sub>dc</sub>						
Capacitance Tolerance	±20% (M) (at 20°C, 120Hz)						
Leakage Current	I = 0.05CV or 10μA, whichever is greater. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 2 minutes)						
Dissipation Factor (tanδ)	Rated voltage (V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V
	tanδ (Max.)	0.35	0.26	0.24	0.20	0.18	0.18
Low Temperature Characteristics (Max. Impedance Ratio)	Rated voltage (V <sub>dc</sub> )	6.3V	10V	16V	25V	35V	50V
	Z(-25°C)/Z(+20°C)	4	3	2	2	2	2
	Z(-40°C)/Z(+20°C)	10	8	6	4	3	3
Endurance	The following specifications shall be satisfied when the capacitors are restored to 20°C after the rated voltage is applied for 1,000 hours at 105°C, however the polarization shall be reversed every 250 hours.						
	Capacitance change	≤±30% of the initial value					
	D.F. (tanδ)	≤300% of the initial specified value					
	Leakage current	≤The initial specified value					
Shelf Life	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 500 hours at 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to Item 4.1 of JIS C 5101-4.						
	Capacitance change	≤±25% of the initial value					
	D.F. (tanδ)	≤200% of the initial specified value					
	Leakage current	≤The initial specified value					


◆ DIMENSIONS [mm]

● Terminal Code : A

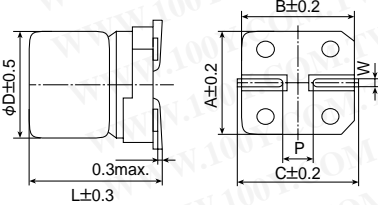

Size code	D	L	A	B	C	W	P
D60	4	5.7	4.3	4.3	5.1	0.5 to 0.8	1.0
E60	5	5.7	5.3	5.3	5.9	0.5 to 0.8	1.4
F60	6.3	5.7	6.6	6.6	7.2	0.5 to 0.8	1.9


◆ PART NUMBERING SYSTEM

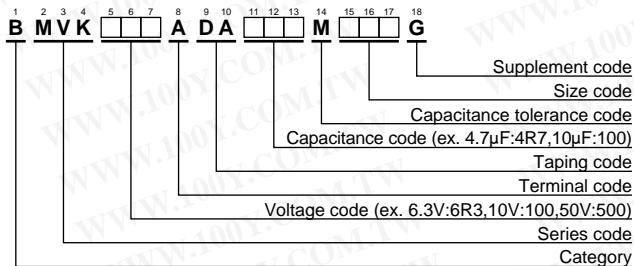

Please refer to "Product code guide (surface mount type)"

◆ MARKING

EX) 35V4.7μF



◆ STANDARD RATINGS

WV (V <sub>dc</sub> )	Cap (μF)	Size code	tanδ	Rated ripple current (mA <sub>rms</sub> /105°C, 120Hz)	Part No.	WV (V <sub>dc</sub> )	Cap (μF)	Size code	tanδ	Rated ripple current (mA <sub>rms</sub> /105°C, 120Hz)	Part No.
6.3	10	D60	0.35	14	BMVK6R3ADA100MD60G	50	0.10	D60	0.18	1.3	BMVK500ADAR10MD60G
	22	E60	0.35	25	BMVK6R3ADA220ME60G		(0.15)	(D60)	(0.18)	(1.9)	BMVK500ADAR15MD60G
	47	F60	0.35	39	BMVK6R3ADA470MF60G		0.22	D60	0.18	2.3	BMVK500ADAR22MD60G
10	(6.8)	(D60)	(0.26)	(13)	BMVK100ADA6R8MD60G		0.33	D60	0.18	2.8	BMVK500ADAR33MD60G
	(15)	(E60)	(0.26)	(22)	BMVK100ADA150ME60G		0.47	D60	0.18	3.4	BMVK500ADAR47MD60G
	33	F60	0.26	35	BMVK100ADA330MF60G		(0.68)	(D60)	(0.18)	(4.1)	BMVK500ADAR68MD60G
16	4.7	D60	0.24	12	BMVK160ADA4R7MD60G		1.0	D60	0.18	5.5	BMVK500ADA1R0MD60G
	10	E60	0.24	20	BMVK160ADA100ME60G		(1.5)	(D60)	(0.18)	(7.5)	BMVK500ADA1R5MD60G
	22	F60	0.24	32	BMVK160ADA220MF60G		2.2	E60	0.18	10	BMVK500ADA2R2ME60G
25	3.3	D60	0.20	10	BMVK250ADA3R3MD60G		3.3	E60	0.18	13	BMVK500ADA3R3ME60G
	(6.8)	(E60)	(0.20)	(17)	BMVK250ADA6R8ME60G		4.7	F60	0.18	16	BMVK500ADA4R7MF60G
	(15)	(F60)	(0.20)	(28)	BMVK250ADA150MF60G		(6.8)	(F60)	(0.18)	(20)	BMVK500ADA6R8MF60G
35	2.2	D60	0.18	8.8	BMVK350ADA2R2MD60G						
	4.7	E60	0.18	15	BMVK350ADA4R7ME60G						
	10	F60	0.18	23	BMVK350ADA100MF60G						

( ) : Second standard

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
 Http://www.100y.com.tw

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## Appendix (Part number)

### ◆Capacitance code

\* How to use the table

2nd	1st
2nd	Cap. Value

Capacitance value part

2nd	1st								
	1	2	3	4	5	6	7	8	9
0	10.0	20.0	30.0	40.0	50.0	60.0	70.0	80.0	90.0
A	10.5	20.5	30.5	40.5	50.5	60.5	70.5	80.5	90.5
1	11.0	21.0	31.0	41.0	51.0	61.0	71.0	81.0	91.0
B	11.5	21.5	31.5	41.5	51.5	61.5	71.5	81.5	91.5
2	12.0	22.0	32.0	42.0	52.0	62.0	72.0	82.0	92.0
C	12.5	22.5	32.5	42.5	52.5	62.5	72.5	82.5	92.5
3	13.0	23.0	33.0	43.0	53.0	63.0	73.0	83.0	93.0
D	13.5	23.5	33.5	43.5	53.5	63.5	73.5	83.5	93.5
4	14.0	24.0	34.0	44.0	54.0	64.0	74.0	84.0	94.0
E	14.5	24.5	34.5	44.5	54.5	64.5	74.5	84.5	94.5
5	15.0	25.0	35.0	45.0	55.0	65.0	75.0	85.0	95.0
F	15.5	25.5	35.5	45.5	55.5	65.5	75.5	85.5	95.5
6	16.0	26.0	36.0	46.0	56.0	66.0	76.0	86.0	96.0
G	16.5	26.5	36.5	46.5	56.5	66.5	76.5	86.5	96.5
7	17.0	27.0	37.0	47.0	57.0	67.0	77.0	87.0	97.0
H	17.5	27.5	37.5	47.5	57.5	67.5	77.5	87.5	97.5
8	18.0	28.0	38.0	48.0	58.0	68.0	78.0	88.0	98.0
J	18.5	28.5	38.5	48.5	58.5	68.5	78.5	88.5	98.5
9	19.0	29.0	39.0	49.0	59.0	69.0	79.0	89.0	99.0
K	19.5	29.5	39.5	49.5	59.5	69.5	79.5	89.5	99.5



For less than 10 $\mu$ F, a decimal point position is displayed with R.

For 10 $\mu$ F or more, capacitance code is set to the first 2 digits and index (1digit).

Treatment of fraction (Refer to the table)

Example of conversion

Real cap.	The first 2 digits	Treatment of fraction	Code		
			11th	12th	13th
10.0 $\mu$ F →	10.0 →	10.0 →	1	0	0
10.1 $\mu$ F →	10.1 →	10.0 →	1	0	0
10.2 $\mu$ F →	10.2 →	10.0 →	1	0	0
10.3 $\mu$ F →	10.3 →	10.5 →	1	A	0
10.4 $\mu$ F →	10.4 →	10.5 →	1	A	0
10.5 $\mu$ F →	10.5 →	10.5 →	1	A	0
10.6 $\mu$ F →	10.6 →	10.5 →	1	A	0
10.7 $\mu$ F →	10.7 →	10.5 →	1	A	0
10.8 $\mu$ F →	10.8 →	11.0 →	1	1	0
10.9 $\mu$ F →	10.9 →	11.0 →	1	1	0
11.0 $\mu$ F →	11.0 →	11.0 →	1	1	0
132 $\mu$ F →	13.2 →	13.0 →	1	3	1
133 $\mu$ F →	13.3 →	13.5 →	1	D	1
167 $\mu$ F →	16.7 →	16.5 →	1	G	1
168 $\mu$ F →	16.8 →	17.0 →	1	7	1
1110 $\mu$ F →	11.1 →	11.0 →	1	1	2
1340 $\mu$ F →	13.4 →	13.5 →	1	D	2
13200 $\mu$ F →	13.2 →	13.0 →	1	3	3
13600 $\mu$ F →	13.6 →	13.5 →	1	D	3
270000 $\mu$ F →	27.0 →	27.0 →	2	7	4

### ◆Case length (Radial lead type)

Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th
0.0	—	—	1.0	0	1	2.0	0	2	3.0	0	3	4.0	0	4
0.1	0	B	1.1	1	B	2.1	2	B	3.1	3	B	4.1	4	B
0.2	0	C	1.2	1	C	2.2	2	C	3.2	3	C	4.2	4	C
0.3	0	D	1.3	1	D	2.3	2	D	3.3	3	D	4.3	4	D
0.4	0	E	1.4	1	E	2.4	2	E	3.4	3	E	4.4	4	E
0.5	0	F	1.5	1	F	2.5	2	F	3.5	3	F	4.5	4	F
0.6	0	G	1.6	1	G	2.6	2	G	3.6	3	G	4.6	4	G
0.7	0	H	1.7	1	H	2.7	2	H	3.7	3	H	4.7	4	H
0.8	0	J	1.8	1	J	2.8	2	J	3.8	3	J	4.8	4	J
0.9	0	K	1.9	1	K	2.9	2	K	3.9	3	K	4.9	4	K
5.0	0	5	6.0	0	6	7.0	0	7	8.0	0	8	9.0	0	9
5.1	5	B	6.1	6	B	7.1	7	B	8.1	8	B	9.1	9	B
5.2	5	C	6.2	6	C	7.2	7	C	8.2	8	C	9.2	9	C
5.3	5	D	6.3	6	D	7.3	7	D	8.3	8	D	9.3	9	D
5.4	5	E	6.4	6	E	7.4	7	E	8.4	8	E	9.4	9	E
5.5	5	F	6.5	6	F	7.5	7	F	8.5	8	F	9.5	9	F
5.6	5	G	6.6	6	G	7.6	7	G	8.6	8	G	9.6	9	G
5.7	5	H	6.7	6	H	7.7	7	H	8.7	8	H	9.7	9	H
5.8	5	J	6.8	6	J	7.8	7	J	8.8	8	J	9.8	9	J
5.9	5	K	6.9	6	K	7.9	7	K	8.9	8	K	9.9	9	K
10.0	1	0	11.0	1	1	12.0	1	2	13.0	1	3	14.0	1	4
10.1	A	1	11.1	B	1	12.1	C	1	13.1	D	1	14.1	E	1
10.2	A	2	11.2	B	2	12.2	C	2	13.2	D	2	14.2	E	2
10.3	A	3	11.3	B	3	12.3	C	3	13.3	D	3	14.3	E	3
10.4	A	4	11.4	B	4	12.4	C	4	13.4	D	4	14.4	E	4
10.5	A	5	11.5	B	5	12.5	C	5	13.5	D	5	14.5	E	5
10.6	A	6	11.6	B	6	12.6	C	6	13.6	D	6	14.6	E	6
10.7	A	7	11.7	B	7	12.7	C	7	13.7	D	7	14.7	E	7
10.8	A	8	11.8	B	8	12.8	C	8	13.8	D	8	14.8	E	8
10.9	A	9	11.9	B	9	12.9	C	9	13.9	D	9	14.9	E	9



# PART NUMBERING SYSTEM

Case length [mm]	16th	17th
15.0	1	5
15.1	F	1
15.2	F	2
15.3	F	3
15.4	F	4
15.5	F	5
15.6	F	6
15.7	F	7
15.8	F	8
15.9	F	9

Case length [mm]	16th	17th
16.0	1	6
16.1	G	1
16.2	G	2
16.3	G	3
16.4	G	4
16.5	G	5
16.6	G	6
16.7	G	7
16.8	G	8
16.9	G	9

Case length [mm]	16th	17th
17.0	1	7
17.1	H	1
17.2	H	2
17.3	H	3
17.4	H	4
17.5	H	5
17.6	H	6
17.7	H	7
17.8	H	8
17.9	H	9

Case length [mm]	16th	17th
18.0	1	8
18.1	J	1
18.2	J	2
18.3	J	3
18.4	J	4
18.5	J	5
18.6	J	6
18.7	J	7
18.8	J	8
18.9	J	9

Case length [mm]	16th	17th
19.0	1	9
19.1	K	1
19.2	K	2
19.3	K	3
19.4	K	4
19.5	K	5
19.6	K	6
19.7	K	7
19.8	K	8
19.9	K	9

Case length [mm]	16th	17th
20.0	2	0
20.5	L	1
21.0	2	1
21.5	L	3
22.0	2	2
22.5	L	5
23.0	2	3
23.5	L	7
24.0	2	4
24.5	L	9
25.0	2	5
25.5	M	1
26.0	2	6
26.5	M	3
27.0	2	7
27.5	M	5
28.0	2	8
28.5	M	7
29.0	2	9
29.5	M	9

Case length [mm]	16th	17th
30.0	3	0
30.5	N	1
31.0	3	1
31.5	N	3
32.0	3	2
32.5	N	5
33.0	3	3
33.5	N	7
34.0	3	4
34.5	N	9
35.0	3	5
35.5	P	1
36.0	3	6
36.5	P	3
37.0	3	7
37.5	P	5
38.0	3	8
38.5	P	7
39.0	3	9
39.5	P	9

Case length [mm]	16th	17th
40.0	4	0
40.5	Q	1
41.0	4	1
41.5	Q	3
42.0	4	2
42.5	Q	5
43.0	4	3
43.5	Q	7
44.0	4	4
44.5	Q	9
45.0	4	5
45.5	R	1
46.0	4	6
46.5	R	3
47.0	4	7
47.5	R	5
48.0	4	8
48.5	R	7
49.0	4	9
49.5	R	9

Case length [mm]	16th	17th
50.0	5	0
50.5	S	1
51.0	5	1
51.5	S	3
52.0	5	2
52.5	S	5
53.0	5	3
53.5	S	7
54.0	5	4
54.5	S	9
55.0	5	5
55.5	T	1
56.0	5	6
56.5	T	3
57.0	5	7
57.5	T	5
58.0	5	8
58.5	T	7
59.0	5	9
59.5	T	9

Case length [mm]	16th	17th
60.0	6	0
60.5	U	1
61.0	6	1
61.5	U	3
62.0	6	2
62.5	U	5
63.0	6	3
63.5	U	7
64.0	6	4
64.5	U	9
65.0	6	5
65.5	V	1
66.0	6	6
66.5	V	3
67.0	6	7
67.5	V	5
68.0	6	8
68.5	V	7
69.0	6	9
69.5	V	9

Case length [mm]	16th	17th
70.0	7	0
70.5	W	1
71.0	7	1
71.5	W	3
72.0	7	2
72.5	W	5
73.0	7	3
73.5	W	7
74.0	7	4
74.5	W	9
75.0	7	5
75.5	X	1
76.0	7	6
76.5	X	3
77.0	7	7
77.5	X	5
78.0	7	8
78.5	X	7
79.0	7	9
79.5	X	9

Case length [mm]	16th	17th
80.0	8	0
80.5	Y	1
81.0	8	1
81.5	Y	3
82.0	8	2
82.5	Y	5
83.0	8	3
83.5	Y	7
84.0	8	4
84.5	Y	9
85.0	8	5
85.5	Z	1
86.0	8	6
86.5	Z	3
87.0	8	7
87.5	Z	5
88.0	8	8
88.5	Z	7
89.0	8	9
89.5	Z	9

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## ◆Case length (Snap-in type / Screw mount terminal type)

Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th	Case length [mm]	16th	17th
20	2	0	30	3	0	40	4	0	50	5	0	60	6	0
21	2	1	31	3	1	41	4	1	51	5	1	61	6	1
22	2	2	32	3	2	42	4	2	52	5	2	62	6	2
23	2	3	33	3	3	43	4	3	53	5	3	63	6	3
24	2	4	34	3	4	44	4	4	54	5	4	64	6	4
25	2	5	35	3	5	45	4	5	55	5	5	65	6	5
26	2	6	36	3	6	46	4	6	56	5	6	66	6	6
27	2	7	37	3	7	47	4	7	57	5	7	67	6	7
28	2	8	38	3	8	48	4	8	58	5	8	68	6	8
29	2	9	39	3	9	49	4	9	59	5	9	69	6	9
70	7	0	80	8	0	90	9	0	100	A	0	110	B	0
71	7	1	81	8	1	91	9	1	101	A	1	111	B	1
72	7	2	82	8	2	92	9	2	102	A	2	112	B	2
73	7	3	83	8	3	93	9	3	103	A	3	113	B	3
74	7	4	84	8	4	94	9	4	104	A	4	114	B	4
75	7	5	85	8	5	95	9	5	105	A	5	115	B	5
76	7	6	86	8	6	96	9	6	106	A	6	116	B	6
77	7	7	87	8	7	97	9	7	107	A	7	117	B	7
78	7	8	88	8	8	98	9	8	108	A	8	118	B	8
79	7	9	89	8	9	99	9	9	109	A	9	119	B	9
120	C	0	130	D	0	140	E	0	150	F	0	160	G	0
121	C	1	131	D	1	141	E	1	151	F	1	161	G	1
122	C	2	132	D	2	142	E	2	152	F	2	162	G	2
123	C	3	133	D	3	143	E	3	153	F	3	163	G	3
124	C	4	134	D	4	144	E	4	154	F	4	164	G	4
125	C	5	135	D	5	145	E	5	155	F	5	165	G	5
126	C	6	136	D	6	146	E	6	156	F	6	166	G	6
127	C	7	137	D	7	147	E	7	157	F	7	167	G	7
128	C	8	138	D	8	148	E	8	158	F	8	168	G	8
129	C	9	139	D	9	149	E	9	159	F	9	169	G	9
170	H	0	180	J	0	190	K	0	200	L	0	210	M	0
171	H	1	181	J	1	191	K	1	201	L	1	211	M	1
172	H	2	182	J	2	192	K	2	202	L	2	212	M	2
173	H	3	183	J	3	193	K	3	203	L	3	213	M	3
174	H	4	184	J	4	194	K	4	204	L	4	214	M	4
175	H	5	185	J	5	195	K	5	205	L	5	215	M	5
176	H	6	186	J	6	196	K	6	206	L	6	216	M	6
177	H	7	187	J	7	197	K	7	207	L	7	217	M	7
178	H	8	188	J	8	198	K	8	208	L	8	218	M	8
179	H	9	189	J	9	199	K	9	209	L	9	219	M	9
220	N	0	230	P	0	240	Q	0	250	R	0	260	S	0
221	N	1	231	P	1	241	Q	1	251	R	1	261	S	1
222	N	2	232	P	2	242	Q	2	252	R	2	262	S	2
223	N	3	233	P	3	243	Q	3	253	R	3	263	S	3
224	N	4	234	P	4	244	Q	4	254	R	4	264	S	4
225	N	5	235	P	5	245	Q	5	255	R	5	265	S	5
226	N	6	236	P	6	246	Q	6	256	R	6	266	S	6
227	N	7	237	P	7	247	Q	7	257	R	7	267	S	7
228	N	8	238	P	8	248	Q	8	258	R	8	268	S	8
229	N	9	239	P	9	249	Q	9	259	R	9	269	S	9

## ◆ Supplement code

### Surface mount type / Conductive polymer (Include Radial lead type)

	Terminal plating material (Radial lead type)		
	Sn100%	Sn-Bi	Sn-Pb
Coating case	S	G	N

### Radial lead type / Snap-in type

		Terminal plating material (Radial lead type)		
		Sn100%	Sn-Bi	Sn-Pb
Outer sleeve	PET	S	D	C
	Coating case	H	G	F
	Polyolefin	L	—	—
	Pb-free PVC	M	—	N
	PVC	B	A	N

\* Pb-free snap-in type does not have a plastic disk.

We also produce Pb-free snap-in type with "Plastic disk, Pb-free PVC sleeve and Sn100% terminal plating".

In this case, supplement code (the 18th digit) is "T".

### Screw mount terminal type

	Screw terminal
Pb-free PVC	M
Polyolefin	S
PET	C
PVC	N

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)