


NLS1

1Amp CLASS K5 FUSE 600VAC/DC

21mm x 127mm CARTRIDGE TYPE (FERRULE)


"ONE TIME"

Manufactured By: **LITTELFUSE** (alpha)

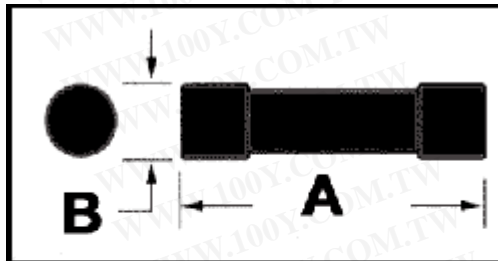

	millimetres	Inches
A	127.0	5.000
B	20.6	0.811

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

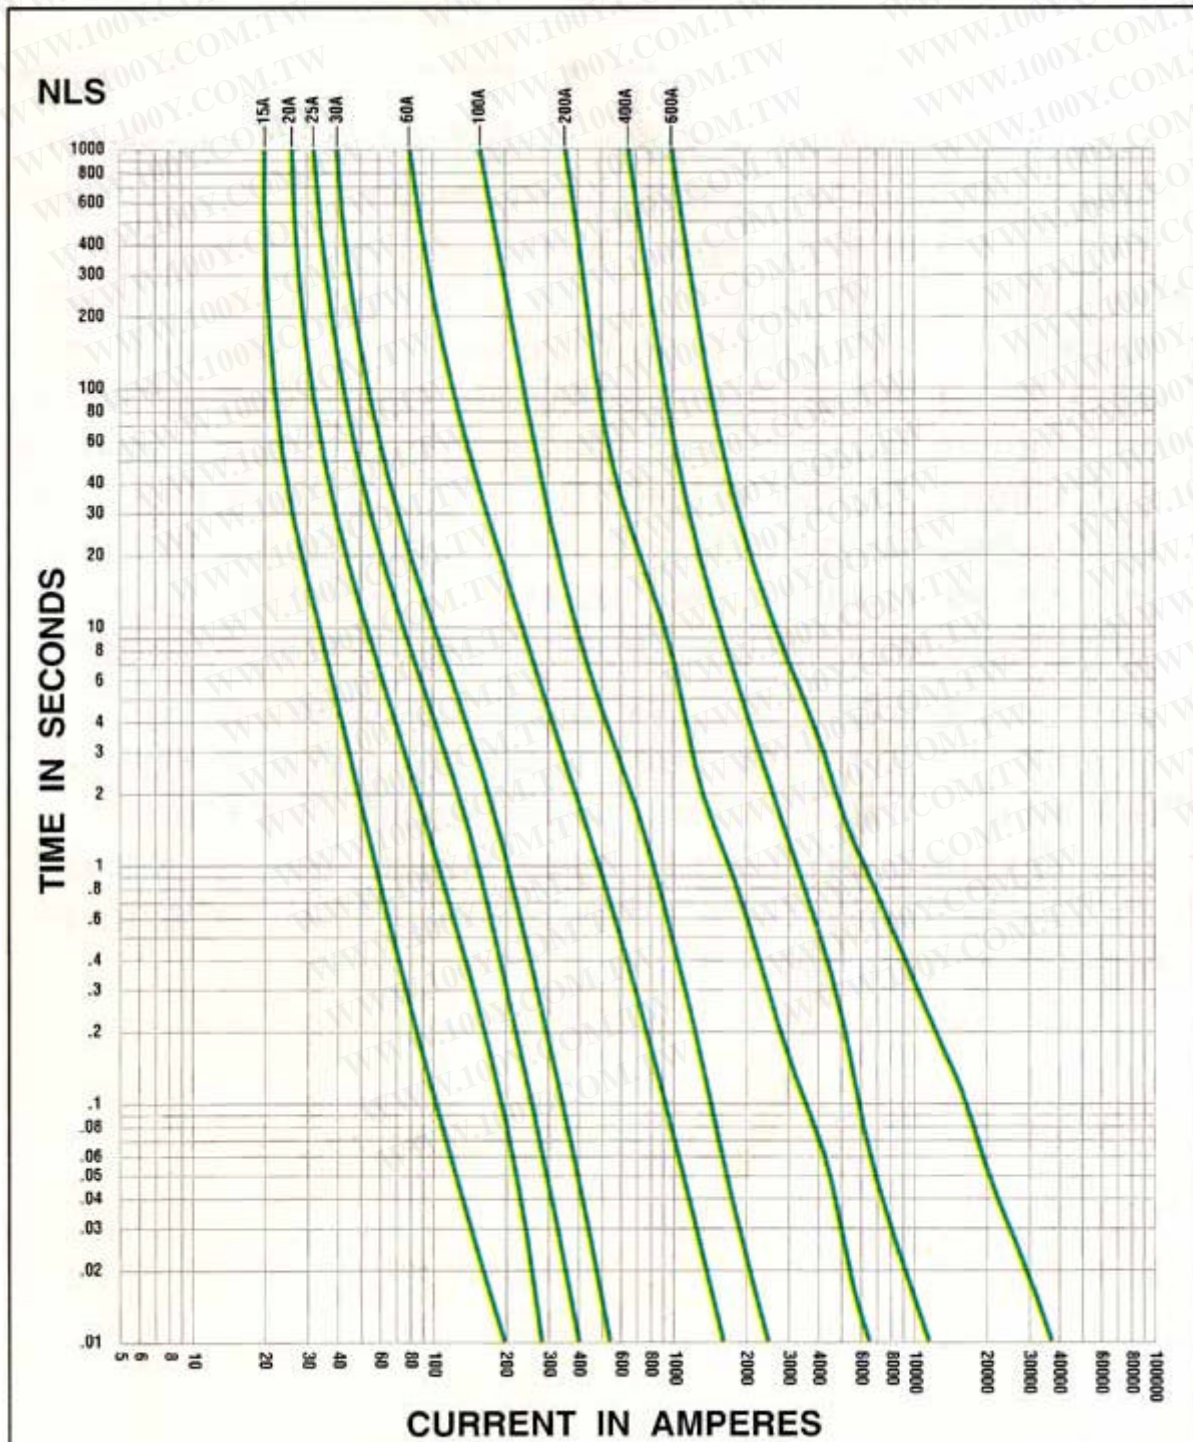

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

PARAMETERS		
PACKAGE TYPE	PKG TYPE	
MOUNT METHOD	MOUNT	
COLOR	COLOR	
	FUSECATEGORY	UL Fuse Class
LITTELFUSE INDICATOR(TM) FUSE TECHNOLOGY	INDICATING	N
FUSE OPENING CHARACTERISTIC	OPENING CHARACTERISTIC	Fast-Acting
MEDIUM VOLTAGE FUSE SIZE	SIZE	Industrial Cartridge
SIZE DUP	SIZE DUP	
TYPE	TYPE	
UL CLASS	UL CLASS	K5
MAX AC VOLTAGE RATING	VAC (V)	600
MAX DC VOLTAGE RATING	VDC (V)	600
CURRENT RATING	CURRENT (A)	1.0000
CERTIFICATIONS	CERT	Ⓢ Ⓛ
INTERRUPT RATINGS	IR	50000A @ 600VAC 20000A @ 600VDC