

# MC74HC14A

## Hex Schmitt-Trigger Inverter

### High-Performance Silicon-Gate CMOS

The MC74HC14A is identical in pinout to the LS14, LS04 and the HC04. The device inputs are compatible with Standard CMOS outputs; with pullup resistors, they are compatible with LSTTL outputs.

The HC14A is useful to “square up” slow input rise and fall times. Due to hysteresis voltage of the Schmitt trigger, the HC14A finds applications in noisy environments.

#### Features

- Output Drive Capability: 10 LSTTL Loads
- Outputs Directly Interface to CMOS, NMOS and TTL
- Operating Voltage Range: 2.0 to 6.0 V
- Low Input Current: 1.0  $\mu$ A
- High Noise Immunity Characteristic of CMOS Devices
- In Compliance With the JEDEC Standard No. 7.0 A Requirements
- Chip Complexity: 60 FETs or 15 Equivalent Gates
- Pb-Free Packages are Available\*


勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)




ON Semiconductor®

<http://onsemi.com>

#### MARKING DIAGRAMS





PDIP-14  
N SUFFIX  
CASE 646




SOIC-14  
D SUFFIX  
CASE 751A



TSSOP-14  
DT SUFFIX  
CASE 948G



SOEIAJ-14  
F SUFFIX  
CASE 965



A = Assembly Location  
L, WL = Wafer Lot  
Y, YY = Year  
W, WW = Work Week  
G = Pb-Free Package  
■ = Pb-Free Package  
(Note: Microdot may be in either location)


#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 2 of this data sheet.

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# MC74HC14A


Pinout: 14-Lead Packages (Top View)

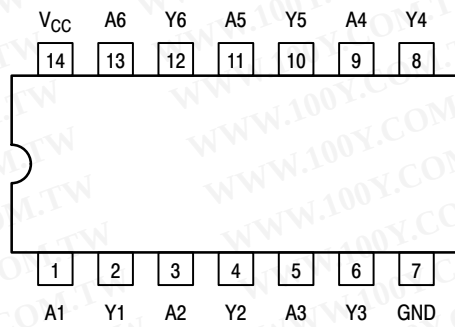

FUNCTION TABLE

| Inputs | Outputs |
|--------|---------|
| A      | Y       |
| L      | H       |
| H      | L       |

LOGIC DIAGRAM

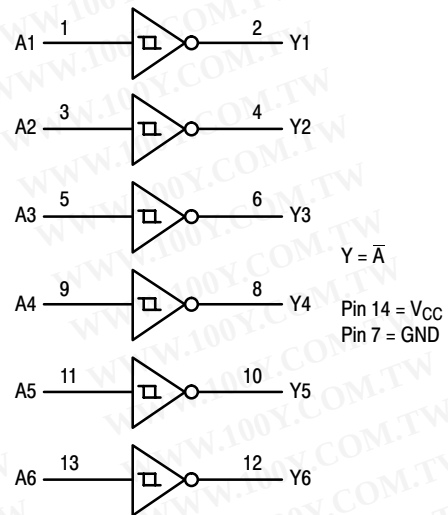

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## ORDERING INFORMATION

| Device         | Package             | Shipping†         |
|----------------|---------------------|-------------------|
| MC74HC14AN     | PDIP-14             | 2000 Units / Box  |
| MC74HC14ANG    | PDIP-14 (Pb-Free)   | 2000 Units / Box  |
| MC74HC14AD     | SOIC-14             | 55 Units / Rail   |
| MC74HC14ADG    | SOIC-14 (Pb-Free)   | 55 Units / Rail   |
| MC74HC14ADR2   | SOIC-14             | 2500 Units / Reel |
| MC74HC14ADR2G  | SOIC-14 (Pb-Free)   | 2500 Units / Reel |
| MC74HC14ADT    | TSSOP-14*           | 96 Units / Rail   |
| MC74HC14ADTG   | TSSOP-14*           | 96 Units / Rail   |
| MC74HC14ADTR2  | TSSOP-14*           | 2500 Units / Reel |
| MC74HC14ADTR2G | TSSOP-14*           | 2500 Units / Reel |
| MC74HC14AF     | SOEIAJ-14           | 50 Units / Rail   |
| MC74HC14AFG    | SOEIAJ-14 (Pb-Free) | 50 Units / Rail   |
| MC74HC14AFEL   | SOEIAJ-14           | 2000 Units / Reel |
| MC74HC14AFELG  | SOEIAJ-14 (Pb-Free) | 2000 Units / Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*This package is inherently Pb-Free.

# MC74HC14A

## MAXIMUM RATINGS

| Symbol    | Parameter                                                                             | Value                   | Unit |
|-----------|---------------------------------------------------------------------------------------|-------------------------|------|
| $V_{CC}$  | DC Supply Voltage (Referenced to GND)                                                 | − 0.5 to + 7.0          | V    |
| $V_{in}$  | DC Input Voltage (Referenced to GND)                                                  | − 0.5 to $V_{CC} + 0.5$ | V    |
| $V_{out}$ | DC Output Voltage (Referenced to GND)                                                 | − 0.5 to $V_{CC} + 0.5$ | V    |
| $I_{in}$  | DC Input Current, per Pin                                                             | ± 20                    | mA   |
| $I_{out}$ | DC Output Current, per Pin                                                            | ± 25                    | mA   |
| $I_{CC}$  | DC Supply Current, $V_{CC}$ and GND Pins                                              | ± 50                    | mA   |
| $P_D$     | Power Dissipation in Still Air,<br>Plastic DIP†<br>SOIC Package†<br>TSSOP Package†    | 750<br>500<br>450       | mW   |
| $T_{stg}$ | Storage Temperature Range                                                             | − 65 to + 150           | °C   |
| $T_L$     | Lead Temperature, 1 mm from Case for 10 Seconds<br>Plastic DIP, SOIC or TSSOP Package | 260                     | °C   |

Maximum ratings are those values beyond which device damage can occur. Maximum ratings applied to the device are individual stress limit values (not normal operating conditions) and are not valid simultaneously. If these limits are exceeded, device functional operation is not implied, damage may occur and reliability may be affected.

†Derating — Plastic DIP: − 10 mW/°C from 65° to 125°C  
SOIC Package: − 7 mW/°C from 65° to 125°C  
TSSOP Package: − 6.1 mW/°C from 65° to 125°C

For high frequency or heavy load considerations, see Chapter 2 of the ON Semiconductor High-Speed CMOS Data Book (DL129/D).

This device contains protection circuitry to guard against damage due to high static voltages or electric fields. However, precautions must be taken to avoid applications of any voltage higher than maximum rated voltages to this high-impedance circuit. For proper operation,  $V_{in}$  and  $V_{out}$  should be constrained to the range  $GND \leq (V_{in} \text{ or } V_{out}) \leq V_{CC}$ . Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or  $V_{CC}$ ). Unused outputs must be left open.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## RECOMMENDED OPERATING CONDITIONS

| Symbol            | Parameter                                            | Min                                                                              | Max                                      | Unit |
|-------------------|------------------------------------------------------|----------------------------------------------------------------------------------|------------------------------------------|------|
| $V_{CC}$          | DC Supply Voltage (Referenced to GND)                | 2.0                                                                              | 6.0                                      | V    |
| $V_{in}, V_{out}$ | DC Input Voltage, Output Voltage (Referenced to GND) | 0                                                                                | $V_{CC}$                                 | V    |
| $T_A$             | Operating Temperature Range, All Package Types       | − 55                                                                             | + 125                                    | °C   |
| $t_r, t_f$        | Input Rise/Fall Time<br>(Figure 1)                   | $V_{CC} = 2.0 \text{ V}$<br>$V_{CC} = 4.5 \text{ V}$<br>$V_{CC} = 6.0 \text{ V}$ | 0<br>No Limit*<br>No Limit*<br>No Limit* | ns   |

\*When  $V_{in} = 50\% V_{CC}$ ,  $I_{CC} > 1\text{mA}$

# MC74HC14A

## DC CHARACTERISTICS (Voltages Referenced to GND)

| Symbol                       | Parameter                                                    | Condition                                                                                                                          | V <sub>CC</sub><br>V | Guaranteed Limit |       |        | Unit |
|------------------------------|--------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------|----------------------|------------------|-------|--------|------|
|                              |                                                              |                                                                                                                                    |                      | -55 to 25°C      | ≤85°C | ≤125°C |      |
| V <sub>T+</sub> max          | Maximum Positive-Going Input Threshold Voltage<br>(Figure 3) | V <sub>out</sub> = 0.1V<br> I <sub>out</sub>   ≤ 20μA                                                                              | 2.0                  | 1.50             | 1.50  | 1.50   | V    |
|                              |                                                              |                                                                                                                                    | 3.0                  | 2.15             | 2.15  | 2.15   |      |
|                              |                                                              |                                                                                                                                    | 4.5                  | 3.15             | 3.15  | 3.15   |      |
|                              |                                                              |                                                                                                                                    | 6.0                  | 4.20             | 4.20  | 4.20   |      |
| V <sub>T+</sub> min          | Minimum Positive-Going Input Threshold Voltage<br>(Figure 3) | V <sub>out</sub> = 0.1V<br> I <sub>out</sub>   ≤ 20μA                                                                              | 2.0                  | 1.0              | 0.95  | 0.95   | V    |
|                              |                                                              |                                                                                                                                    | 3.0                  | 1.5              | 1.45  | 1.45   |      |
|                              |                                                              |                                                                                                                                    | 4.5                  | 2.3              | 2.25  | 2.25   |      |
|                              |                                                              |                                                                                                                                    | 6.0                  | 3.0              | 2.95  | 2.95   |      |
| V <sub>T-</sub> max          | Maximum Negative-Going Input Threshold Voltage<br>(Figure 3) | V <sub>out</sub> = V <sub>CC</sub> - 0.1V<br> I <sub>out</sub>   ≤ 20μA                                                            | 2.0                  | 0.9              | 0.95  | 0.95   | V    |
|                              |                                                              |                                                                                                                                    | 3.0                  | 1.4              | 1.45  | 1.45   |      |
|                              |                                                              |                                                                                                                                    | 4.5                  | 2.0              | 2.05  | 2.05   |      |
|                              |                                                              |                                                                                                                                    | 6.0                  | 2.6              | 2.65  | 2.65   |      |
| V <sub>T-</sub> min          | Minimum Negative-Going Input Threshold Voltage<br>(Figure 3) | V <sub>out</sub> = V <sub>CC</sub> - 0.1V<br> I <sub>out</sub>   ≤ 20μA                                                            | 2.0                  | 0.3              | 0.3   | 0.3    | V    |
|                              |                                                              |                                                                                                                                    | 3.0                  | 0.5              | 0.5   | 0.5    |      |
|                              |                                                              |                                                                                                                                    | 4.5                  | 0.9              | 0.9   | 0.9    |      |
|                              |                                                              |                                                                                                                                    | 6.0                  | 1.2              | 1.2   | 1.2    |      |
| V <sub>H</sub> max<br>Note 2 | Maximum Hysteresis Voltage<br>(Figure 3)                     | V <sub>out</sub> = 0.1V or V <sub>CC</sub> - 0.1V<br> I <sub>out</sub>   ≤ 20μA                                                    | 2.0                  | 1.20             | 1.20  | 1.20   | V    |
|                              |                                                              |                                                                                                                                    | 3.0                  | 1.65             | 1.65  | 1.65   |      |
|                              |                                                              |                                                                                                                                    | 4.5                  | 2.25             | 2.25  | 2.25   |      |
|                              |                                                              |                                                                                                                                    | 6.0                  | 3.00             | 3.00  | 3.00   |      |
| V <sub>H</sub> min<br>Note 2 | Minimum Hysteresis Voltage<br>(Figure 3)                     | V <sub>out</sub> = 0.1V or V <sub>CC</sub> - 0.1V<br> I <sub>out</sub>   ≤ 20μA                                                    | 2.0                  | 0.20             | 0.20  | 0.20   | V    |
|                              |                                                              |                                                                                                                                    | 3.0                  | 0.25             | 0.25  | 0.25   |      |
|                              |                                                              |                                                                                                                                    | 4.5                  | 0.40             | 0.40  | 0.40   |      |
|                              |                                                              |                                                                                                                                    | 6.0                  | 0.50             | 0.50  | 0.50   |      |
| V <sub>OH</sub>              | Minimum High-Level Output Voltage                            | V <sub>in</sub> ≤ V <sub>T-</sub> min<br> I <sub>out</sub>   ≤ 20μA                                                                | 2.0                  | 1.9              | 1.9   | 1.9    | V    |
|                              |                                                              |                                                                                                                                    | 4.5                  | 4.4              | 4.4   | 4.4    |      |
|                              |                                                              |                                                                                                                                    | 6.0                  | 5.9              | 5.9   | 5.9    |      |
|                              |                                                              | V <sub>in</sub> ≤ V <sub>T-</sub> min<br> I <sub>out</sub>   ≤ 2.4mA<br> I <sub>out</sub>   ≤ 4.0mA<br> I <sub>out</sub>   ≤ 5.2mA | 3.0                  | 2.48             | 2.34  | 2.20   |      |
|                              |                                                              |                                                                                                                                    | 4.5                  | 3.98             | 3.84  | 3.70   |      |
| V <sub>OL</sub>              | Maximum Low-Level Output Voltage                             | V <sub>in</sub> ≥ V <sub>T+</sub> max<br> I <sub>out</sub>   ≤ 20μA                                                                | 2.0                  | 0.1              | 0.1   | 0.1    | V    |
|                              |                                                              |                                                                                                                                    | 4.5                  | 0.1              | 0.1   | 0.1    |      |
|                              |                                                              |                                                                                                                                    | 6.0                  | 0.1              | 0.1   | 0.1    |      |
|                              |                                                              | V <sub>in</sub> ≥ V <sub>T+</sub> max<br> I <sub>out</sub>   ≤ 2.4mA<br> I <sub>out</sub>   ≤ 4.0mA<br> I <sub>out</sub>   ≤ 5.2mA | 3.0                  | 0.26             | 0.33  | 0.40   |      |
|                              |                                                              |                                                                                                                                    | 4.5                  | 0.26             | 0.33  | 0.40   |      |
| I <sub>in</sub>              | Maximum Input Leakage Current                                | V <sub>in</sub> = V <sub>CC</sub> or GND                                                                                           | 6.0                  | ±0.1             | ±1.0  | ±1.0   | μA   |
| I <sub>CC</sub>              | Maximum Quiescent Supply Current (per Package)               | V <sub>in</sub> = V <sub>CC</sub> or GND<br>I <sub>out</sub> = 0μA                                                                 | 6.0                  | 1.0              | 10    | 40     | μA   |

1. Information on typical parametric values along with frequency or heavy load considerations can be found in Chapter 2 of the ON Semiconductor High-Speed CMOS Data Book (DL129/D).
2. V<sub>H</sub>min > (V<sub>T+</sub> min) - (V<sub>T-</sub> max); V<sub>H</sub>max = (V<sub>T+</sub> max) - (V<sub>T-</sub> min).

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC74HC14A

## AC CHARACTERISTICS (C<sub>L</sub> = 50pF, Input t<sub>r</sub> = t<sub>f</sub> = 6ns)

| Symbol                                 | Parameter                                                                | V <sub>CC</sub><br>V | Guaranteed Limit |       |        | Unit |
|----------------------------------------|--------------------------------------------------------------------------|----------------------|------------------|-------|--------|------|
|                                        |                                                                          |                      | -55 to 25°C      | ≤85°C | ≤125°C |      |
| t <sub>PLH</sub> ,<br>t <sub>PHL</sub> | Maximum Propagation Delay, Input A or B to Output Y<br>(Figures 1 and 2) | 2.0                  | 75               | 95    | 110    | ns   |
|                                        |                                                                          | 3.0                  | 30               | 40    | 55     |      |
|                                        |                                                                          | 4.5                  | 15               | 19    | 22     |      |
|                                        |                                                                          | 6.0                  | 13               | 16    | 19     |      |
| t <sub>TLH</sub> ,<br>t <sub>THL</sub> | Maximum Output Transition Time, Any Output<br>(Figures 1 and 2)          | 2.0                  | 75               | 95    | 110    | ns   |
|                                        |                                                                          | 3.0                  | 27               | 32    | 36     |      |
|                                        |                                                                          | 4.5                  | 15               | 19    | 22     |      |
|                                        |                                                                          | 6.0                  | 13               | 16    | 19     |      |
| C <sub>in</sub>                        | Maximum Input Capacitance                                                |                      | 10               | 10    | 10     | pF   |

NOTE: For propagation delays with loads other than 50 pF, and information on typical parametric values, see Chapter 2 of the ON Semiconductor High-Speed CMOS Data Book (DL129/D).

| C <sub>PD</sub> | Power Dissipation Capacitance (Per Inverter)* | Typical @ 25°C, V <sub>CC</sub> = 5.0 V | pF |
|-----------------|-----------------------------------------------|-----------------------------------------|----|
|                 |                                               | 22                                      |    |

\* Used to determine the no-load dynamic power consumption: P<sub>D</sub> = C<sub>PD</sub> V<sub>CC</sub><sup>2</sup> f + I<sub>CC</sub> V<sub>CC</sub>. For load considerations, see Chapter 2 of the ON Semiconductor High-Speed CMOS Data Book (DL129/D).


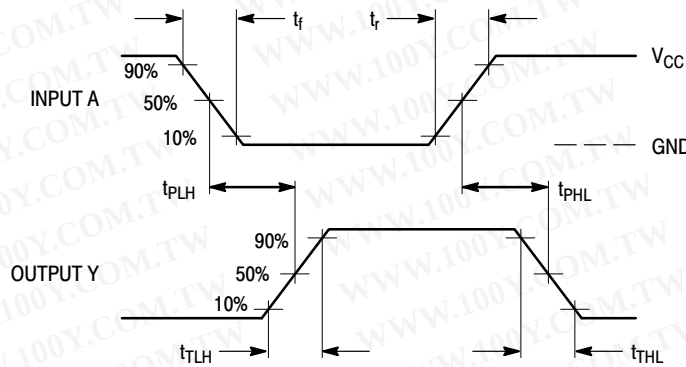


Figure 1. Switching Waveforms



\*Includes all probe and jig capacitance

Figure 2. Test Circuit

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

# MC74HC14A



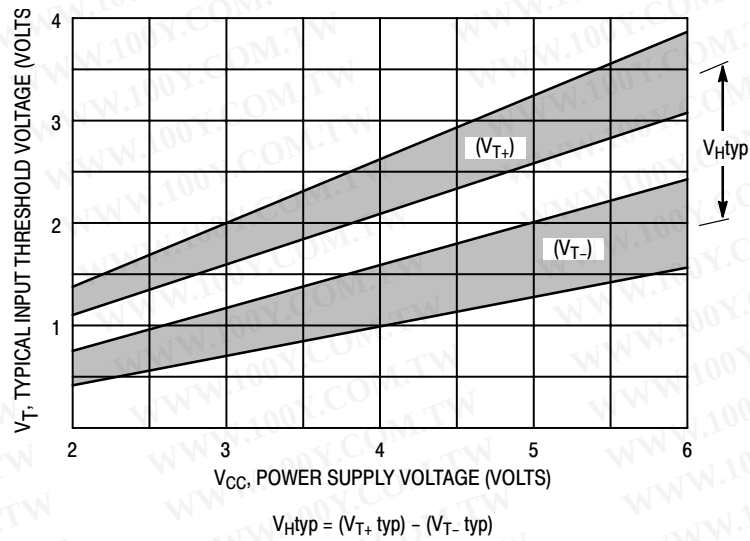


Figure 3. Typical Input Threshold,  $V_{T+}$ ,  $V_{T-}$  versus Power Supply Voltage



勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

(a) A Schmitt-Trigger Squares Up Inputs With Slow Rise and Fall Times

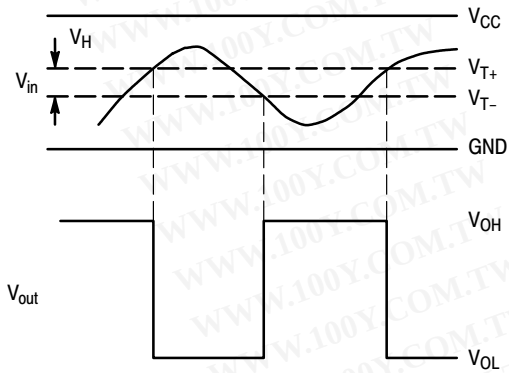

(b) A Schmitt-Trigger Offers Maximum Noise Immunity

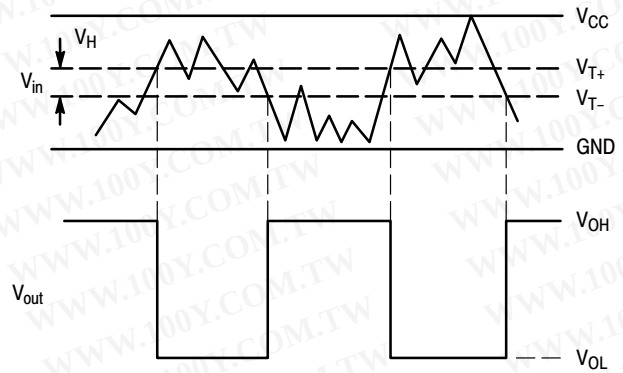



Figure 4. Typical Schmitt-Trigger Applications

# MC74HC14A

## PACKAGE DIMENSIONS

PDIP-14  
N SUFFIX  
CASE 646-06  
ISSUE N

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

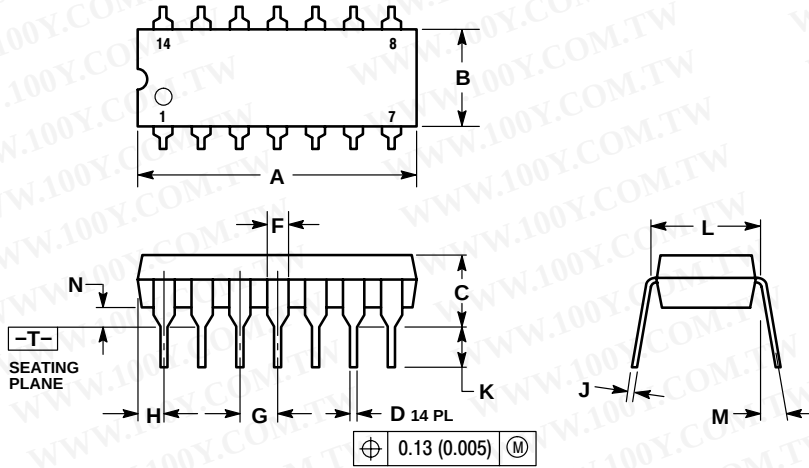


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION L TO CENTER OF LEADS WHEN FORMED PARALLEL.
4. DIMENSION B DOES NOT INCLUDE MOLD FLASH.
5. ROUNDED CORNERS OPTIONAL.

| DIM | INCHES    |       | MILLIMETERS |       |
|-----|-----------|-------|-------------|-------|
|     | MIN       | MAX   | MIN         | MAX   |
| A   | 0.715     | 0.770 | 18.16       | 18.80 |
| B   | 0.240     | 0.260 | 6.10        | 6.60  |
| C   | 0.145     | 0.185 | 3.69        | 4.69  |
| D   | 0.015     | 0.021 | 0.38        | 0.53  |
| F   | 0.040     | 0.070 | 1.02        | 1.78  |
| G   | 0.100 BSC |       | 2.54 BSC    |       |
| H   | 0.052     | 0.095 | 1.32        | 2.41  |
| J   | 0.008     | 0.015 | 0.20        | 0.38  |
| K   | 0.115     | 0.135 | 2.92        | 3.43  |
| L   | 0.290     | 0.310 | 7.37        | 7.87  |
| M   | ---       | 10°   | ---         | 10°   |
| N   | 0.015     | 0.039 | 0.38        | 1.01  |

SOIC-14  
D SUFFIX  
CASE 751A-03  
ISSUE G

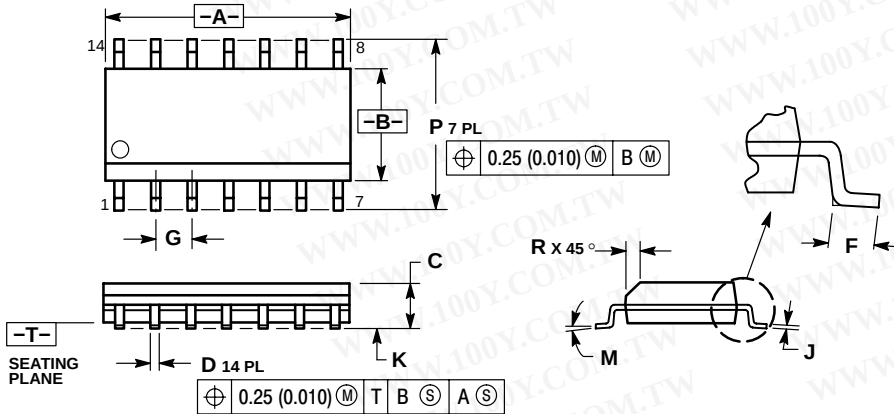

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.


| DIM | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
|     | MIN         | MAX  | MIN       | MAX   |
| A   | 8.55        | 8.75 | 0.337     | 0.344 |
| B   | 3.80        | 4.00 | 0.150     | 0.157 |
| C   | 1.35        | 1.75 | 0.054     | 0.068 |
| D   | 0.35        | 0.49 | 0.014     | 0.019 |
| F   | 0.40        | 1.25 | 0.016     | 0.049 |
| G   | 1.27 BSC    |      | 0.050 BSC |       |
| J   | 0.19        | 0.25 | 0.008     | 0.009 |
| K   | 0.10        | 0.25 | 0.004     | 0.009 |
| M   | 0°          | 7°   | 0°        | 7°    |
| P   | 5.80        | 6.20 | 0.228     | 0.244 |
| R   | 0.25        | 0.50 | 0.010     | 0.019 |

# MC74HC14A

## PACKAGE DIMENSIONS

TSSOP-14  
DT SUFFIX  
CASE 948G-01  
ISSUE A

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

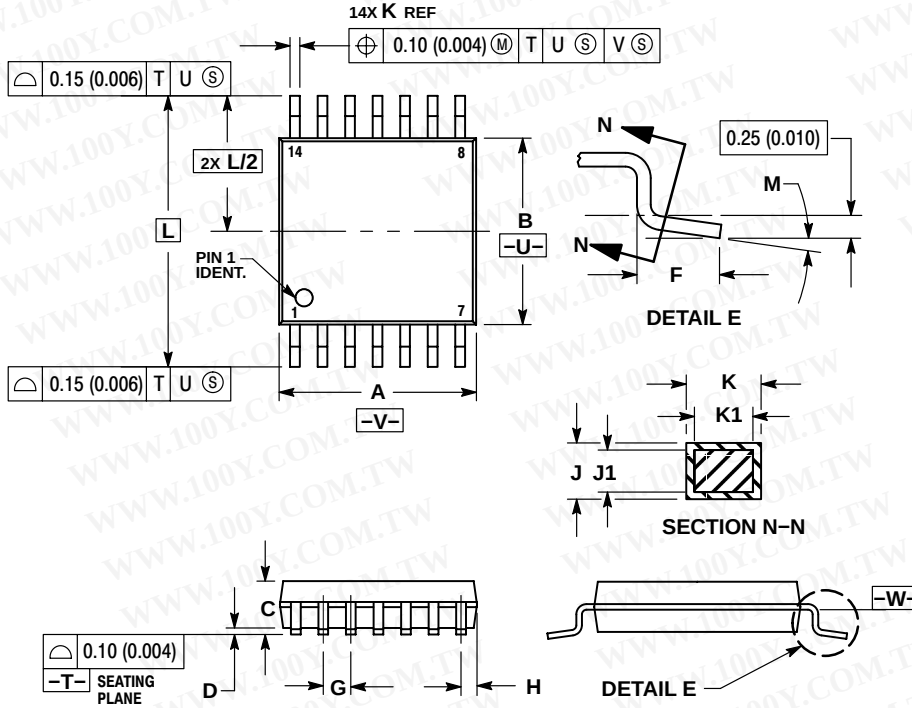

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A DOES NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS. MOLD FLASH OR GATE BURRS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. DIMENSION B DOES NOT INCLUDE INTERLEAD FLASH OR PROTRUSION. INTERLEAD FLASH OR PROTRUSION SHALL NOT EXCEED 0.25 (0.010) PER SIDE.
5. DIMENSION K DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE K DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
7. DIMENSION A AND B ARE TO BE DETERMINED AT DATUM PLANE -W-.


|     | MILLIMETERS |      | INCHES    |       |
|-----|-------------|------|-----------|-------|
| DIM | MIN         | MAX  | MIN       | MAX   |
| A   | 4.90        | 5.10 | 0.193     | 0.200 |
| B   | 4.30        | 4.50 | 0.169     | 0.177 |
| C   | ---         | 1.20 | ---       | 0.047 |
| D   | 0.05        | 0.15 | 0.002     | 0.006 |
| F   | 0.50        | 0.75 | 0.020     | 0.030 |
| G   | 0.65 BSC    |      | 0.026 BSC |       |
| H   | 0.50        | 0.60 | 0.020     | 0.024 |
| J   | 0.09        | 0.20 | 0.004     | 0.008 |
| J1  | 0.09        | 0.16 | 0.004     | 0.006 |
| K   | 0.19        | 0.30 | 0.007     | 0.012 |
| K1  | 0.19        | 0.25 | 0.007     | 0.010 |
| L   | 6.40 BSC    |      | 0.252 BSC |       |
| M   | 0°          | 8°   | 0°        | 8°    |

# MC74HC14A

## PACKAGE DIMENSIONS

SOEIAJ-14  
F SUFFIX  
CASE 965-01  
ISSUE O

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

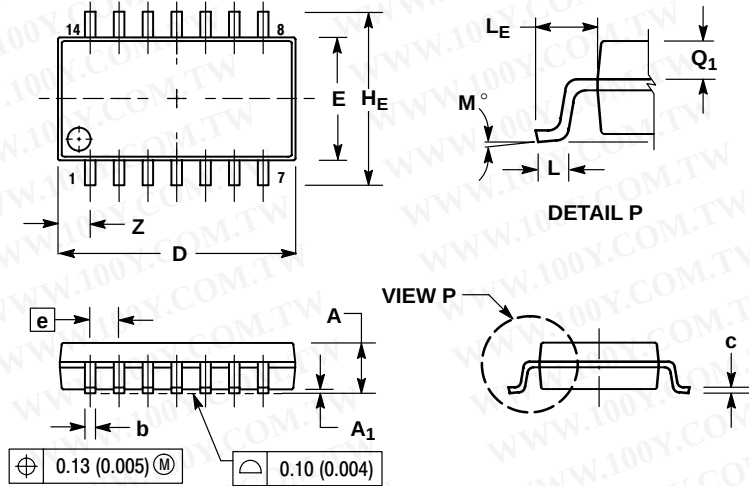

### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH OR PROTRUSIONS AND ARE MEASURED AT THE PARTING LINE. MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.15 (0.006) PER SIDE.
4. TERMINAL NUMBERS ARE SHOWN FOR REFERENCE ONLY.
5. THE LEAD WIDTH DIMENSION (b) DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.08 (0.003) TOTAL IN EXCESS OF THE LEAD WIDTH DIMENSION AT MAXIMUM MATERIAL CONDITION. DAMBAR CANNOT BE LOCATED ON THE LOWER RADIUS OR THE FOOT. MINIMUM SPACE BETWEEN PROTRUSIONS AND ADJACENT LEAD TO BE 0.46 (0.018).

| DIM            | MILLIMETERS |       | INCHES    |       |
|----------------|-------------|-------|-----------|-------|
|                | MIN         | MAX   | MIN       | MAX   |
| A              | ---         | 2.05  | ---       | 0.081 |
| A <sub>1</sub> | 0.05        | 0.20  | 0.002     | 0.008 |
| b              | 0.35        | 0.50  | 0.014     | 0.020 |
| c              | 0.18        | 0.27  | 0.007     | 0.011 |
| D              | 9.90        | 10.50 | 0.390     | 0.413 |
| E              | 5.10        | 5.45  | 0.201     | 0.215 |
| e              | 1.27 BSC    |       | 0.050 BSC |       |
| H <sub>E</sub> | 7.40        | 8.20  | 0.291     | 0.323 |
| L              | 0.50        | 0.85  | 0.020     | 0.033 |
| L <sub>E</sub> | 1.10        | 1.50  | 0.043     | 0.059 |
| M              | 0°          | 10°   | 0°        | 10°   |
| Q <sub>1</sub> | 0.70        | 0.90  | 0.028     | 0.035 |
| Z              | ---         | 1.42  | ---       | 0.056 |

## MC74HC14A

勝 特 力 材 料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**ON Semiconductor** and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

### PUBLICATION ORDERING INFORMATION

#### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 61312, Phoenix, Arizona 85062-1312 USA  
**Phone:** 480-829-7710 or 800-344-3860 Toll Free USA/Canada  
**Fax:** 480-829-7709 or 800-344-3867 Toll Free USA/Canada  
**Email:** [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

**N. American Technical Support:** 800-282-9855 Toll Free  
USA/Canada

**Japan:** ON Semiconductor, Japan Customer Focus Center  
2-9-1 Kamimeguro, Meguro-ku, Tokyo, Japan 153-0051  
**Phone:** 81-3-5773-3850

**ON Semiconductor Website:** <http://onsemi.com>

**Order Literature:** <http://www.onsemi.com/litorder>

For additional information, please contact your  
local Sales Representative.