


P-048

SERIES PRECISION PROBES SPECIFICATION SUBJECT TO CHANGE WITHOUT NOTICE

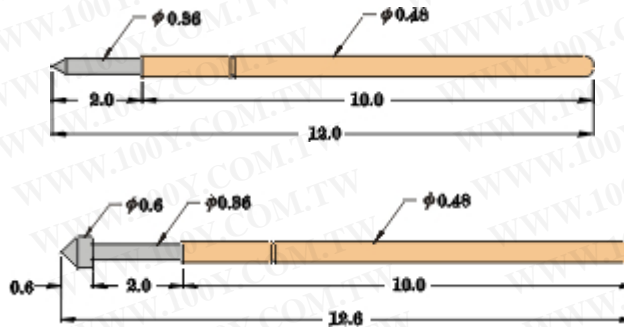

Dimensions	m/m
Mechanical life	1X10 ⁶ cycles
Plunger	SK4 (High Carbon Steel) with Rhodium Plated or Gold Plated
Barrel	Beryllium Copper or P.B.T. with Gold Plated
Spring	Music Wire with Gold Plated
Receptacle	Phosphor Bronze with Gold Plated

P-048BS	
P-048DS	
P-048ES	
P-048FS	

R-048VS((W))	R-048R[C]((W))
尾端導線：銅線或焊線 (Receptacle with Terminal Wire: Crimping or Soldering) Wire Length: 700mm or 800mm	

Recommended Board Material & Hole Size	
Acrylic	0.60mm
Bakelite	0.653mm
Fiber Reinforce Plastic	0.65mm

Min. Center	Full Stroke	Full Stroke Spring Force (620%)	2/3 Stroke Spring Force (620%)	Current Rating	Contact Resistance
0.9mm	2.0mm	60g	45g	1A	30 mΩ