


PC-BOARDS

AT-BUS

FEATURES OF AT-BUS SERIES BOARDS

- Standard AT-BUS Prototyping board.
- Primary Edge connector, 31x2 contacts on 0.1" centers.
- Secondary Edge connector, 18x2 contacts on 0.1" centers.
- Edge connector, 31x2 contacts on 0.1" centers.
- Edge connector Height-----5/16" (9mm)
- Board Length-----7-1/8" (181mm)
- Board Width-----4" (102mm)
- Double Sided
- Pad-per-Hole
- Power buses
- Space reserved for 1 D-type connectors, 25-pin

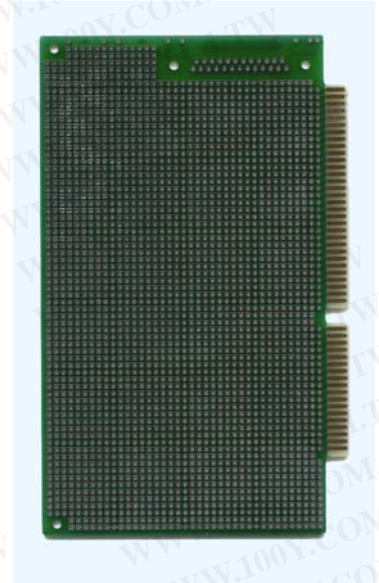

STANDARDS

- FR-4 Epoxy glass base, 0.062" thick.
- Solder-plated, 2-ounce copper.
- Durable conformal coating.
- Gold plated edge connectors.
- Plated through holes.
- Accurate silk-screening & positional markings.
- 0.042" DIA. Hole.
- 0.1" Hole spacing.

勝 特 力 材 料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)