

PC814 Series

AC Input Photocoupler

* Lead forming type (I type) and taping reel type (P type) are also available. (PC814I/PC814P)

■ Features

1. AC input
2. High isolation voltage between input and output (V : 5 000V_{rms})
3. Compact dual-in-line package
PC814 (1-channel type)
PC824 (2-channel type)
PC844 (4-channel type)
4. Current transfer ratio
 CTR : MIN. 20% at I_F = ± 1mA, V_{CE} = 5V
5. Recognized by UL, file No. E64380


■ Applications

1. Programmable controllers
2. Telephone sets, telephone exchangers
3. System appliances
4. Signal transmission between circuits of different potentials and impedances




■ Outline Dimensions

(Unit : mm)

PC814




Internal connection diagram






- ① Anode, Cathode
- ② Anode, Cathode

- ③ Emitter
- ④ Collector

PC824




Internal connection diagram



- ①③ Anode, Cathode
- ②④ Anode, Cathode
- ⑤⑦ Emitter
- ⑥⑧ Collector


PC844

Internal connection diagram



- ①③⑤⑦ Anode, Cathode
- ②④⑥⑧ Anode, Cathode
- ⑨⑪⑬⑮ Emitter
- ⑩⑫⑭⑯ Collector

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

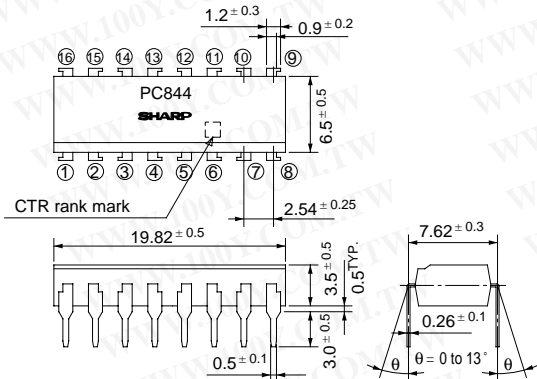

Absolute Maximum Ratings

(Ta = 25°C)

Parameter		Symbol	Rating	Unit
Input	Forward current	I _F	± 50	mA
	*1 Peak forward current	I _{FM}	± 1	A
	Power dissipation	P	70	mW
Output	Collector-emitter voltage	V _{CEO}	35	V
	Emitter-collector voltage	V _{ECO}	6	V
	Collector current	I _C	50	mA
	Collector power dissipation	P _C	150	mW
	Total power dissipation	P _{tot}	200	mW
	*2 Isolation voltage	V _{iso}	5 000	V _{rms}
Operating temperature		T _{opr}	- 30 to + 100	°C
Storage temperature		T _{stg}	- 55 to + 125	°C
*3 Soldering temperature		T _{sol}	260	°C

*1 Pulse width ≤ 100μs, Duty ratio : 0.001

*2 40 to 60% RH, AC for 1 minute

*3 For 10 seconds

Electro-optical Characteristics

(Ta = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit		
Input	Forward voltage	V _F	I _F = ± 20mA	-	1.2	1.4	V		
	Peak forward voltage	V _{FM}	I _{FM} = ± 0.5V	-	-	3.0	V		
	Terminal capacitance	C _t	V = 0, f = 1kHz	-	50	250	pF		
Output	Collector dark current	I _{CEO}	V _{CE} = 20V, I _F = 0	-	-	10 ⁻⁷	A		
Transfer characteristics	*4 Current transfer ratio	CTR	I _F = ± 1mA, V _{CE} = 5V	20	-	300	%		
	Collector-emitter saturation voltage	V _{CE(sat)}	I _F = ± 20mA, I _C = 1mA	-	0.1	0.2	V		
	Isolation resistance	R _{ISO}	DC500V, 40 to 60% RH	5 x 10 ¹⁰	10 ¹¹	-	Ω		
	Floating capacitance	C _f	V = 0, f = 1MHz	-	0.6	1.0	pF		
	Cut-off frequency	Response time	Rise time	t _r	V _{CE} = 2V, I _C = 2mA, R _L =	-	4	18	μs
			Fall time	t _f	100Ω	-	3	18	μs

*4 Classification table of current transfer ratio

Model No.	Rank mark	CTR (%)
PC814A	A	50 to 150
PC824A		
PC844A		
PC814	A or no mark	20 to 300
PC824		
PC844		

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Fig. 1 Forward Current vs. Ambient Temperature

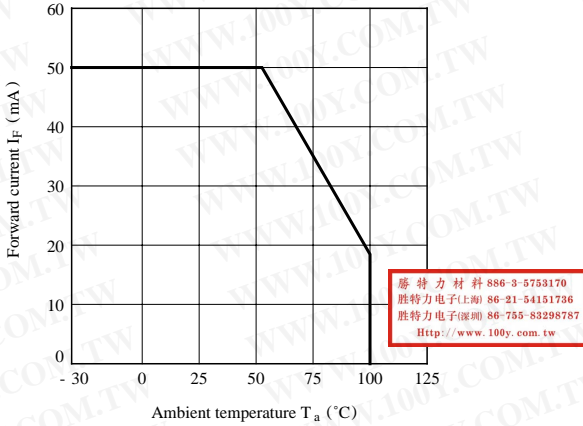


Fig. 2 Collector Power Dissipation vs. Ambient Temperature

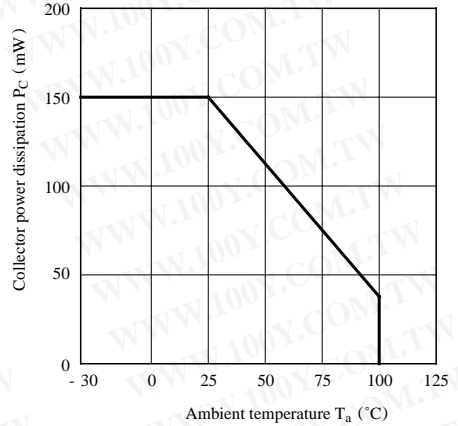


Fig. 3 Peak Forward Current vs. Duty Ratio

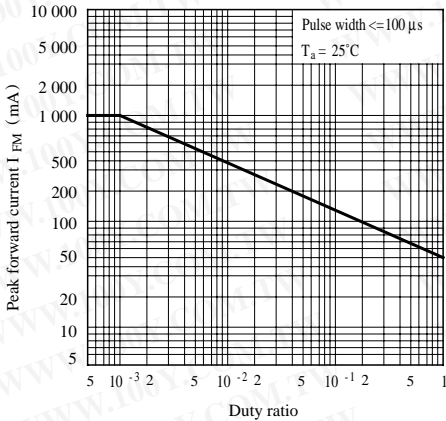


Fig. 4 Forward Current vs. Forward Voltage

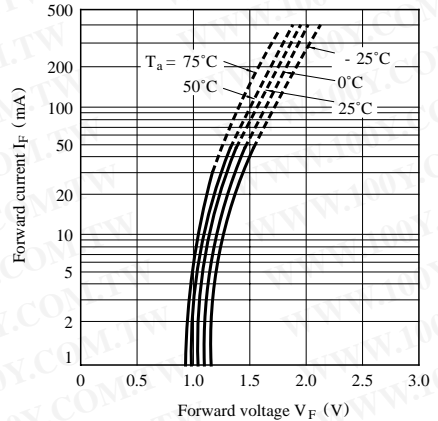


Fig. 5 Current Transfer Ratio vs. Forward Current

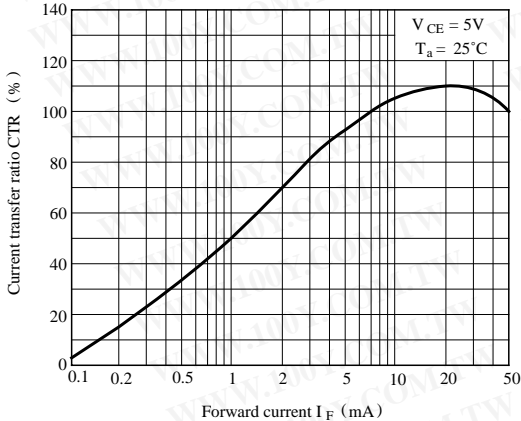


Fig. 6 Collector Current vs. Collector-emitter Voltage

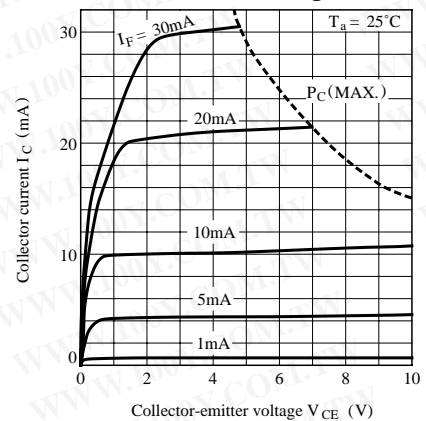


Fig. 7 Relative Current Transfer Ratio vs. Ambient Temperature

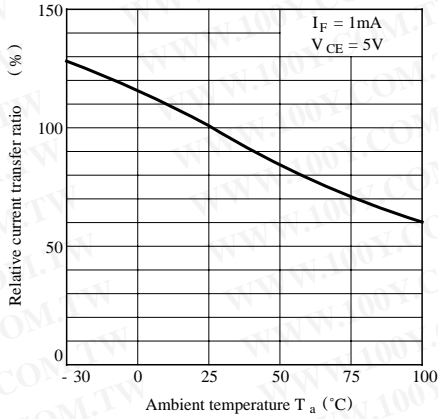


Fig. 8 Collector-emitter Saturation Voltage vs. Ambient Temperature

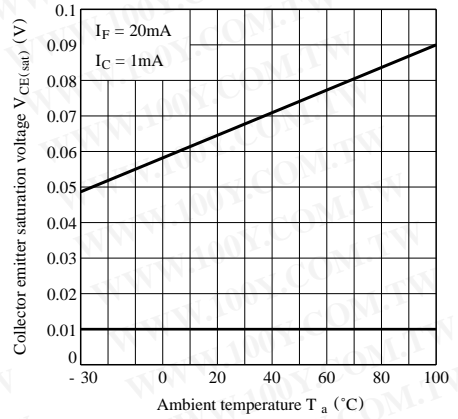


Fig. 9 Collector Dark Current vs. Ambient Temperature

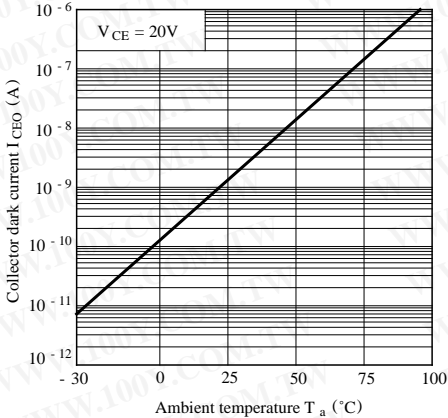


Fig.10 Response Time vs. Load Resistance



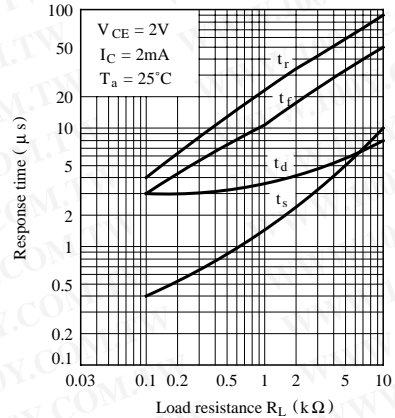


Fig.11 Frequency Response

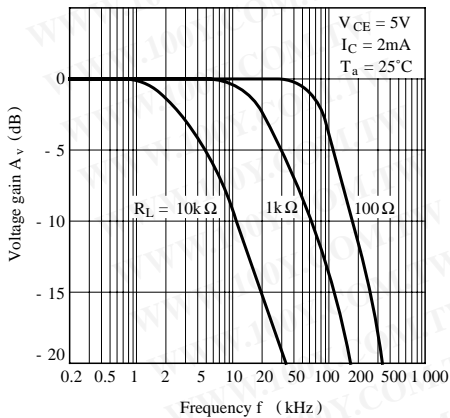


Test Circuit for Response Time

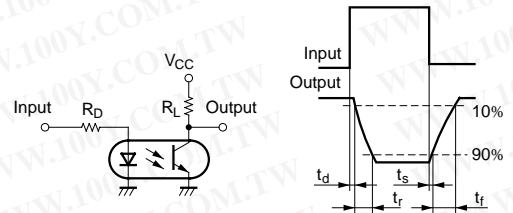


勝特力材料 86-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Fig.12 Collector-emitter Saturation Voltage vs. Forward Current

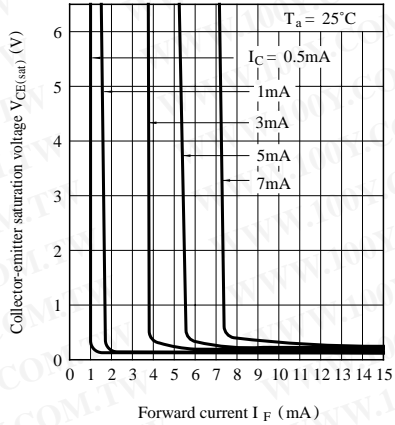

Test Circuit for Frequency Response



● Please refer to the chapter “Precautions for Use”

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)