



INDUSTRIAL PRESS-FIT POWER RECTIFIERS TYPE 35A

Features

- High Surge Capability
- High Voltage Available
- Designed For A Wide Range of Application
- Leaded Version Available
- Types Up to 1000V V_{RRM}
- Open junction


**35Amp Rectifier
50-1000 Volts**

Maximum Ratings

Operating Temperature: -65°C to $+190^{\circ}\text{C}$
Storage Temperature: -65°C to $+190^{\circ}\text{C}$

Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
PFL3501(R)	50V	35V	50V
PFL3502(R)	100V	70V	100V
PFL3503(R)	200V	140V	200V
PFL3504(R)	400V	280V	400V
PFL3505(R)	600V	420V	600V
PFL3506(R)	800V	560V	800V
PFL3507(R)	1000V	700V	1000V

**PRESS - FIT
LUCAS**

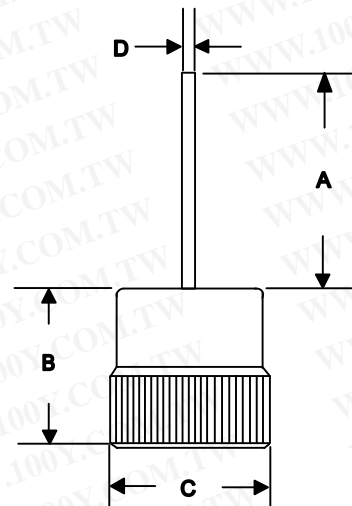

Electrical Characteristics @ 25 °C Unless Otherwise Specified

Average Forward Current	$I_{F(AV)}$	35 A	$T_C = 100^{\circ}\text{C}$
Peak Forward Surge Current	I_{FSM}	600A	8.3ms, half sine
Maximum Instantaneous Forward Voltage *	V_F	1.0V	$I_{FM} = 35A;$ $T_J = 25^{\circ}\text{C}$
Maximum Instantaneous DC Reverse Current At Rated DC Blocking Voltage	I_R	10uA 500uA	$T_J = 25^{\circ}\text{C}$ $T_J = 150^{\circ}\text{C}$
Maximum thermal resistance, junction to case	$R_{\theta jc}$	1.2 °C /w	

Notes:

1. Standard Polarity: Lead is Cathode
2. Reverse Polarity: Lead is Anode

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	0.834	0.857	21.19	21.78	
B	0.336	0.343	8.53	8.70	
C	0.398	0.400	10.11	10.16	
D	0.050	0.051	1.29	1.30	

*Pulse Test: Pulse Width 300 usec, Duty Cycle 2%

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



FIG.1- MAXIMUM FORWARD CURRENT DERATING CURVE

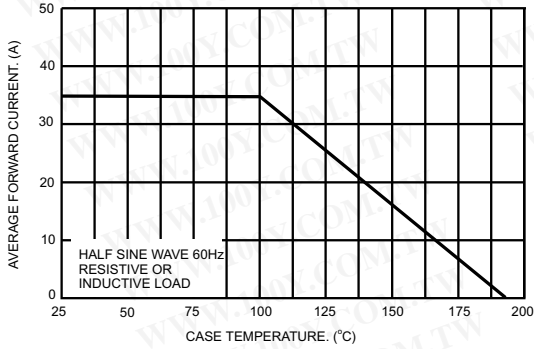


FIG.2- MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

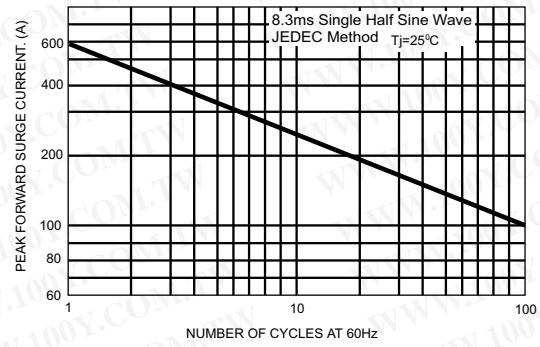


FIG.3- TYPICAL FORWARD CHARACTERISTICS


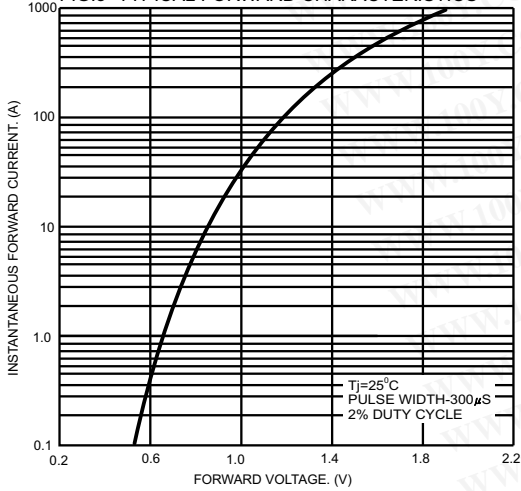


FIG.4- TYPICAL REVERSE CHARACTERISTICS

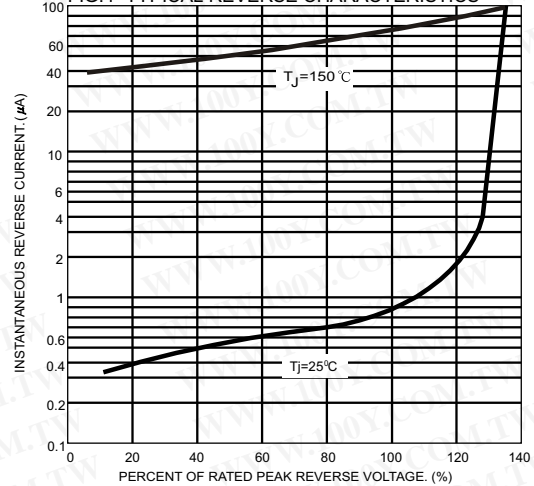

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)