

2.54MM PIN HEADER STRAIGHT TYPE

MATERIAL

Insulator : 30% Glass fiber PBT

Contact Pin : Brass

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



SPECIFICATION

Current Rate : 1 AMP


Insulation Resistance : 5000MΩ Min. at DC 50V

Contact Resistance : 20mΩ Max. at DC 100mA

Operation Temperature : -55°C to +105°C

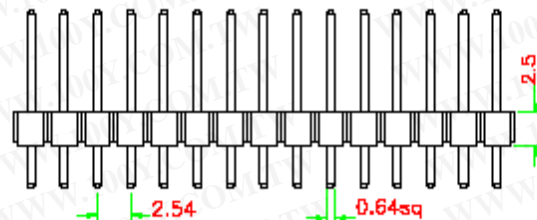

1. 3: Triple rows
 2. No. of contacts per row
 3. G: Gold flash
T: Tin plated
 4. B: Black Insulator
 5. Other dimensions, please fill out A/B/C.
- * Standard dimensions : A=11.6 B=6.1 C=3.0

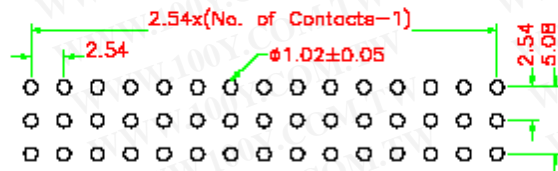

Recommended P.C.B. Layout