

2.54MM PIN HEADER STRAIGHT TYPE

MATERIAL

Insulator : 30% Glass fiber PBT


Contact Pin : Brass

勝特力材料 886-3-5753170

勝特力电子(上海) 86-21-54151736

勝特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

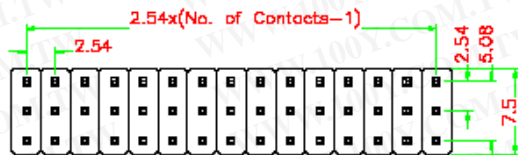

SPECIFICATION



Current Rate : 1 AMP

Insulation Resistance : 5000MΩ Min. at DC 500V

Contact Resistance : 20mΩ Max. at DC 100mA


Operation Temperature : -55°C to +105°C

ORDER INFORMATION

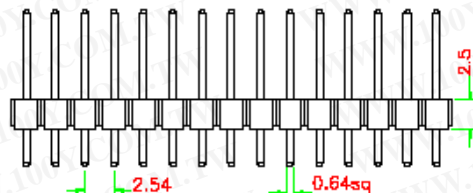

- 3: Triple rows
- No. of contacts per row
- G: Gold flash
T: Tin plated
- B: Black insulator
- Other dimensions, please fill out A/B/C.

* Standard dimensions : A=11.6 B=5.1 C=3.0

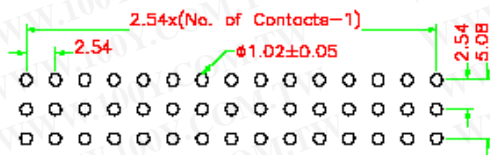

Recommended P.C.B. Layout