

## APPLICATION AND FEATURES

1. Side and end stackable.
2. Notches for easy breakable.
3. Mate with mini jumper and P.C.Board socket connectors

## SPECIFICATIONS

Current Rating : 3 Amps

Insulator resistance : 5000 Megohms Min

Dielectric withstanding : AC 500V

Operating Temperature : -40°~+105°C

Contact Material : Brass

Insulator Material : Polyester , UL 94V-0

Standard : PBT




Finish : Gold plated

Solperring Ability : 95% in 245°C+5°C

Contact Resistance : 30 Milllohms MAX

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

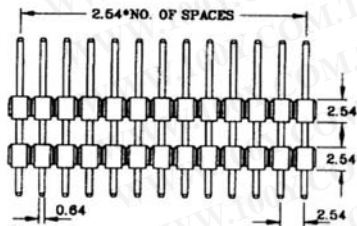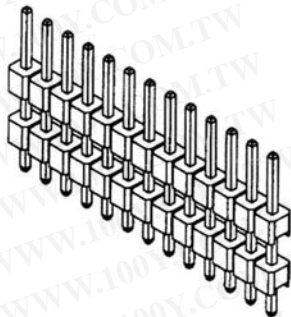

UNITS: MM

繪圖 DRAWN BY

ANDY

日期 DATE

87.9.30

檢查 CHECKED BY

WENDY

比例 SCALE





1:1

PPHSI-88-40-122

圖號 016

DRAWING NO.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

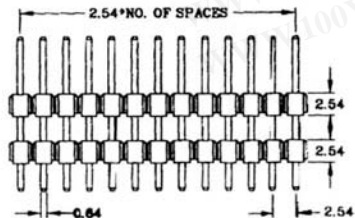

UNITS:MM

繪圖 DRAWN BY  
 ANDY  
 檢對 CHECKED BY  
 WENDY

日期 DATE  
 87.9.30  
 比例 SCALE  
 1:1

PPHS2  
 99-80-122

圖號 019  
 DRAWING NO.