


PROMOVER PRODUCTS


Shape

HS-36XX

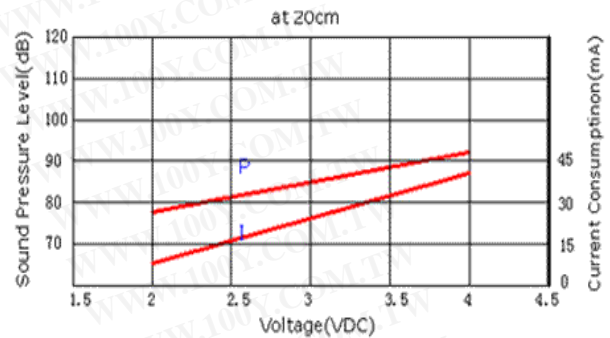

Model Number	HS-36XX							
Rated Voltage(VDC)	1.5	3	4.5	6	9	12	18	24
Operating Voltage(VDC)	1.2 ~ 2	2 ~ 4	3 ~ 6	4 ~ 8	6 ~ 12	8 ~ 16	14 ~ 22	20 ~ 28
Current Consumption Max(mA)	25	45	30	35	22	30	20	30
SPL Min. (dB) at 20cm	78	82	85	88	88	88	90	90
Resonant Frequency(Hz)	400±100							
Operating Temperature(°C)	-20~+60							
Storage Temperature(°C)	-20~+70							
Tone	Continuous Sound							
Material	ABS							

Dimension

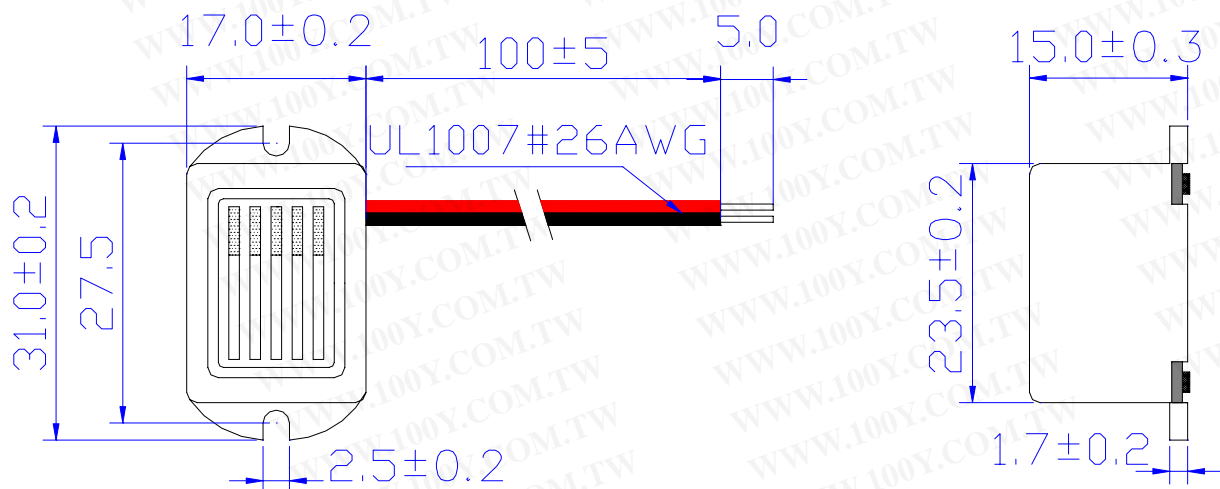

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Tolerance:±0.5 Unit:mm