




FEATURES

- MATERIAL: Frames are nylon (UL flame: 94V-2). Terminals are silver plated brass.
- Illuminated actuators are molded in PC, available with red, amber, and green colors.
- Snap-in mounting, easy to install switch into panel.
- The dimension of frame is 33.2*14, for shorter dimension of frame 31.5*14, please refer to page 1-33, item NO. R13-221.

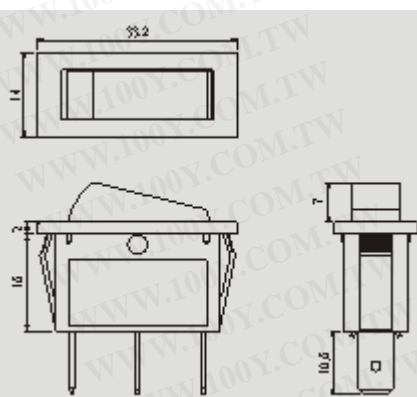

Rating

10A 125V AC
1/8HP 125VAC
10A 250V AC
1/3HP 250VAC

Contact
resistance

50mΩ Max

Insulation
resistance

DC 500V
100MΩ Min

Dielectric
strength

AC 1500V 1
minute

Cut-out

X

Y

.2-0.

7.2-0.

.2-0.



X

Y

0.75~1.25 30.2-0.1 11.2+0.1

1.25~2 30.4-0.1 11.2+0.1


2~3 30.8-0.1 11.2+0.1

R13-

ROCKER

FUNCTION





TERMINAL



0 1 .250" Quick
connect

0 5 Solder

* () = momentary



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)