


# FULLY INSULATED RECEPTACLE DISCONNECTORS

1. MAXIMUM ELECTRICAL RATING :  
75 °C 300 VOLTS MAX
2. MAXIMUM ELECTRIC CURRENT :  
22~16 AWG / 0.5~1.5 mm<sup>2</sup> : 10 AMPERE  
16~14 AWG / 1.5~2.5 mm<sup>2</sup> : 15 AMPERE  
12~10 AWG / 4 ~ 6 mm<sup>2</sup> : 24 AMPERE
3. TERMINAL MATERIAL : BRASS
4. INSULATED MATERIAL : VINYL (PVC)



WIRE RANGE	AWG / mm <sup>2</sup>	ITEM NO.	DIMENSIONS inch (mm)					
			B	F	L	E	D	d1
22~16 AWG	0.5~1.5 mm <sup>2</sup>	RE1-4VF	.157 (4.0)	.335 (8.5)	.906 (23.0)	.394 (10.0)	.157 (4.0)	.067 (1.7)
16~14 AWG	1.5~2.5 mm <sup>2</sup>	RE2-4VF						
		RE2-5VF						
12~10 AWG	4~6 mm <sup>2</sup>	RE5-5VF	.197 (5.0)		.984 (25.0)	.492 (12.5)	.217 (5.5)	.134 (3.4)


**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-54151736**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

圖號. DRAWING. NO: FP3RE-VF

校訂版次 REVISIONS

品名 NAME: RECEPTACLE ITEM NO.:

版次	記述 DESCRIPTION	DATE	核可
1	修改L尺寸原23.5, 修改為23.0	97.05.13	ANDY



NOTE:

MAXIMUM ELECTRICAL RATING: 75 °C 300 VOLTS

RE1-4VF

1. WIRE RANGE: AWG 22-16/0.5-1.5mm<sup>2</sup>: 10 AMPERE MAX.

2. INSULATED COLOR: RED

RE2-4VF RE2-5VF


1. WIRE RANGE: AWG 16-14/1.5-2.5mm<sup>2</sup>: 15 AMPERE MAX.

2. INSULATED COLOR: BLUE

RE5-5VF

1. WIRE RANGE: AWG 12-10/4-6mm<sup>2</sup>: 24 AMPERE MAX.

2. INSULATED COLOR: YELLOW

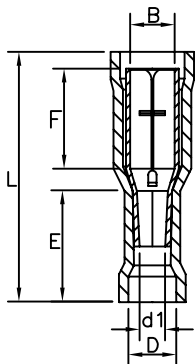

產品編號 ITEM NO.	B ±0.20	L ±1.00	E ±0.60	F ±0.50	D ±0.30	d1 ±0.20
RE1-4VF	4.0	23.0	11.0	9.0	4.0	1.7
RE2-4VF	4.0	23.0	11.0		4.5	2.3
RE2-5VF	5.0	23.5	11.0		4.5	2.3
RE5-5VF	5.0	25.5	12.5		5.5	3.4

認可 APPROVALS

第三視角

THIRD VIEW

MATERIAL

單位UNITE

製圖 DRAFT: Den

INSULATION: VINYL

m/m

設計 DESIGN: 劉' r

MATERIAL: BRASS

比例SCALE

核可 CHECKED: Chen

TIN PLATING

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

