

CR2016

3V Lithium Battery
Swiss Made

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Technical Data Sheet

Specifications

Chemical System	Li / MnO ₂
Nominal Voltage	3 V
Rated Capacity	80 mAh
Standard Discharge Current	0,2 mA
Max. Cont. Discharge Current	3,5 mA
Average Weight	1,7 g
Temperature Range	-30 - +70 °C
Self Discharge at 23°C	< 1% / year


Dimensions

(According to IEC 60086)

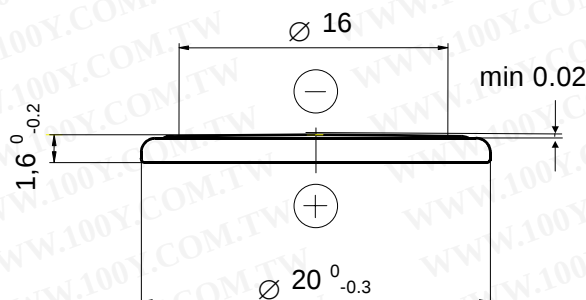


Performance


Discharge performance at 23°C

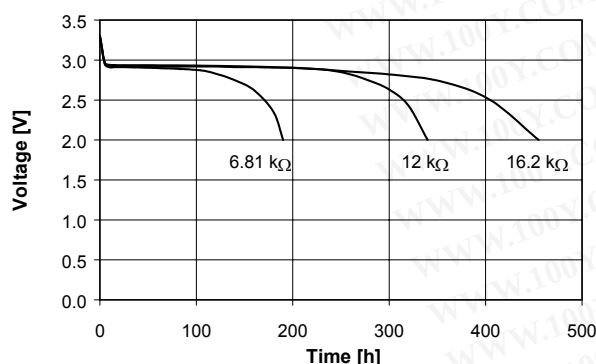


Discharge performance at 23°C

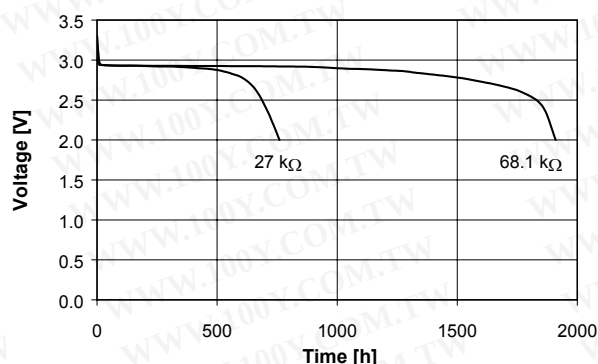

Temperature performance Load 27kΩ

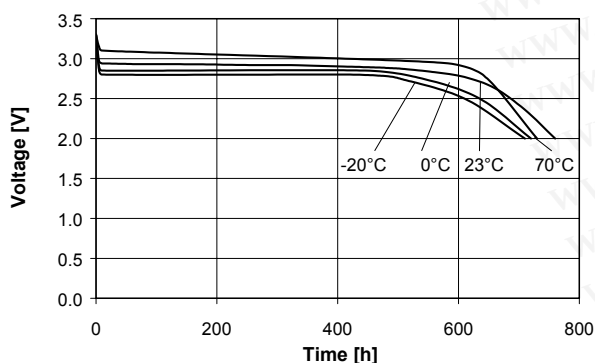

Cell capacity at various loads

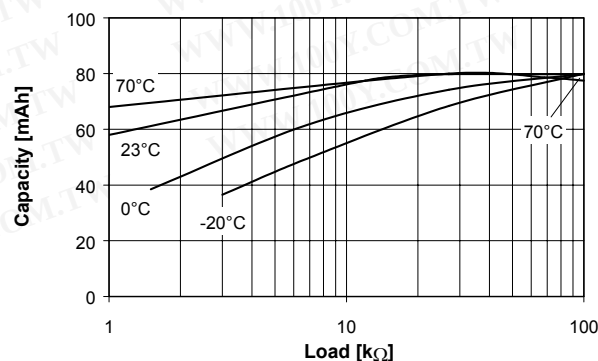

Rev. CR2016.04 10/01