


# Power Modules

## Power Modules Horizontal Versions for Soldering (cont.)

Without decoupling diodes

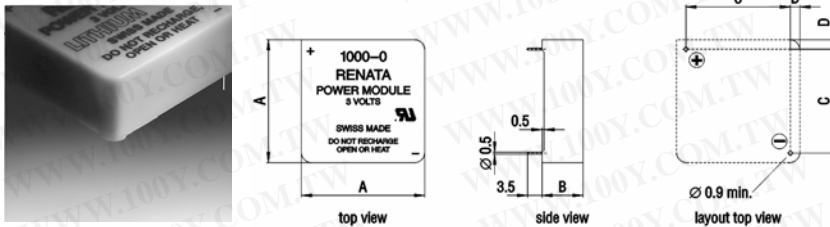

RENATA Part name	RENATA Part number	Nominal capacity (mAh)	Nominal voltage (V)	Encapsulated cell	Weight (g)	Maximum dimensions (mm)			
						A	B	C	D
<b>175-0</b>	<b>700040</b>	<b>235</b>	<b>3</b>	<b>CR2032</b>	<b>6.5</b>	<b>22.0</b>	<b>8.0</b>	<b>17.8</b>	<b>15.3</b>
<b>1000-0</b>	700031	950	3	CR2477N	15.0	30.0	10.0	25.4	22.9

Operating temperature range: -40°C to +85°C  
 Self-discharge rate: less than 1% per year at 25°  
 Specifications - module housings: polyamide 66  
 - soldering contacts: Isotan (55% Cu, 44% Ni-Mn)

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## 3V Lithium Batteries

# Safety Approval of RENATA Lithium Products

Underwriter Laboratories Inc., Northbrook/IL/USA has approved under the file number MH 14002 the following RENATA Lithium products as user replaceable:

### Button Cells

CR1025		
CR1216	CR1220	CR1225
CR1616	CR1620	CR1632
CR2016	CR2025	CR2032
CR2320	CR2325	CR2430
CR2450	CR2450N	



### Power Modules

175-0	175-0B
175-2	1000-1
1000-0B	1000-1B
1000-0	

### Encapsulated Batteries

338A

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)