



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


RPL.RP Series Piano Type Dip Switch

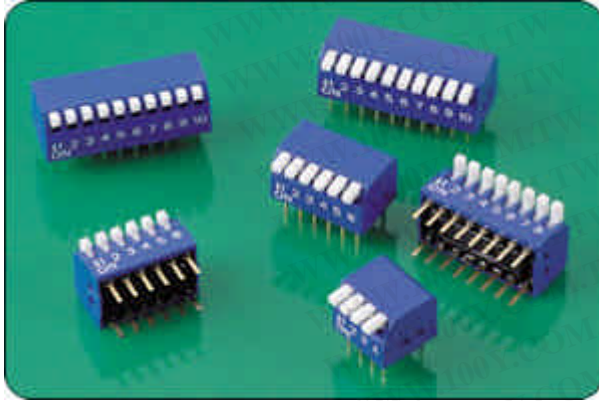

P.C.B. LAYOUT

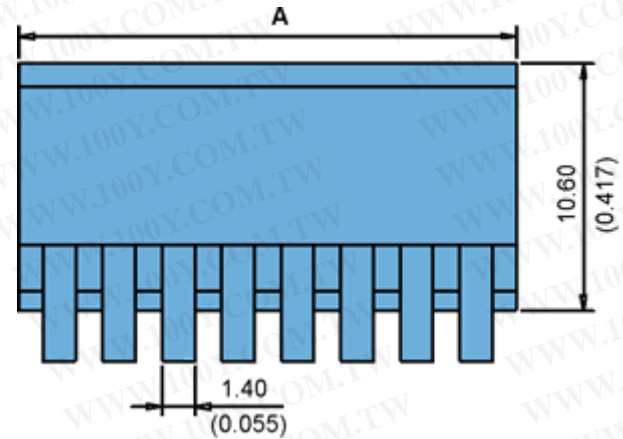



RPL & RP CONSTRUCTION

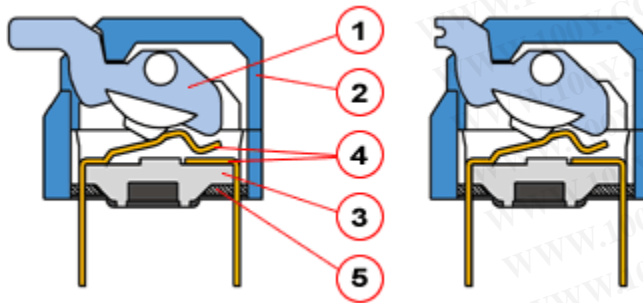

RPL series

RP series

1. Terminal plating by gold gives excellent results when soldering.
2. RPL series (raised actuator) and RP series (recessed actuator)
3. Low contact resistance, and self-clean on contact area.
4. Double contacts offer high reliability.
5. All materials are UL94V-0 grade fire retardant plastics.

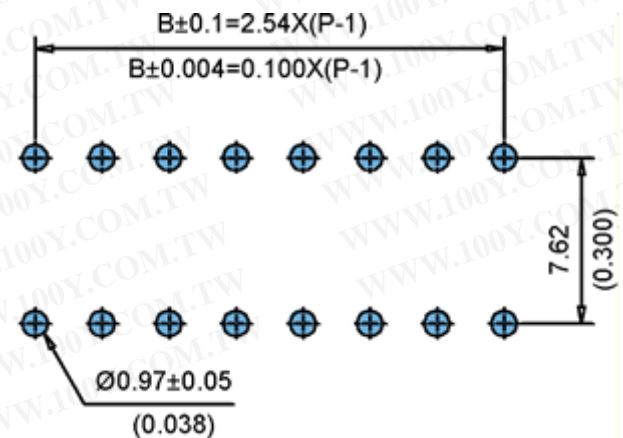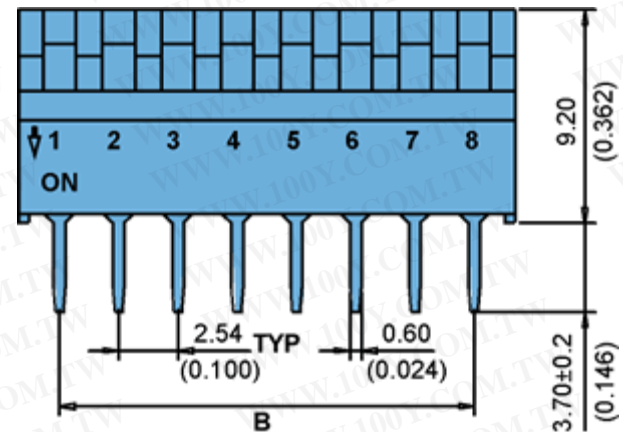


ITEM	Description	Materials	Treatment
1	Actuator	UL94V-0 PBT Thermoplastic	White
2	Cover	UL94V-0 PBT Thermoplastic	Blue, Red, Black
3	Base	UL94V-0 PBT Thermoplastic	Black
4	Terminal	Phosphor bronze	Gold Plating
5	Potting	Epoxy	Black

CIRCUIT DIAGRAM

MODEL

PROD NO.	NO. OF POS	DIM A	
RPL/RP-02	02	6.26	0.246
RPL/RP-03	03	9.06	0.357
RPL/RP-04	04	11.34	0.446
RPL/RP-05	05	13.88	0.546
RPL/RP-06	06	16.42	0.646
RPL/RP-08	08	21.5	0.846
RPL/RP-10	10	26.58	1.046
RPL/RP-12	12	31.6	1.244


HOW TO ORDER

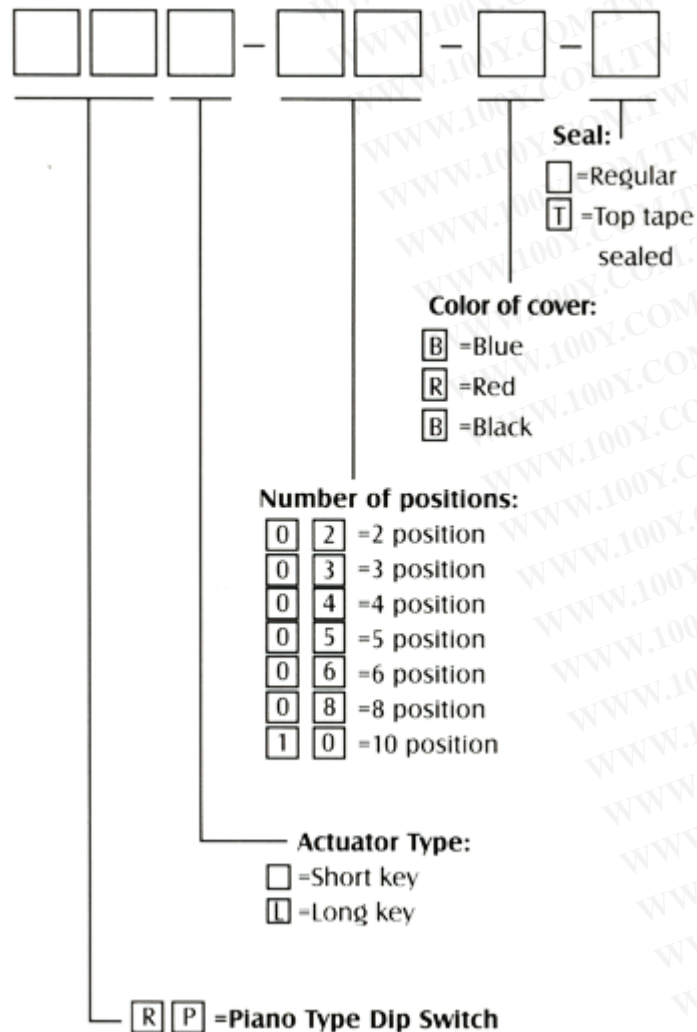


Example: RPL-08-B-T is a Piano Type Dip Switch, Long key, 8 position with top tape sealed.

PACKING All Dip Switches are shipped in standard IC tubes with all poles in "OFF" position.

CARRIER TAPE PACKING

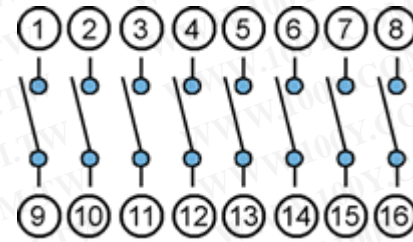

TERMINAL TYPE

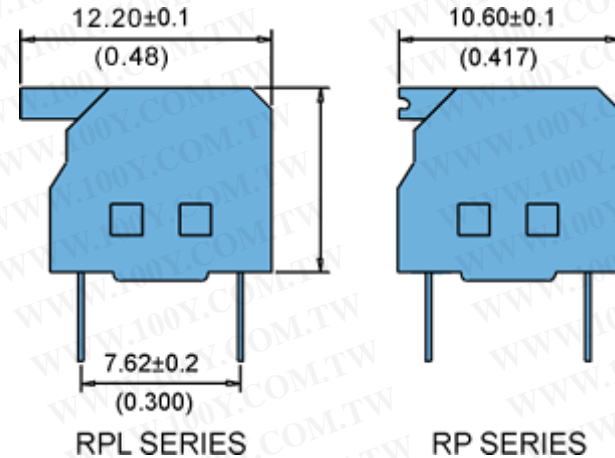

SPECIFICATION

ELECTRICAL

Electrical life: 2000 operation cycles per switch 24VDC, 25mA.
Non-Switching Rating: 100mA, 50 VDC
Switching Rating: 25mA, 24VDC.
Contact resistance: (a) 50m Ω max. at initial
(b) 100m Ω max. after life test.
Insulation resistance: 100M Ω min. (at 500VDC)
Dielectric Strength: 500VAC/1 minute.
Capacitance: 5pF max.
Circuit: Single pole single throw.

MECHANICAL

Mechanical life: 2000 operations per cycle switch
Operation Force: 400gf max.
Stroke: 2.0mm
Operation Temp: -25 $^{\circ}$ C to +70 $^{\circ}$ C
Storage Temp: -40 $^{\circ}$ C to +85 $^{\circ}$ C
Vibration Test: MIL-STD-202F METHOD 201A
Frequency: 10-55-10Hz/1 min
Directions: X, Y, Z, three mutually perpendicular directions.
Time: 2 hours each direction.
High reliability.

Shock Test: MIL-STD-202F METHOD 213B.


CONDITION A

GRAVITY: 50G (peak value), 11 m/sec.
Direction and times: 6 sides and three times in each direction. High reliability.

SOLDERING AND CLEANING PROCESSES

For best results, please follow these recommendations: Keep all switch contacts in their "OFF" position for all operations.

WAVE SOLDERING: Recommended solder temperature at 500 F (260 $^{\circ}$ C) max. 5 seconds.

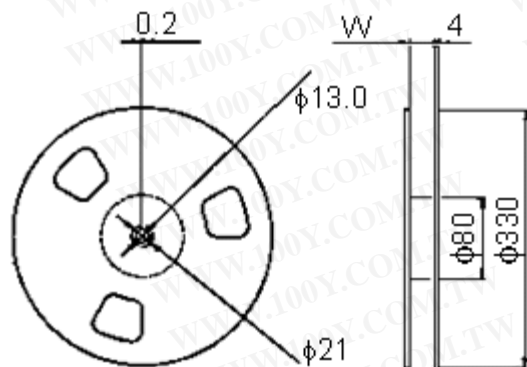

HAND SOLDERING: Use a soldering iron of 30 watts, controlled at 608 F(320 °C) approximately 2 seconds while applying solder.

CLEANING PROCESS: Flux clean using force rinse, high agitation or triple bath cleaning method. Freon TF or TE give excellent results. When vapor methods are used, do not subject the switch to solvents at temperatures above 125 F (51 °C).

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)