


RVJ Vertical Chip Electrolytic Capacitors

Series RVJ Chip Aluminum Electrolytic Capacitors.

- For surface mount 105°C, large capacitance type.
- Carrier taping supplied.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Outline Drawing

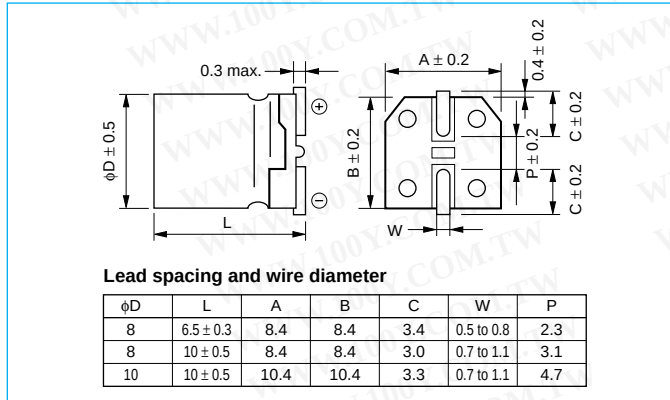

Unit: mm

Photo



Specifications

No.	Item	Performance																													
1	Temperature range (°C)	−55 to +105°C																													
2	Leakage current (μA)	Less than 0.01 CV or 3 whichever is larger (after two minutes) C: Capacitance (μF), V: Voltage (V) (20°C)																													
3	Capacitance tolerance (%)	±20 (20°C, 120 Hz)																													
4	Tangent of loss angle (tan δ)	<table><tr><td colspan="2">Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td colspan="2">tan δ</td><td>0.30</td><td>0.26</td><td>0.22</td><td>0.16</td><td>0.13</td><td>0.12</td><td>0.11</td><td>0.10</td></tr></table> (20°C, 120 Hz)	Rated voltage (V)		6.3	10	16	25	35	50	63	100	tan δ		0.30	0.26	0.22	0.16	0.13	0.12	0.11	0.10									
Rated voltage (V)		6.3	10	16	25	35	50	63	100																						
tan δ		0.30	0.26	0.22	0.16	0.13	0.12	0.11	0.10																						
5	Stability at low temperature	<table><tr><td colspan="2">Rated voltage (V)</td><td>6.3</td><td>10</td><td>16</td><td>25</td><td>35</td><td>50</td><td>63</td><td>100</td></tr><tr><td rowspan="2">Impedance ratio</td><td>Z−25°C/Z+20°C</td><td>4</td><td>3</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td><td>2</td></tr><tr><td>Z−40°C/Z+20°C</td><td>8</td><td>5</td><td>4</td><td>3</td><td>3</td><td>3</td><td>3</td><td>3</td></tr></table> (120 Hz)	Rated voltage (V)		6.3	10	16	25	35	50	63	100	Impedance ratio	Z−25°C/Z+20°C	4	3	2	2	2	2	2	2	Z−40°C/Z+20°C	8	5	4	3	3	3	3	3
Rated voltage (V)		6.3	10	16	25	35	50	63	100																						
Impedance ratio	Z−25°C/Z+20°C	4	3	2	2	2	2	2	2																						
	Z−40°C/Z+20°C	8	5	4	3	3	3	3	3																						
6	Endurance (105°C) (Applied ripple current)	<table><tr><td>Test time</td><td>2000 hrs</td></tr><tr><td>Leakage current</td><td>Initial specified value or less</td></tr><tr><td>Change in capacitance</td><td>Within ±20% of initial value</td></tr><tr><td>tan δ</td><td>200% or less of initial specified value</td></tr></table>	Test time	2000 hrs	Leakage current	Initial specified value or less	Change in capacitance	Within ±20% of initial value	tan δ	200% or less of initial specified value																					
Test time	2000 hrs																														
Leakage current	Initial specified value or less																														
Change in capacitance	Within ±20% of initial value																														
tan δ	200% or less of initial specified value																														
7	Max. storage temp. (105°C)	Test time 1000 hrs. Others have same as endurance. Voltage application treatment.																													
8	Applicable Standards	JIS C 5101-1, 5101-18 1998 (IEC 60384-1 1992, 60384-18 1993)																													

Coefficients of Frequency for Ripple Current

Frequency (Hz)	50 • 60	120	1 k	10 k • 100 k
Rated Voltage (V)				
6.3 to 16	0.80	1	1.15	1.25
25 to 35	0.80	1	1.25	1.40
50 to 63	0.80	1	1.35	1.50
100	0.70	1	1.35	1.50

Coefficients of Temperature for Ripple Current

Temperature (°C)	+70 or less	+85	+105
Coefficients	2.1	1.75	1

RVJ Vertical Chip Electrolytic Capacitors

Case size by working voltage & capacitance (in mm)

(mm)

WV(V) Cap.(μF)	6.3	10	16	25	35	50	63	100
10								8 x 10
22						8 x 6.5	8 x 10	10 x 10
33					8 x 6.5	8 x 10	10 x 10	
47				8 x 6.5	8 x 10	8 x 10	10 x 10	
100		8 x 6.5	8 x 6.5 8 x 10	8 x 10	10 x 10	10 x 10		
220	8 x 10	8 x 10	10 x 10	10 x 10	10 x 10			
330	8 x 10	10 x 10	10 x 10	10 x 10				
470	10 x 10	10 x 10	10 x 10					

Standard Ratings

ELNA PART NO. / WV (V)	CAP. (μF)	SIZE (φ x L) (mm)	tan δ	ESR (Ω)	Ripple Current (mA rms)
6.3 V					
RVJ-6V221MG10-R	220	8 x 10	0.30	0.50	178
RVJ-6V331MG10-R	330	8 x 10	0.30	0.50	178
RVJ-6V471MH10-R	470	10 x 10	0.30	0.30	324
10 V					
RVJ-10V101MG68-R	100	8 x 6.5	0.26	1.2	110
RVJ-10V221MG10-R	220	8 x 10	0.26	0.50	178
RVJ-10V331MH10-R	330	10 x 10	0.26	0.30	324
RVJ-10V471MH10-R	470	10 x 10	0.26	0.30	324
16 V					
RVJ-16V101MG68-R	100	8 x 6.5	0.22	1.2	110
RVJ-16V101MG10-R	100	8 x 10	0.22	0.50	178
RVJ-16V221MH10-R	220	10 x 10	0.22	0.30	324
RVJ-16V331MH10-R	330	10 x 10	0.22	0.30	324
RVJ-16V471MH10-R	470	10 x 10	0.22	0.30	324
25 V					
RVJ-25V470MG68-R	47	8 x 6.5	0.16	1.2	110
RVJ-25V101MG10-R	100	8 x 10	0.16	0.50	178
RVJ-25V221MH10-R	220	10 x 10	0.16	0.30	324
RVJ-25V331MH10-R	330	10 x 10	0.16	0.30	324

ELNA PART NO. / WV (V)	CAP. (μF)	SIZE (φ x L) (mm)	tan δ	ESR (Ω)	Ripple Current (mA rms)
35 V					
RVJ-35V330MG68-R	33	8 x 6.5	0.13	1.2	110
RVJ-35V470MG10-R	47	8 x 10	0.13	0.50	178
RVJ-35V101MH10-R	100	10 x 10	0.13	0.30	324
RVJ-35V221MH10-R	220	10 x 10	0.13	0.30	324
50 V					
RVJ-50V220MG68-R	22	8 x 6.5	0.12	1.2	110
RVJ-50V330MG10-R	33	8 x 10	0.12	0.50	178
RVJ-50V470MG10-R	47	8 x 10	0.12	0.50	178
RVJ-50V101MH10-R	100	10 x 10	0.12	0.30	324
63 V					
RVJ-63V220MG10-R	22	8 x 10	0.11	1.0	99
RVJ-63V330MH10-R	33	10 x 10	0.11	0.65	160
RVJ-63V470MH10-R	47	10 x 10	0.11	0.65	160
100 V					
RVJ-100V100MG10-R	10	8 x 10	0.10	1.2	67
RVJ-100V220MH10-R	22	10 x 10	0.10	0.78	133

Note: ESR 100 kHz at 20°C
Allowable Ripple Current 120 Hz at 105°C

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)