


SB120 THRU SB160

SCHOTTKY BARRIER RECTIFIER

Reverse Voltage - 20 to 60 Volts Forward Current - 1.0 Ampere

DO-204AL

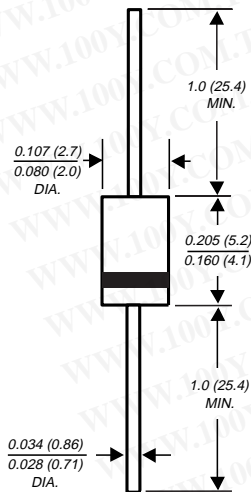

Dimensions in inches and (millimeters)

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classifications 94V-0
- ◆ Metal silicon junction, majority carrier conduction
- ◆ Low power loss, high efficiency
- ◆ High current capability, low forward voltage drop
- ◆ High surge capability
- ◆ Guardring for overvoltage protection
- ◆ For use in low voltage, high frequency inverters, free wheeling, and polarity protection applications
- ◆ High temperature soldering guaranteed: 250°C/10 seconds, 0.375" (9.5mm) lead length, 5lbs. (2.3 kg) tension



MECHANICAL DATA

Case: JEDEC DO-204AL molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.012 ounce, 0.34 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	SB120	SB130	SB140	SB150	SB160	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	20	30	40	50	60	Volts
Maximum RMS voltage	V_{RMS}	14	21	28	35	42	Volts
Maximum DC blocking voltage	V_{DC}	20	30	40	50	60	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length (SEE FIG.1)	$I_{(AV)}$	1.0					Amp
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	40.0					Amps
Maximum instantaneous forward voltage at 1.0A (NOTE 1)	V_F	0.50			0.70		Volts
Maximum instantaneous reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ (NOTE 1) $T_A=100^\circ\text{C}$	I_R	10.0			5.0		mA
Typical thermal resistance (NOTE 2)	$R_{\theta JA}$ $R_{\theta JL}$	50.0 15.0					$^\circ\text{C/W}$
Operating junction temperature range	T_J	-65 to +125			-65 to +150		$^\circ\text{C}$
Storage temperature range	T_{STG}	-65 to +150					$^\circ\text{C}$

NOTES:

(1) Pulse test: 300µs pulse width, 1% duty cycle

(2) Thermal resistance junction to lead P.C.B. mounted 0.375" (9.5mm) lead length

RATINGS AND CHARACTERISTIC CURVES SB120 THRU SB160

FIG. 1 - FORWARD CURRENT DERATING CURVE

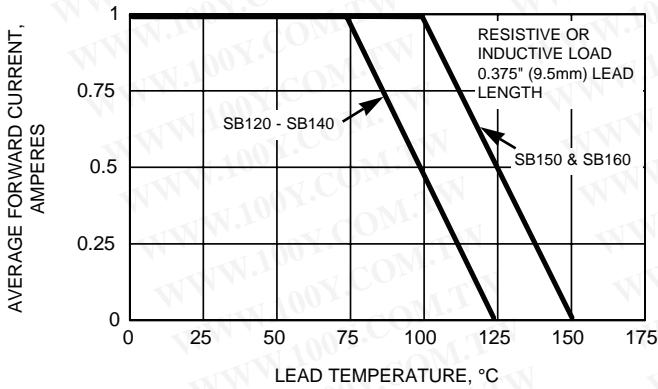


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

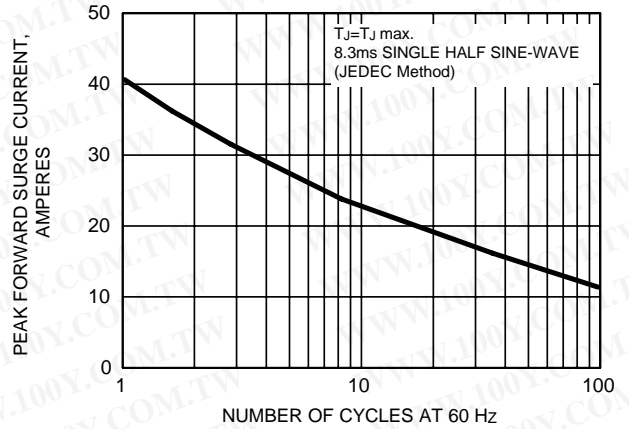


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

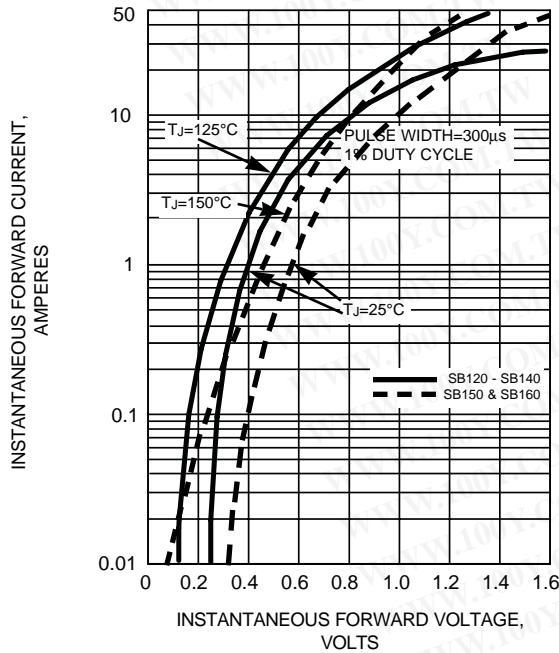


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

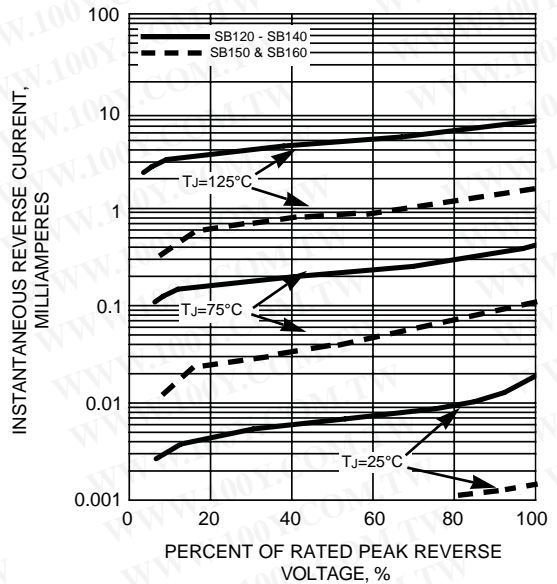


FIG. 5 - TYPICAL JUNCTION CAPACITANCE


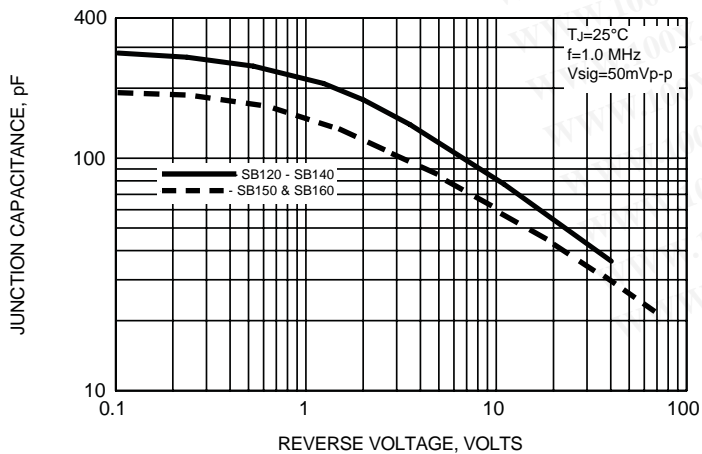


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE

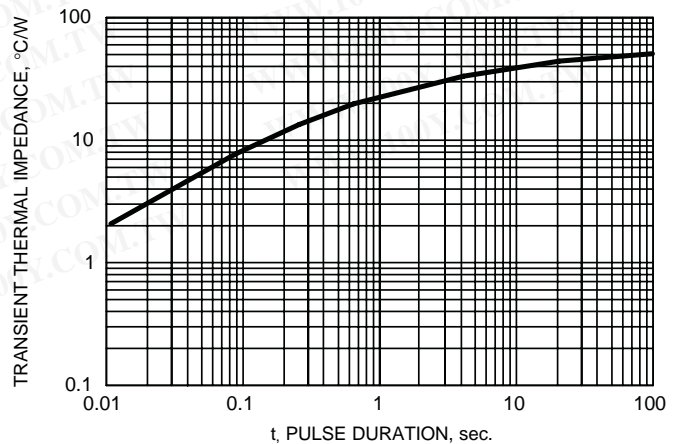

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)