

# SB22 THRU SB2A0

## SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

### FEATURES:

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Low profile package
- Built-in strain relief
- Metal silicon junction, majority carrier conduction
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High surge capability
- For use in low voltage high frequency inverters, free wheeling, and polarity protection applications
- Guard ring for overvoltage protection
- High temperature soldering guaranteed:  
250° C/10 seconds at terminals

### MECHANICAL DATA


Case : JEDEC DO-214AA molded plastic body

Terminals : Solder plated, solderable per MIL-STD-750 Method 2026

Polarity : Color band on body denotes cathode end

Weight : 0.039 grams, 0.003 ounce

### SMB/DO-214AA

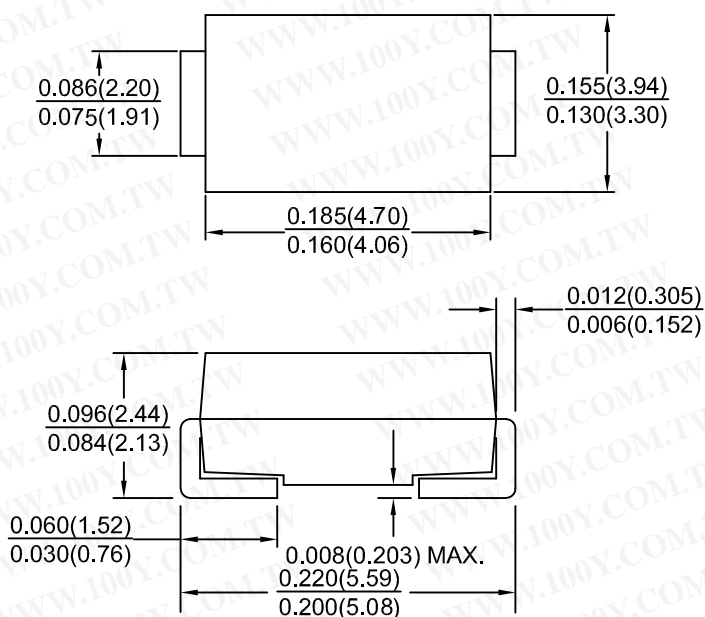

Dimensions in inches and (millimeters)

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temp. unless otherwise specified.

Single phase, half sine wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20 %.

**勝特力材料 886-3-5753170**  
**勝特力电子(上海) 86-21-54151736**  
**勝特力电子(深圳) 86-755-83298787**  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Characteristic	Symbol	SB 22	SB 23	SB 24	SB 25	SB 26	SB 28	SB 29	SB 2A0	Units
	Marking	S22	S23	S24	S25	S26	S28	S29	S2A0	
Maximum recurrent peak reverse voltage	VRRM	20	30	40	50	60	80	90	100	Volts
Maximum RMS voltage	VRMS	14	21	28	35	42	56	64	70	Volts
Maximum DC blocking voltage	VDC	20	30	40	50	60	80	90	100	Volts
Maximum average forward rectified current	I(AV)	2.0								Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load(JEDEC Method)	IFSM	50 ̑								Amps
Maximum instantaneous forward voltage drop at 2.0 A(NOTE 1)	VF	0.5	0.55	0.70			0.85			Volts
Maximum instantaneous reverse current at rated DC blocking voltage (NOTE 1)	IR	0.5 20.0								mA
Maximum thermal resistance (NOTE 2)	Rth-JA Rth-JL	75.0 17.0								°C/W
Operating junction temperature range	TJ	-65 to +150								°C
Storage temperature range	Tstg	-65 to +150								°C

#### NOTES:

(1) Pulse test: 300 ̑ s pulse width, 1% duty cycle

(2) P.C.B. mounted with 0.2x0.2"(5.0x5.0mm) copper pad areas

# RATINGS AND CHARACTERISTIC CURVES SB22 THRU SB2A0

FIG.1 - FORWARD CURRENT DERATING CURVE

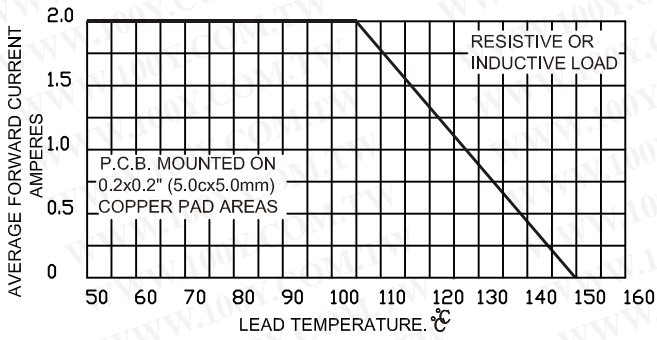


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

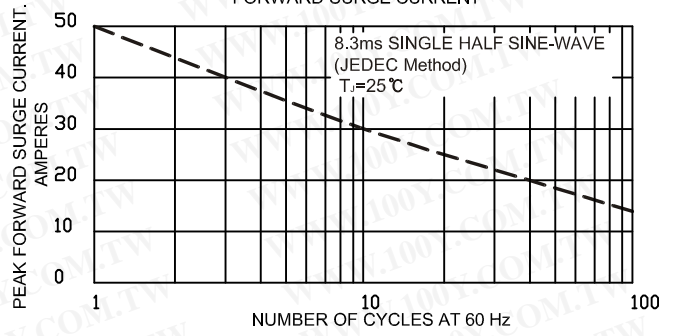


FIG.3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

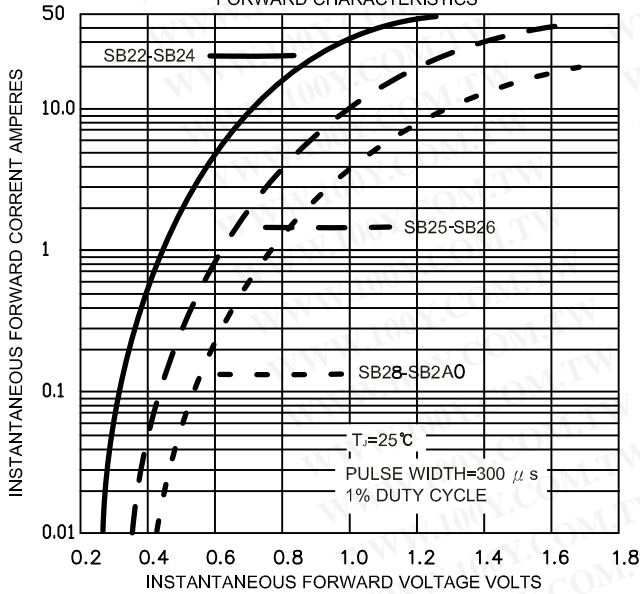


FIG.4 - TYPICAL REVERSE CURRENT CHARACTERISTICS


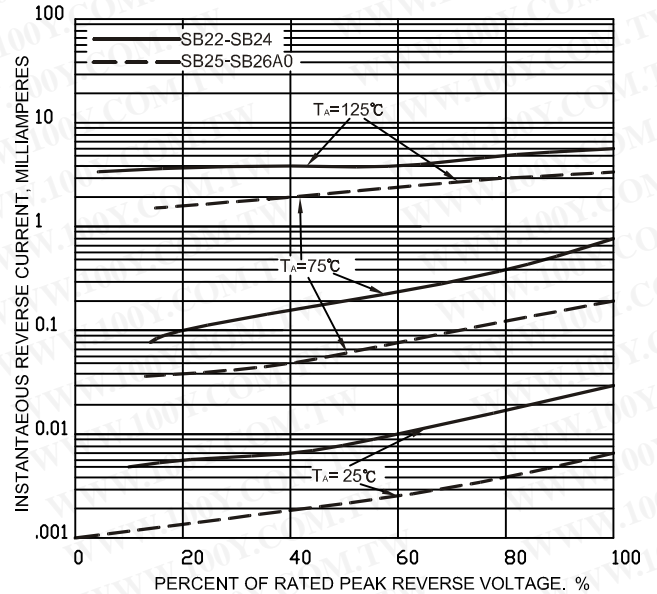


FIG.5 - TYPICAL JUNCTION CAPACITANCE

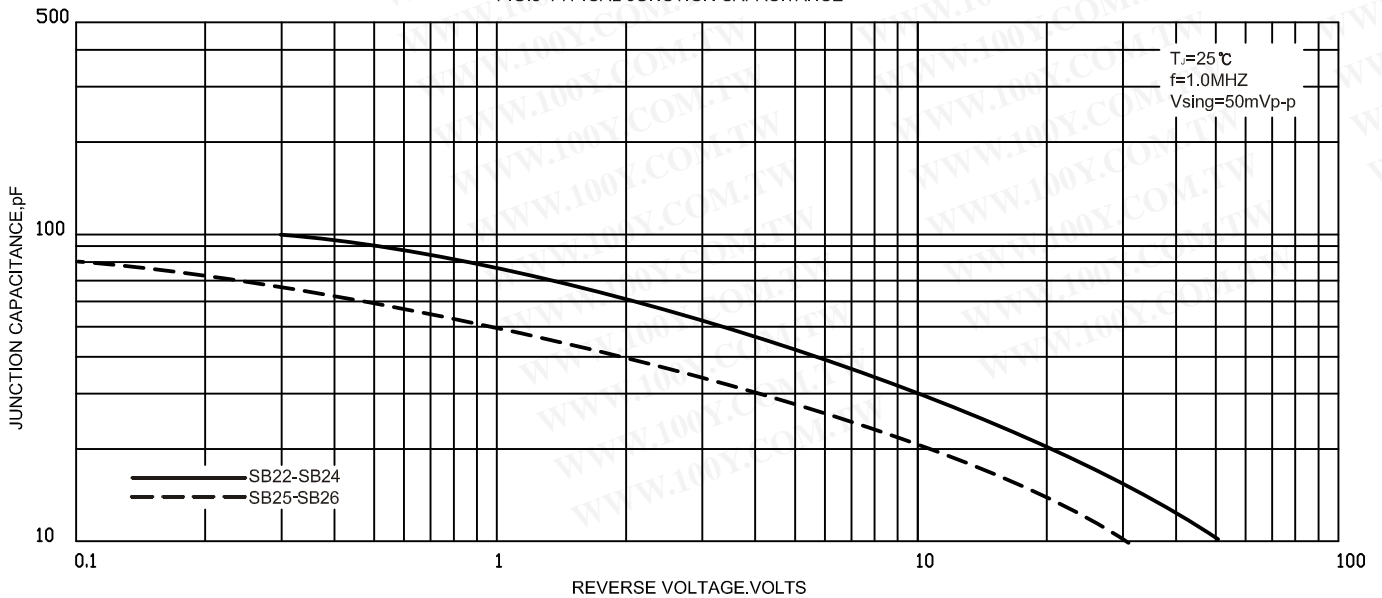

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)