

SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS



SC Chip type, High CV Series




- Chip type higher capacitance in larger case sizes
- Designed for surface mounting on high density PC board
- Applicable to automatic mounting machine using carrier tape



Item	Characteristics																								
Operating temperature range	-40 ~ +85 °C																								
Leakage current max.	I = 0.01CV or 3μA whichever is greater (after 2 minutes) I = 0.03CV (after 1 minutes)																								
Capacitance tolerance	±20% at 120Hz, 20°C																								
Dissipation factor max. (at 120Hz, 20°C)	<table border="1"> <thead> <tr> <th>WV</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50</th> <th>63</th> <th>100</th> </tr> </thead> <tbody> <tr> <td>tan δ</td> <td>0.35 (0.40)</td> <td>0.28 (0.35)</td> <td>0.20 (0.24)</td> <td>0.16 (0.20)</td> <td>0.13 (0.16)</td> <td>0.12 (0.15)</td> <td>0.09 (0.12)</td> <td>0.12</td> <td>0.12</td> </tr> </tbody> </table> <p>Figures in () are for small size, over the 6.3 × 5.8 (∅D × L)</p>	WV	4	6.3	10	16	25	35	50	63	100	tan δ	0.35 (0.40)	0.28 (0.35)	0.20 (0.24)	0.16 (0.20)	0.13 (0.16)	0.12 (0.15)	0.09 (0.12)	0.12	0.12				
WV	4	6.3	10	16	25	35	50	63	100																
tan δ	0.35 (0.40)	0.28 (0.35)	0.20 (0.24)	0.16 (0.20)	0.13 (0.16)	0.12 (0.15)	0.09 (0.12)	0.12	0.12																
Low temperature characteristics (Impedance ratio at 120Hz)	<table border="1"> <thead> <tr> <th>WV</th> <th>4</th> <th>6.3</th> <th>10</th> <th>16</th> <th>25</th> <th>35</th> <th>50 ~ 100</th> </tr> </thead> <tbody> <tr> <td>Z-25°C/Z+20°C</td> <td>6</td> <td>5</td> <td>4</td> <td>3</td> <td>2</td> <td>2</td> <td>2</td> </tr> <tr> <td>Z-40°C/Z+20°C</td> <td>12</td> <td>10</td> <td>8</td> <td>6</td> <td>4</td> <td>3</td> <td>3</td> </tr> </tbody> </table>	WV	4	6.3	10	16	25	35	50 ~ 100	Z-25°C/Z+20°C	6	5	4	3	2	2	2	Z-40°C/Z+20°C	12	10	8	6	4	3	3
WV	4	6.3	10	16	25	35	50 ~ 100																		
Z-25°C/Z+20°C	6	5	4	3	2	2	2																		
Z-40°C/Z+20°C	12	10	8	6	4	3	3																		
Load life (after application of the rated voltage for 2000 hours at 85°C)	<table border="1"> <tbody> <tr> <td>Leakage current</td> <td>Less than specified value</td> </tr> <tr> <td>Capacitance change</td> <td>Within ±20% of initial value (Small size : ±25%)</td> </tr> <tr> <td>tan δ</td> <td>Less than 200% of specified value</td> </tr> </tbody> </table>	Leakage current	Less than specified value	Capacitance change	Within ±20% of initial value (Small size : ±25%)	tan δ	Less than 200% of specified value																		
Leakage current	Less than specified value																								
Capacitance change	Within ±20% of initial value (Small size : ±25%)																								
tan δ	Less than 200% of specified value																								
Shelf life (at 85 °C)	After 1000 hours no load test, leakage current, capacitance and tan δ are same as load life value.																								
Resistance to soldering heat	<p>The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them at 250°C for 30 seconds.</p> <table border="1"> <tbody> <tr> <td>Leakage current</td> <td>Less than specified value</td> </tr> <tr> <td>Capacitance change</td> <td>Within ±10% of initial value</td> </tr> <tr> <td>tan δ</td> <td>Less than specified value</td> </tr> </tbody> </table>	Leakage current	Less than specified value	Capacitance change	Within ±10% of initial value	tan δ	Less than specified value																		
Leakage current	Less than specified value																								
Capacitance change	Within ±10% of initial value																								
tan δ	Less than specified value																								

DRAWING

Unit : mm

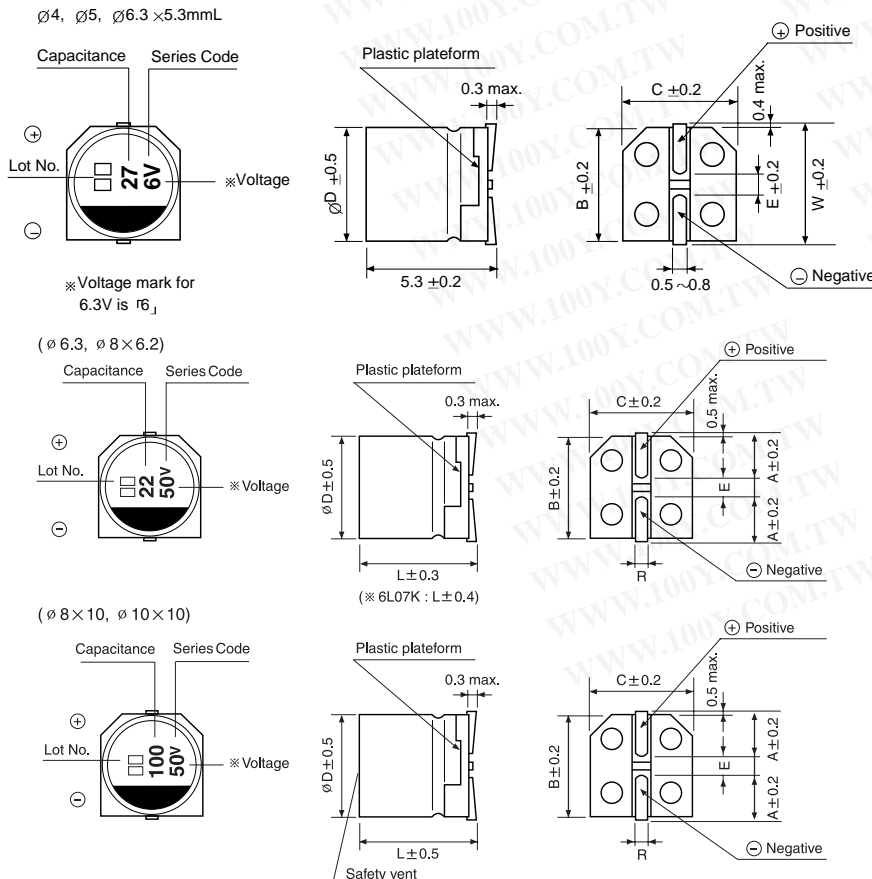

∅D × L	W	A	B	C	E	R
4 × 5.3	4.8		4.3	4.3	1.0	0.5~0.8
5 × 5.3	6.0		5.3	5.3	1.4	0.5~0.8
6.3 × 5.3	7.1		6.6	6.6	2.2	0.5~0.8
6.3 × 5.8		2.4	6.6	6.6	2.2	0.5~0.8
6.3 × 7.7		2.4	6.6	6.6	2.2	0.5~0.8
8 × 6.2		3.3	8.3	8.3	2.3	0.5~0.8
8 × 10		2.9	8.3	8.3	3.1	0.8~1.1
10 × 10		3.2	10.3	10.3	4.5	0.8~1.1

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

SURFACE MOUNT ALUMINUM ELECTROLYTIC CAPACITORS

SC series

● DIMENSIONS & MAXIMUM PERMISSIBLE RIPPLE CURRENT

WV μF	4	6.3	10	16	25	35	50	63	100
0.1							3×5.3 2.4		
							4×5.3 3.2		
0.22							3×5.3 3.5		
							4×5.3 4.7		
0.33							3×5.3 4.3		
							4×5.3 5.7		
0.47							3×5.3 5.2		
							4×5.3 6.8		
1.0							3×5.3 7.5		
							4×5.3 10		
2.2						3×5.3 10			
						4×5.3 11	4×5.3 14.8		
3.3					3×5.3 12				6.3×5.8 29
					4×5.3 15	4×5.3 16	4×5.3 18.1		
4.7				3×5.3 13		4×5.3 19	4×5.3 24		6.3×5.8 35
				4×5.3 16	4×5.3 18		5×5.3 25	6.3×5.8 31	8×6.2 40
10	3×5.3 13	3×5.3 16			4×5.3 24	4×5.3 27	5×5.3 41		
	4×5.3 16	4×5.3 19	4×5.3 21	4×5.3 21	5×5.3 30	5×5.3 32	6.3×5.3 42.6	8×6.2 46	8×10 77
22	3×5.3 19		4×5.3 28	4×5.3 30	5×5.3 41	6.3×5.3 55	6.3×5.3 71		
	4×5.3 24	4×5.3 29	5×5.3 36	5×5.3 41	6.3×5.3 53		6.3×5.8 73	8×10 96	8×10 100
33	4×5.3 29	4×5.3 30	4×5.3 34	5×5.3 43	5×5.3 50	6.3×5.3 65	6.3×5.8 94		
		5 5.3 41	5×5.3 44	6.3×5.3 58	6.3×5.3 64	6.3×5.8 67	8×6.2 95	8×10 117	10×10 130
47	4×5.3 35	4×5.3 36	5×5.3 47	5×5.3 52	6.3×5.3 70	6.3×7.7 94	6.3×7.7 105		
		5×5.3 48	6.3×5.3 62	6.3×5.3 69	6.3×5.8 72	8×6.2 105	8×10 140	8×10 140	10×10 155
100	5×5.3 54	5×5.3 60	6.3×5.3 80	6.3×5.3 88		6.3×7.7 132	8×10 181		
	6.3×5.3 68	6.3×5.3 82	6.3×5.8 82	6.3×5.8 91	8×6.2 145	8×10 175	10×10 195	10×10 232	
220	6.3×5.3 93	6.3×5.8 91	6.3×7.7 173	6.3×7.7 162	8×10 232	10×10 265			
			8×6.2 175	8×10 215	10×10 250				
330		6.3×7.7 188			10×10 305				
		8×6.2 190	8×10 240	8×10 270					
470		8×10 265	8×10 290	8×10 307					
				10×10 330					
1000		8×10 372	10×10 454						
		10×10 400							

↑ ↑
 Ripple current (mA rms) at 85°C, 120Hz
 Case size $\varnothing D \times L$ (mm)