


Dimensions in mm (inches).

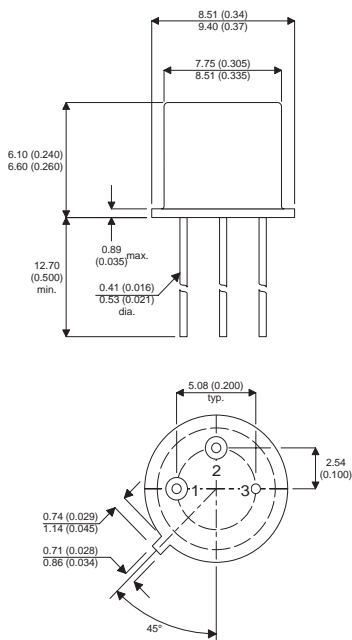

TO39 (TO205AD) PINOUTS

1 – Emitter 2 – Base 3 – Collector

Bipolar PNP Device in a Hermetically sealed TO39 Metal Package.

Bipolar PNP Device.

$$V_{CEO} = 180V$$

$$I_C = 0.1A$$

All Semelab hermetically sealed products can be processed in accordance with the requirements of BS, CECC and JAN, JANTX, JANTXV and JANS specifications

Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_{CEO}^*				180	V
$I_{C(CONT)}$				0.1	A
h_{FE}	@ 10/1m (V_{CE} / I_C)	100			-
f_t			40M		Hz
P_D				0.7	W

* Maximum Working Voltage