


ADJUSTABLE TEMPERATURE CONTROLLED SOLDERING STATION

A ceramic heater is installed inside the SL-30CMC ceramic temperature-control solder iron, which is modified from SL-30CMC, and the temperature adjustment is more accurate.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

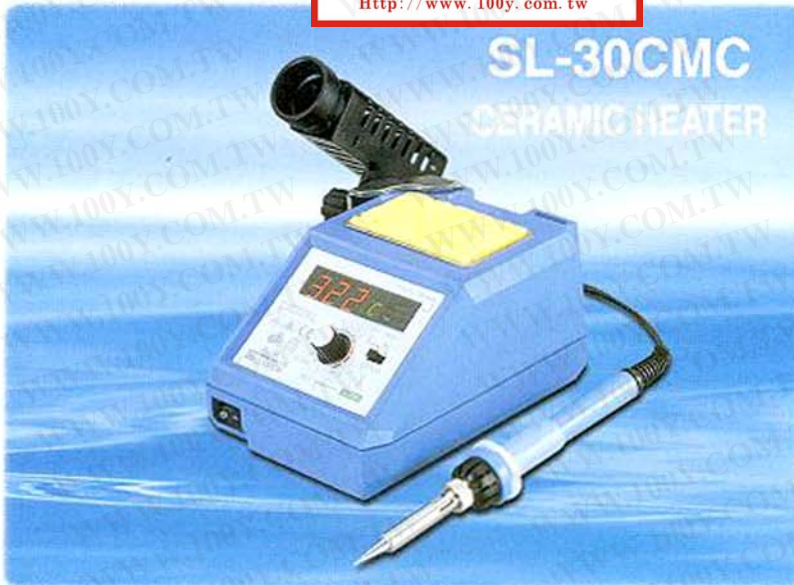


CERAMIC HEATING ELEMENT



SL-30CMCH

REPLACEMENT TIPS

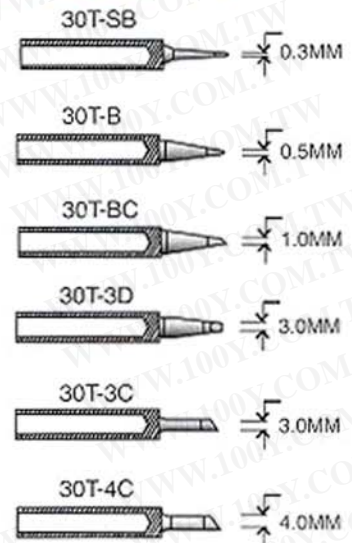

The temperature on the panel of the SL-30CMC temperature - control soldering iron station is displayed digitally with the adjustment range from 160°C to 480°C. The digitally displayed temperature on the panel can be adjusted to SET thus setting all the required temperatures for operation and such a setting is very accurate.

Voltage	110/120V AC or 220/240V AC
Power consumption	48W
Temp.setting range	160 °C~480°C 320°F~900 °F
Heater Operating Voltage	24V AC
Size	Handpiece: 203mm Station: L170:W116:H96(mm)
Weight	1940g
Station-Handpiece cordlength	115cm
AC Power cord	2pin or 3pin plug 180cm
Packing Measure	8 pcs CUFT 1.77'