勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

Material:

Housing : High temperature housing UL94V-0 withstands IR and CPR soldering methods.
Contacts: Phosphor Bronze.
Plating: Tin plated.

Electrical Characteristics:

Current Rating: 1 AMP.
Insulator Resistance: 5000M Ω min. at DC 500V.
Contact Resistance: 20m Ω max. at DC 100mA.
Operating temperature: -55℃ ~ +105℃.
Capacitance: 1.0pF max between adjacent contacts.

Mechanical Characteristics:

Insertion Force: 180g/contact max.
Withdrawal Force:28.35g/contact max.
Life cycle: 25 mating cycle min.

Features:

- Surface mount.
- Hi-Temp plastic (PPS).
- Low profile 4.46mm(0.176") height
- Accept chip carries conforming to JEDEC spec.
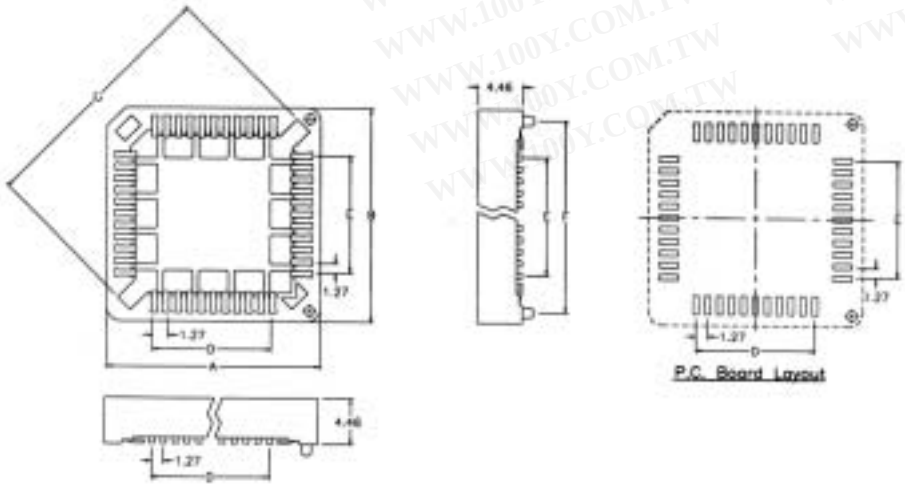
Product No.	Dimension					
	A	B	C	D	E	F
C20-20P-S	15.50	15.50	15.95	5.08	5.08	12.72
C20-28P-S	18.00	18.00	19.59	7.62	7.62	15.27
C20-32P-S	18.00	20.58	22.34	7.62	10.16	17.80
C20-44P-S	23.58	23.58	27.60	12.70	12.70	20.32
C20-52P-S	25.90	25.90	30.86	15.24	15.2	22.90
C20-68P-S	31.80	31.80	38.40	20.32	20.32	27.94
C20-84P-S	36.00	36.00	44.80	25.40	25.40	33.06