

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

## FEATURES:

- Plastic package Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon junction Majority carrier conduction
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High temperature soldering guaranteed: 250°C/10 seconds, 0.25"(6.35mm) from case

## MECHANICAL DATA

Case : JEDEC TO-220AC molded plastic

Terminals : Leads solderable per MIL-STD-750


Method 2026

Polarity : As marked

Mounting Position : Any

Mounting Torque 5 In - lbs.max

Weight : 0.08 ounce, 2.24 grams

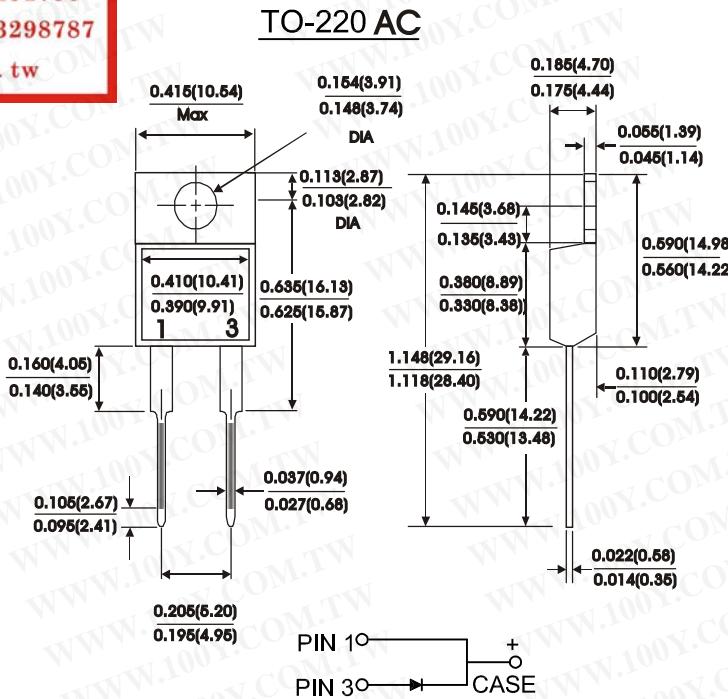

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase half wave, 60 Hz resistive or inductive load.

For capacitive load, derate current by 20%.



Characteristic	Symbol	SR1020	SR1030	SR1035	SR1040	SR1045	SR1050	SR1060	Units		
Maximum recurrent peak reverse voltage	V <sub>RRM</sub>	20	30	35	40	45	50	60	Volts		
Maximum RMS voltage	V <sub>RMS</sub>	14	21	25	28	32	35	42	Volts		
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	35	40	45	50	60	Volts		
Maximum average forward rectified current at (See Fig. 1)	I <sub>(AV)</sub>	10						Amps			
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	150						Amps			
Maximum instantaneous forward voltage IF=10A (NOTE 2) IF=20A	V <sub>F</sub>	0.63 0.84				0.80 0.95		Volts			
Maximum instantaneous reverse current at rated DC blocking voltage (NOTE 2) T <sub>C</sub> =25°C T <sub>C</sub> =125°C	I <sub>R</sub>	0.5 15.0						mA			
Typical thermal resistance (NOTE 1)	R <sub>th</sub> -JC	2.0						°C/W			
Operating temperature range	T <sub>J</sub>	-65 to +150						°C			
Storage temperature range	T <sub>Stg</sub>	-65 to +175						°C			

### NOTES:

(1) Thermal resistance from junction to case

(2) Pulse test: 300 us pulse width, 1% duty cycle

# RATINGS AND CHARACTERISTIC CURVES SR1020 THRU SR1060

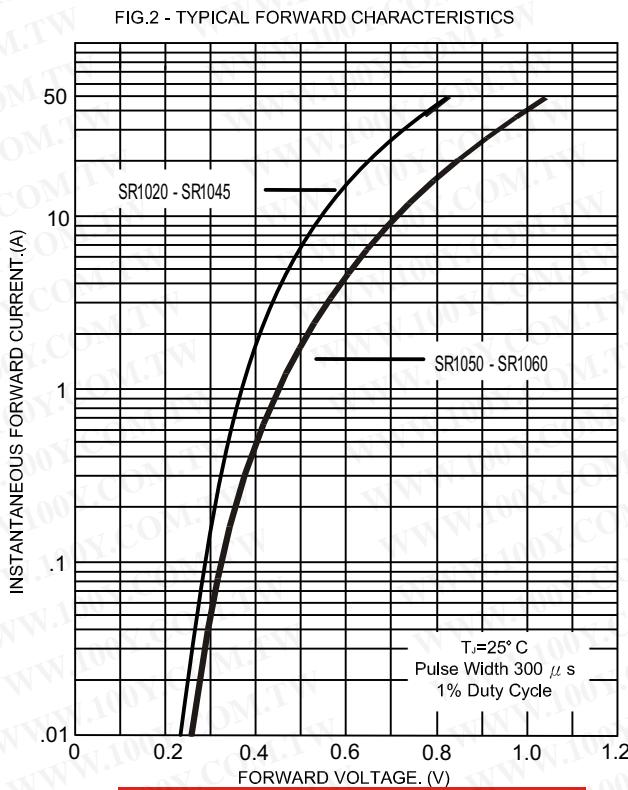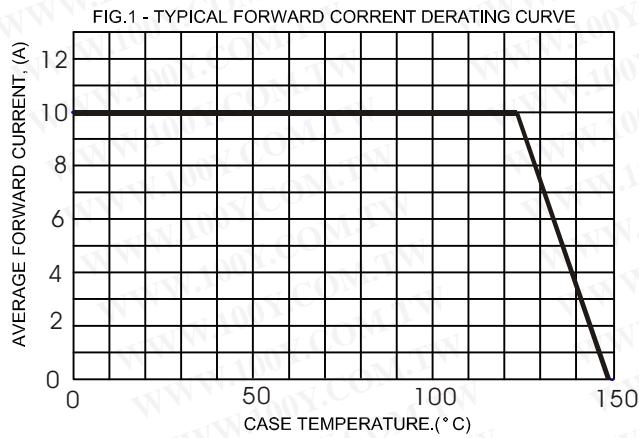

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-54151736  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

