

SR720 THUR SR760

SCHOTTKY BARRIER RECTIFIERS

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787

Http://www.100y.com.tw

FEATURES:

- Plastic package Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon Junction Majority carrier conduction
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High temperature soldering guaranteed: 250°C/10 seconds, 0.25"(6.35mm) from case

MECHANICAL DATA

Case : JEDEC TO-220AC molded plastic

Terminals : Leads solderable per MIL-STD-750


Method 2026

Polarity : As marked

Mounting Position : Any

Mounting Torque 5 In - lbs.max

Weight : 0.08 ounce, 2.24 grams

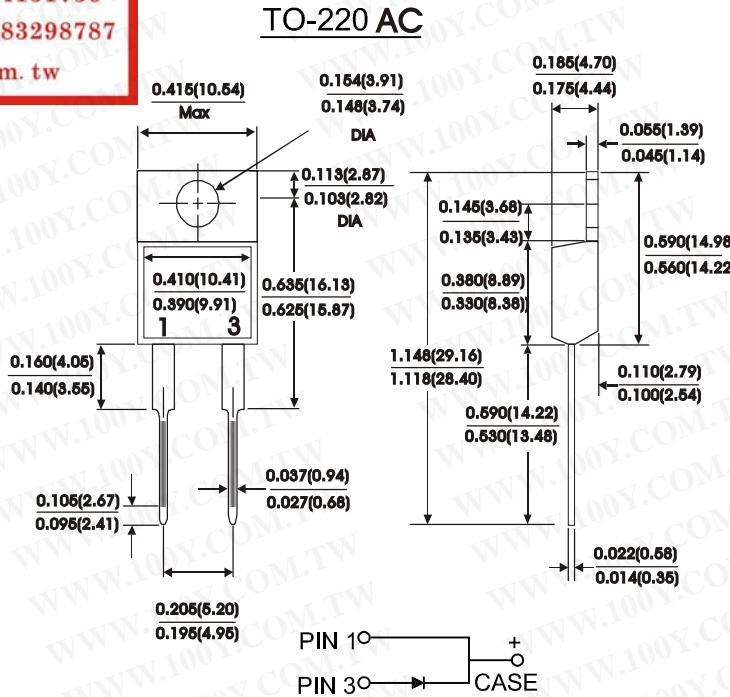

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase half wave, 60 Hz resistive or inductive load.

For capacitive load, derate current by 20%.

Characteristic	Symbol	SR720	SR730	SR735	SR740	SR745	SR750	SR760	Units		
Maximum recurrent peak reverse voltage	V _{RRM}	20	30	35	40	45	50	60	Volts		
Maximum RMS voltage	V _{RMS}	14	21	25	28	32	35	42	Volts		
Maximum DC blocking voltage	V _{DC}	20	30	35	40	45	50	60	Volts		
Maximum average forward rectified current at (See Fig. 1)	I _O	7.5						Amps			
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}	150						Amps			
Maximum instantaneous forward voltage IF=7.5 A (NOTE 2) IF=15 A	V _F	0.63 0.84				0.73 0.95		Volts			
Maximum instantaneous reverse current at rated DC blocking voltage (NOTE 2) T _C =25°C T _C =125°C	I _R	0.3 15.0				0.5 50		mA			
Typical thermal resistance (NOTE 1)	R _{th} -JC	3.0						°C/W			
Operating temperature range	T _J	-65 to +150						°C			
Storage temperature range	T _{Stg}	-65 to +175						°C			

NOTES:

(1) Thermal resistance from junction to case

(2) Pulse test: 300 us pulse width, 1% duty cycle

RATINGS AND CHARACTERISTIC CURVES SR720 THRU SR760

