

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

## FEATURES:

- Plastic package Underwriters Laboratory Flammability Classification 94V-0
- Dual rectifier construction, positive centertap
- Metal silicon junction Majority carrier conduction
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High temperature soldering guaranteed: 250°C/10 seconds, 0.25"(6.35mm) from case

## MECHANICAL DATA

Case : JEDEC ITO-220AB molded plastic

Terminals : Leads solderable per MIL-STD-750


Method 2026

Polarity : As marked

Mounting Position : Any

Mounting Torque 5 In - lbs.max

Weight : 0.08 ounce, 2.24 grams

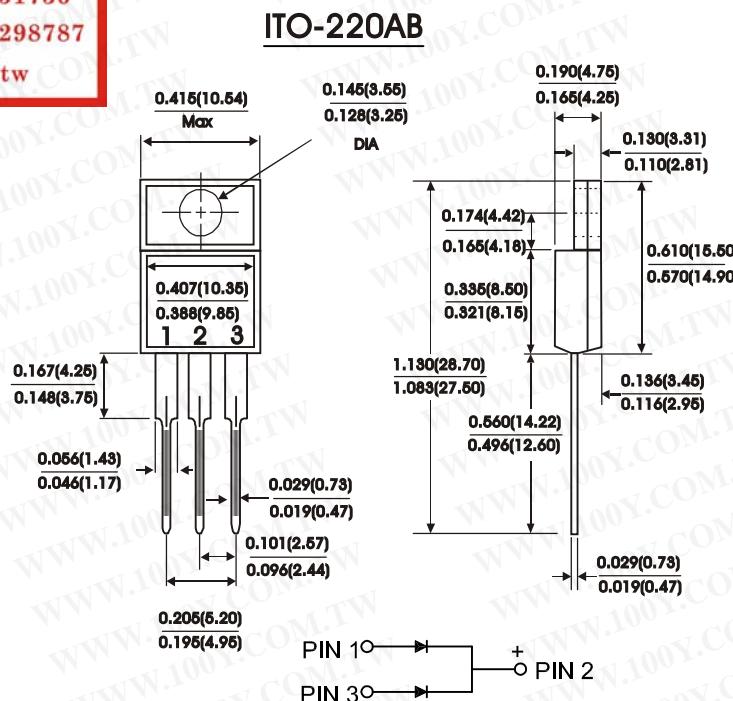

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase half wave, 60 Hz resistive or inductive load.

For capacitive load, derate current by 20%.

Characteristic	Symbol	SRF 1520CT	SRF 1530CT	SRF 1535CT	SRF 1540CT	SRF 1545CT	SRF 1550CT	SRF 1560CT	Units
Maximum recurrent peak reverse voltage	V <sub>RRM</sub>	20	30	35	40	45	50	60	Volts
Maximum RMS voltage	V <sub>RMS</sub>	14	21	25	28	32	35	42	Volts
Maximum DC blocking voltage	V <sub>DC</sub>	20	30	35	40	45	50	60	Volts
Maximum average forward rectified current at T <sub>c</sub> =125 °C	I <sub>(AV)</sub>					15			Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)(Per leg)	I <sub>FSM</sub>				150				Amps
Maximum instantaneous forward voltage (Per leg)(NOTE 2)	I <sub>F</sub> = 7.5A	V <sub>F</sub>		0.63		0.75			Volts
Maximum instantaneous reverse current at rated DC blocking voltage (Per leg)(NOTE 2)	T <sub>c</sub> =25 °C T <sub>c</sub> =125 °C	I <sub>R</sub>		0.5 50					mA
Typical thermal resistance (Per leg)(NOTE 1)	R <sub>th</sub> -JC			5.0					°C/W
Operating temperature range	T <sub>J</sub>			-65 to +150					°C
Storage temperature range	T <sub>Stg</sub>			-65 to +175					°C



### NOTES:

(1) Thermal resistance from junction to case

(2) Pulse test: 300 us pulse width, 1% duty cycle

(3) Marking : SRF1520CT = SRF1520 (Without Marking "CT")  
 Symbol      Marking

# RATINGS AND CHARACTERISTIC CURVES SRF1520CT THRU SRF1560CT

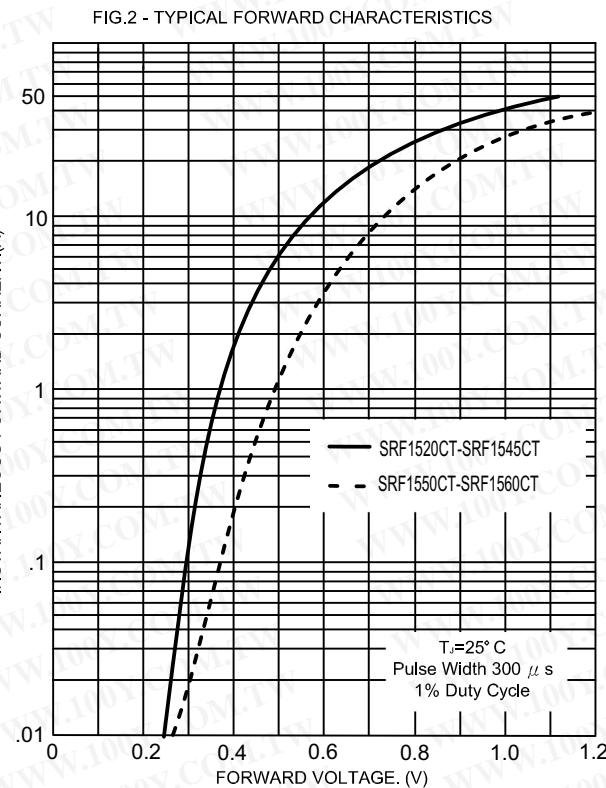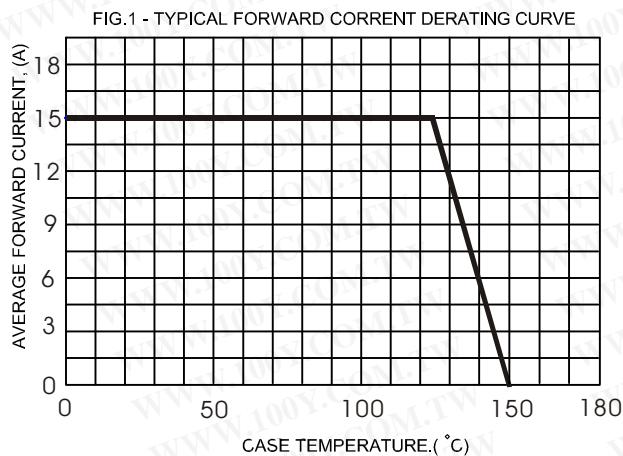

勝特力材料 886-3-5753170  
胜特力电子(上海) 86-21-54151736  
胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

