

SRF1620 THUR SRF1660

SCHOTTKY BARRIER RECTIFIERS

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

FEATURES:

- Plastic package Underwriters Laboratory Flammability Classification 94V-0
- Metal silicon Junction Majority carrier conduction
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High temperature soldering guaranteed: 250°C/10 seconds, 0.25"(6.35mm) from case

MECHANICAL DATA

Case : JEDEC ITO-220AC molded plastic

Terminals : Leads solderable per MIL-STD-750

Method 2026


Polarity : As marked

Mounting Position : Any

Mounting Torque 5 In - lbs.max

Weight : 0.08 ounce, 2.24 grams

ITO-220AC

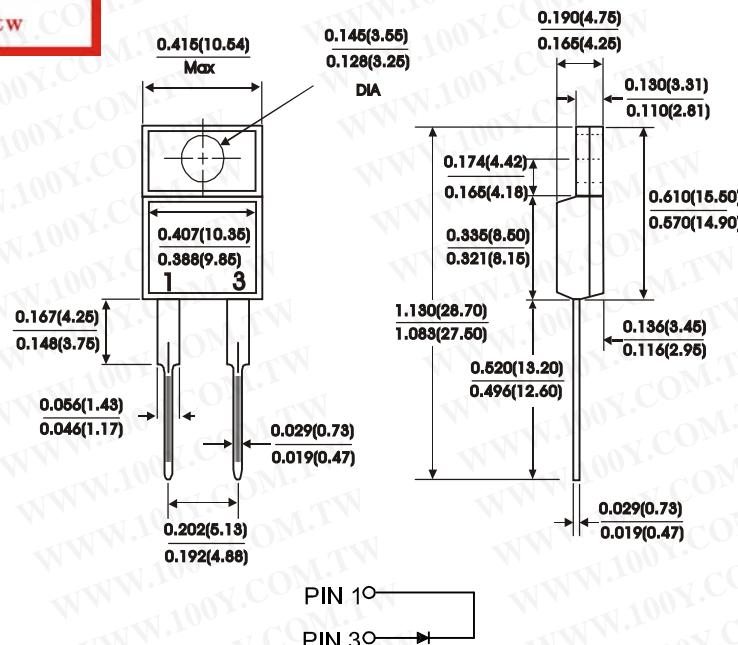

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase half wave, 60 Hz resistive or inductive load.

For capacitive load, derate current by 20%.

Characteristic	Symbol	SRF 1620	SRF 1630	SRF 1635	SRF 1640	SRF 1645	SRF 1650	SRF 1660	Units
Maximum recurrent peak reverse voltage	V _{RRM}	20	30	35	40	45	50	60	Volts
Maximum RMS voltage	V _{RMS}	14	21	25	28	32	35	42	Volts
Maximum DC blocking voltage	V _{DC}	20	30	35	40	45	50	60	Volts
Maximum average forward rectified current at T _c =125 °C	I _(AV)					16			Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I _{FSM}					150			Amps
Maximum instantaneous forward voltage IF=16A (NOTE 2)	V _F			0.63			0.75		Volts
Maximum instantaneous reverse current at rated DC blocking voltage (NOTE 2)	I _R	T _c =25 °C T _c =125 °C		0.5 40			1.0 50		mA
Typical thermal resistance (NOTE 1)	R _{th} -JC			3.0					°C/W
Operating temperature range	T _J			-65 to +150					°C
Storage temperature range	T _{Stg}			-65 to +175					°C

NOTES:

(1) Thermal resistance from junction to case

(2) Pulse test: 300 us pulse width, 1% duty cycle

RATINGS AND CHARACTERISTIC CURVES SRF1620 THRU SRF1660

