

# SRF3020CT THUR SRF3060CT

SCHOTTKY BARRIER RECTIFIERS

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## FEATURES:

- Plastic package Underwriters Laboratory Flammability Classification 94V-0
- Dual rectifier construction, positive centertap
- Metal silicon junction Majority carrier conduction
- Low power loss, high efficiency
- High current capability, low forward voltage drop
- High temperature soldering guaranteed: 250°C/10 seconds, 0.25"(6.35mm) from case

## MECHANICAL DATA

Case : JEDEC ITO-220AB molded plastic

Terminals : Leads solderable per MIL-STD-750


Method 2026

Polarity : As marked

Mounting Position : Any

Mounting Torque 5 In - lbs.max

Weight : 0.08 ounce, 2.24 grams

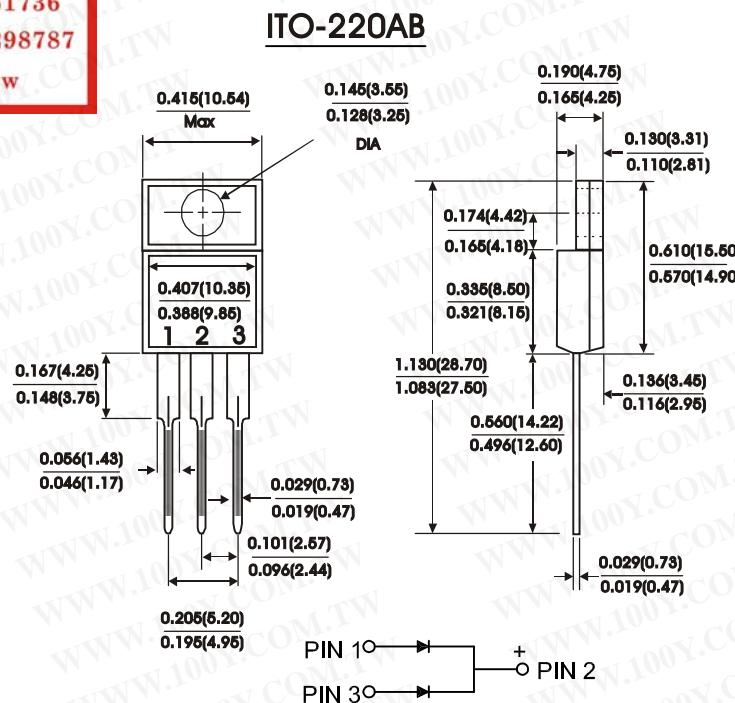

Dimensions in inches and (millimeters)

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase half wave, 60 Hz resistive or inductive load.

For capacitive load, derate current by 20%.

| Characteristic  | Symbol              | SRF 3020CT                                      | SRF 3030CT | SRF 3035CT  | SRF 3040CT | SRF 3045CT | SRF 3050CT | SRF 3060CT | Units |
|---|---------------------|---|------------|-------------|------------|------------|------------|------------|-------|
| Maximum recurrent peak reverse voltage  | V <sub>RRM</sub>    | 20  | 30         | 35          | 40         | 45         | 50         | 60         | Volts |
| Maximum RMS voltage   | V <sub>RMS</sub>    | 14  | 21         | 25          | 28         | 32         | 35         | 42         | Volts |
| Maximum DC blocking voltage   | V <sub>DC</sub>     | 20  | 30         | 35          | 40         | 45         | 50         | 60         | Volts |
| Maximum average forward rectified current at See fig. 1   | I <sub>(AV)</sub>   |   |            |             |            | 30         |            |            | Amps  |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)(Per leg) | I <sub>FSM</sub>    |   |            |             | 200        |            |            |            | Amps  |
| Maximum instantaneous forward voltage (Per leg)(NOTE 2)   | V <sub>F</sub>      |   |            | 0.65        |            | 0.80       |            |            | Volts |
| Maximum instantaneous reverse current at rated DC blocking voltage(Per leg)(NOTE 2)                       | I <sub>R</sub>      | T <sub>C</sub> =25 °C<br>T <sub>C</sub> =125 °C |            |             | 1.0<br>60  |            |            |            | mA    |
| Typical thermal resistance (Per leg)(NOTE 1)  | R <sub>th</sub> -JC |   |            | 4.5         |            |            |            |            | °C/W  |
| Operating temperature range   | T <sub>J</sub>      |   |            | -65 to +150 |            |            |            |            | °C    |
| Storage temperature range   | T <sub>Stg</sub>    |   |            | -65 to +175 |            |            |            |            | °C    |



### NOTES:

(1) Thermal resistance from junction to case

(2) Pulse test: 300 us pulse width, 1% duty cycle

(3) Marking : SRF3020CT = SRF3020 (Whitout Marking "CT")  
 Symbol      Marking

# RATINGS AND CHARACTERISTIC CURVES SRF3020CT THRU SRF3060CT

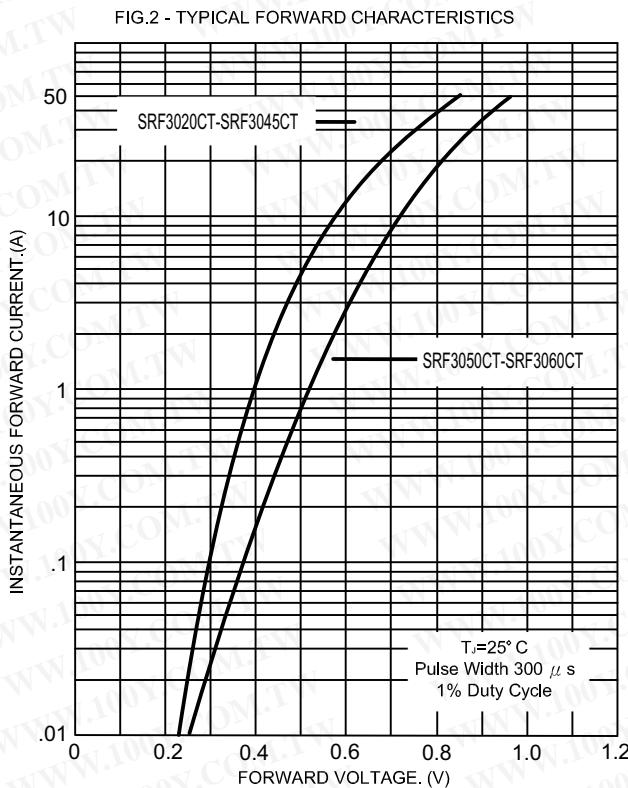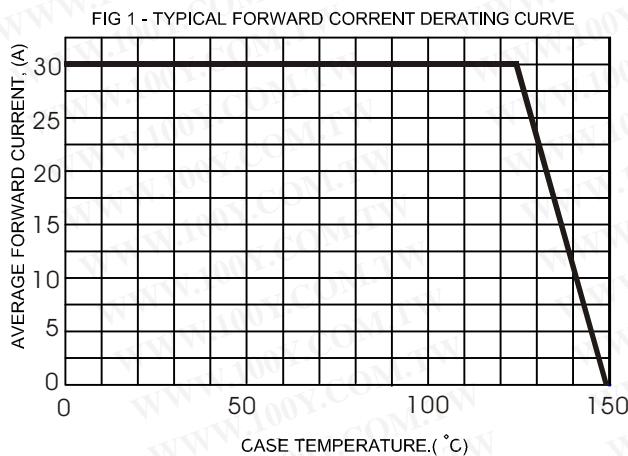

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

