

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

SRD-N/TRD-N

STAR-DELTA TIMER

馬達啟動器



- CE Approved .
- P&B or Omron relays inside.
- MOTOROLA IC inside.
- Standard change time is 0.1Seconds .
- 德國 CE 認證。
- 內部採用美國 P&B 或日本 Omron 繼電器。
- 使用美國 MOTOROLA IC 。
- 標準啟動交換時間為 0.1S。
- 若配電空間狹小可訂購 SRD-N。
- 啟動交換時間為 0.1S 以上也可訂製。

ORDERING INFORMATION 訂購說明

Ex **S** RDN **A220**



Controller Type 型式	Time range 時間範圍	Operating voltage 電壓範圍
T: TRD-N S: SRD-N	30S	D24 : DC24V A110 : AC110V A220 : AC220V A240 : AC240V A380 : AC380V A415 : AC415V A440 : AC440V

SPECIFICATIONS & CHARACTERISTICS 規格 & 特性

Type 型式	SRD-N/TRD-N	
Rate operation voltage 額定電壓	DC: 24V	AC: 110V 220V 240V 380V 415V 440V
Operating voltage range 電壓使用範圍	DC: 85%~110% AC: 80%~110%	
Rated frequency 額定頻率	AC: 50~60Hz	
Rated power consumption 額定功率消耗	About: 2VA	
Rated control capacity 輸出容量	DC: 5A 28VDC	AC: 5A 250VAC P.F.=1
Setting accuracy 設定誤差	± 10%	
Change time 交換時間	0.1S	
Life 壽命	Mechanical 機械	5000000
	Electrical 電氣	100000
Output arrangement 輸出方式	TIME out 1 form C	
Max. temperature rise 最大溫升	55 deg.	
Ambient temperature 周圍溫度	-10 to +65 但不結冰結露 But no ice	
Ambient humidity 周圍溼度	Max. 85% RH	
Weight 重量	About 180g / About 245g	


DIMENSIONS 規格尺寸

SRD-N





SRD-N + PF085A + FH-3x2


UNIT :mm



TRD-N





TRD-N + 8PFA



OPERATION 操作方式

SRD-N/TRD-N

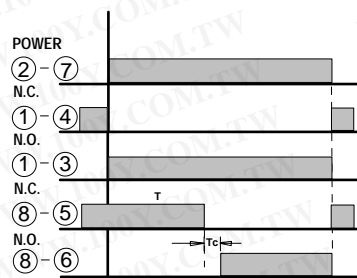

Tc: Change time

COM.: Common terminal
 N.C.: Normally closed contact
 N.O.: Normally open contact
 ● ▲ ● : Timed out contact
 ○ ○ : Instantaneous contact

- NOTE:
- Set time should be greater than min. operation time.
 - Once power is cut off or timing operation is completed, Power off time is needed to start the operation again.
 - Do not change the set time during operation.
 - When changing set time, cut off power and set the time.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)