




STP series

MULTI-FUNCTION DIGITAL TIMER

Type	2 Digits	3 Digits	4 Digits
Model	STP-2D	STP-3D	STP-4D
Figure			
Range	0~99	0~999	0~9999
Display	0.56" 7-Segment LED	0.56" 7-Segment LED	0.56" 7-Segment LED
Weight	S,0.1S,0.01S,M,0.1M,H or 0.1H Selectable		

Specification

Power Supply	90 or 250 VAC 50/60Hz
Wattage	5VA max.
Memory Method	EEPROM
Timing Method	UP or Down Selecting
Time Input	Hi>6V,Lo<2V
Reset Input	Hi>6V,Lo<2V
Output Method	Relay, 1c / 10A
Output Control	N/R Selectable
Control Method	10 mode
DC Output	60 mA /12VDC
Delay Timer<t>	0.1~9.9S
Insulation Strength	100M Ω/ 500 VDC
Dielectric Strength	2.5KV/ 1min
Circumstance	-20°~60°C,35~85%RH
Life	20X10 ⁶ Times

Illumination

Unit : S → 0.1S → 0.01S → M → 0.1M → H → 0.1H

<Push  &  Key To Select The Unit>.

Slide Switch

"N" : Manual Reset

"R" : Auto Reset

"LK" : To Lock Unit Selection

"UL" : To Unlock Unit Selection

Inside DIP Switch

NO.1 : ON=Memory

: OFF=Non-Memory


NO.2 : ON=Down Timing

: OFF=UP Timing

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Dimension

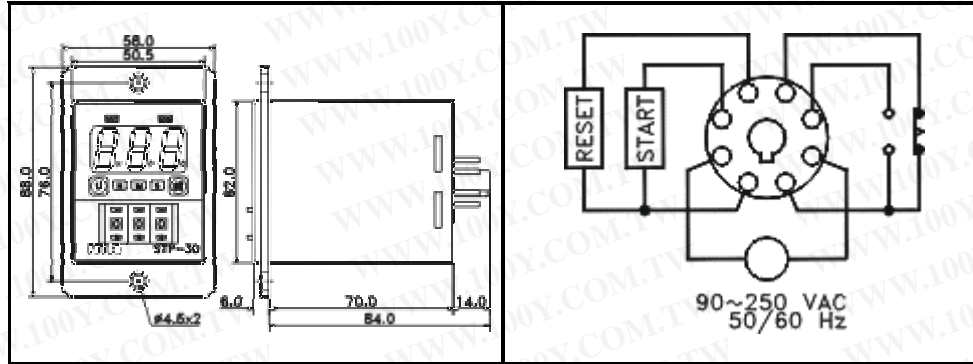

Ps. N Type Available Also.