


T-25 LOADED BOARD PROBES

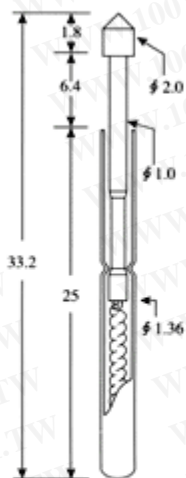

■ Recommended min. center (最小間距) : 2.54 (0.1")

■ Mounting hole size (鑽孔尺寸) : 1.7 (.0669") / 1.75 (.0689")

■ Full travel (行程) : 6.4 (.252")

■ Materials and finishes (材料及塗飾) :

Plunger : Be Cu, Rh plated

Barrel : Phosphor bronze, Gold plated


Spring : Stainless

■ Current rating (額定電流) : 3A


■ Contact resistance (接觸電阻) : 50 mΩ

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


T25-1.0B




T25-1.0F




T25-1.0F2




T25-1.0D




T25-1.0T




T25-1.5A




T25-1.5D




T25-1.5E




T25-1.5F




T25-1.5G




T25-1.5H




T25-1.5K




T25-1.5Q




T25-1.5T




T25-1.8H




T25-2.0H




T25-2.5H



T25-3.0T



T25-3.0H



T25-M3

