

# MODEL TL-4930

International size reference: D, ER32L615


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## TADIRAN LITHIUM BATTERIES

### TECHNICAL DATA




(Typical values @+25°C for batteries stored for one year or less)

■ Nominal capacity @ 4 mA, to 2 V	19 Ah
■ Rated voltage	3.6 V
■ Maximum recommended continuous current	100 mA
■ Maximum 1 sec. pulse capability	250 mA
■ Weight	93 g (3.28 oz)
■ Volume	51 cc
■ Operating temperature range	-55 °C to +85 °C
■ U.L. Component Recognition, MH 12193	

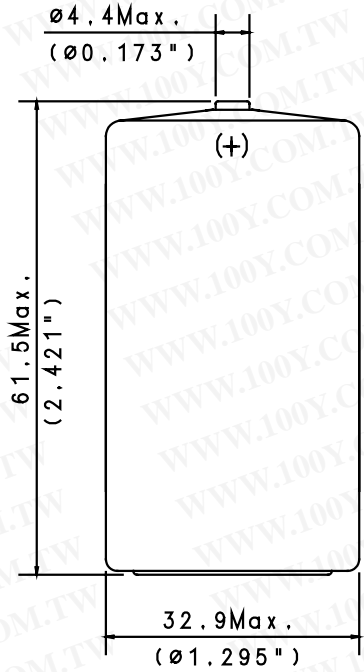

#### AVAILABLE TERMINATIONS

SUFFIX- /S STANDARD	15-4930-21000
SUFFIX- /T SOLDER TABS	15-4930-31000

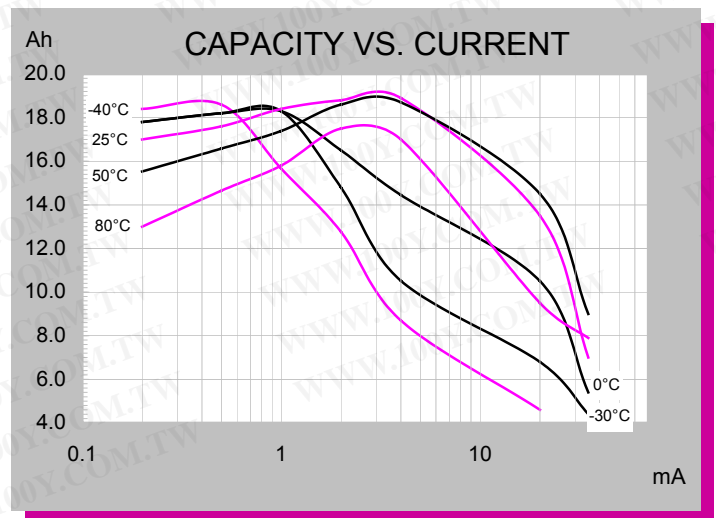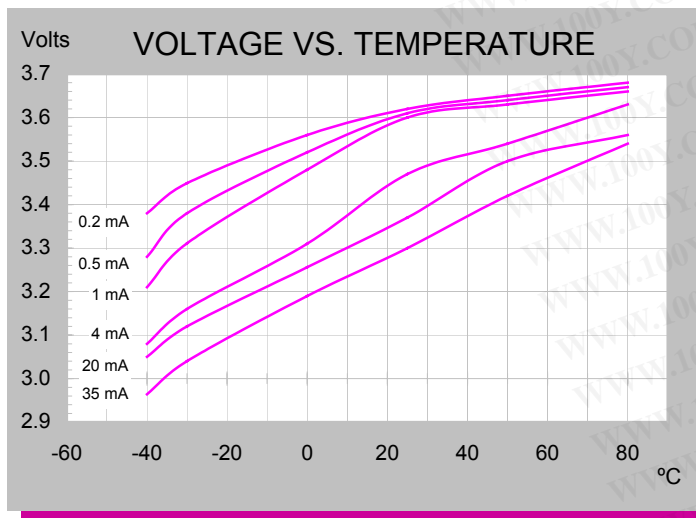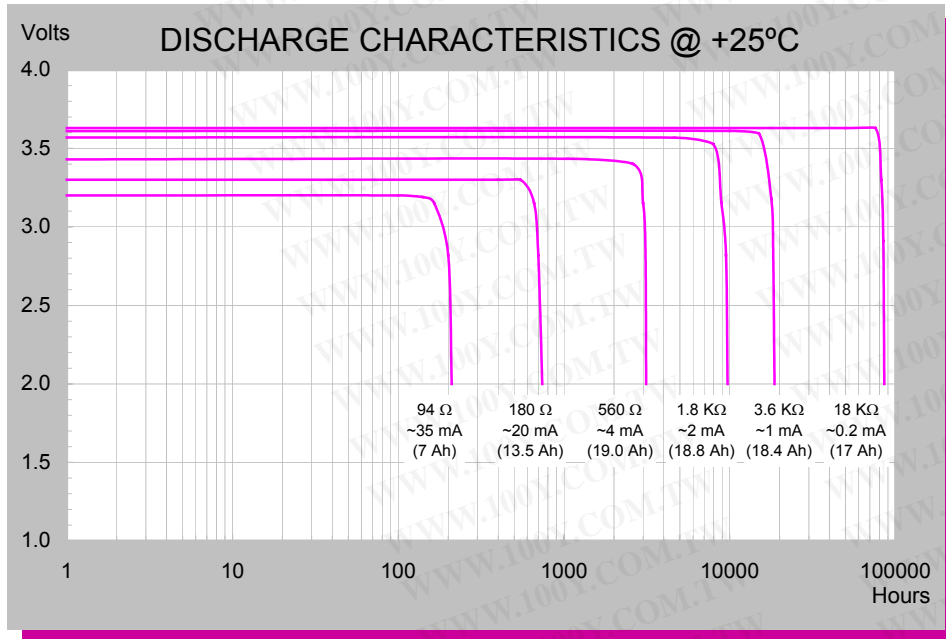

## XOL - Extended Operating Life

Note: Any presentations in this data sheet concerning performance are for information purpose only and are not construed as warranties either expressed or implied, of future performance.

ECN 1501174 Rev. C 01/06