


## SHAPE AND SIZE : TC-150M-2A-4426

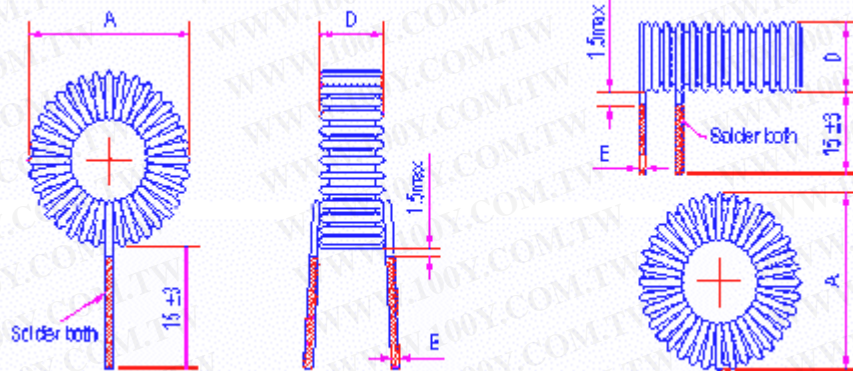

### Features :

- Useful in a wide variety of power conversion and line filter applications .
- Wound on Iron Powder material toroids .
- COST-EFFECTIVE design .
- Low volume hand wound to high volume automatic machine wound .
- 130 $\mu$ J UEW-NY wire .
- High saturation current .
- Coated with varnish .

### Ordering information :

- (1)Type : Toroidal coils .
- (2)Inductance : Example : 101 for 100  $\mu$ H
- (3)Inductance tolerance : J :  $\pm 5\%$  ; K :  $\pm 10\%$  ; M :  $\pm 20\%$  .
- (4)Rated current in Amps .
- (5)Core style : OD =0.5" .
- (6)Core material : "-26" or "-52" .

### Characteristics :

- (1) Inductance range : 1.0 $\mu$ H to 10000 $\mu$ H .
- (2)Current rating: Based on current density about 8.0 A / mm<sup>2</sup> .
- (3) Rated frequency : "-26" : 50Hz ~ 100 KHz ; "-52" : 10KHz~ 500KHz .
- (4)Operating temperature : -55 $^{\circ}$ C to 125 $^{\circ}$ C .

- Test equipent :  
L tested by LCR meter @ 1KHz .  
DCR tested by Milliohm meter .

### Applications :

- Power supplies .
- Switching Circuits .
- SCR and Triac Controls .
- Output chokes .
- EMI / RFI chokes .
- Other filters .

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)