


Model designations

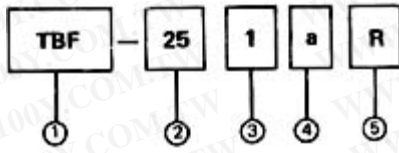

·Note: TBD, TBMR, TBDR are 30m/m only

·Specifications

Dielectric strength:

AC2200V for duration of one minute.

Insulation resistance: over 100MΩ@DC500V

Temperature rise:

At contacts Less than 30 degrees.

At terminals Less than 25 degrees.

(@Ambient temperature of 40°C, and a continuous current of 10 amperes)

Contact resistance: Less than 30mΩ

Ambient temperature allowable: -20°C -60°C

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



TYPE	H	L	W
1A1B	25	35	32.5
1A or 1B	25	26	32.5

Designation	Signal	Description
1.Type	TBF	Flat head
	TBL	Long head
	TBM	Mushroom head
	TBW	Rainproof
	TBK	Push-lock
	TBKL	Push-lock(large head)
	TBD	Special duty
	TBMR	Mushroom head with guard ring
	TBDR	Special duty with guard ring
2.Mounting hole	25	Φ 25m/m
	30	Φ 30m/m
3.No.of contact blocks fitted	1~4	1~4
4.Type of contact blocks fitted	(None)	1a1b(NO-NC)
	a	1a(NO)
	b	1b(NC)
5.Head color	R	Red
	G	Green
	Y	Yellow
	B	Black

W

White

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)