


Hook-Up Wire

UL1015

Construction

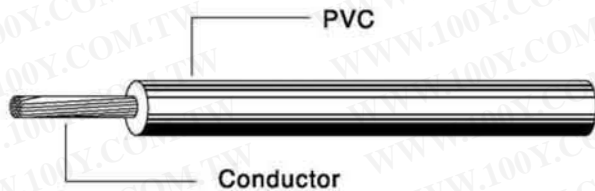

Product Description:

1. Solid or stranded, tinned or bare copper conductor 28-9AWG
2. Color-coded PVC insulation
3. Rated temperature: 105°C. Rated voltage: 600V
4. Uniform thickness of wire to ensure easy stripping and cutting.
5. Resistant to acids, oils, alkalis, moisture and fungus.
6. Passes UL VW-1 & CSA FT1 vertical flame test.

Application:

1. For internal wiring of appliances

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

UL Style & CSA Type	Conductor		Insulation Thickness mm	Overall Diameter mm
	AWG	No./mm		
UL1015 CSA IA(TEW) (Stranded)	26	7/0.160	0.79	2.05 ± 0.10
	24	11/0.160		2.20 ± 0.10
	22	17/0.160		2.40 ± 0.10
	20	21/0.180		2.55 ± 0.10
	18	34/0.180		2.80 ± 0.10
	16	26/0.254		3.10 ± 0.10
	14	41/0.254		3.50 ± 0.10
	12	65/0.254		3.90 ± 0.10
	10	105/0.254		5.10 ± 0.15
UL1015 CSA IA(TEW) (Top-coated)	22	7/0.254		2.38 ± 0.10
	20	7/0.320		2.55 ± 0.10
	18	7/0.404		2.80 ± 0.10
UL1015 CSA IA(TEW) (Solid)	26	1/0.404		2.00 ± 0.10
	24	1/0.511		2.10 ± 0.10
	22	1/0.643		2.25 ± 0.10
	20	1/0.813	2.40 ± 0.10	
	18	1/1.024	2.65 ± 0.10	
	16	1/1.290	2.90 ± 0.10	
	14	1/1.630	3.25 ± 0.10	
	12	1/2.050	3.65 ± 0.10	
	10	1/2.588	4.20 ± 0.10	