

# BIPOLAR ANALOG INTEGRATED CIRCUIT

## $\mu$ PC29S00 Series

### LOW DROPOUT VOLTAGE REGULATOR WITH ON/OFF FUNCTION

The  $\mu$ PC29S00 series is a low dropout regulator which has 100 mA capable for the output current. This series features ON/OFF function to control output voltage.

The  $\mu$ PC29S00 series is suitable for NEC's single chip microcontroller which have on-chip flash memory. The  $\mu$ PC29S00 series is use of erasing and writing data on its flash memory.

#### FEATURES

- ON/OFF control function (Active high)
  - Output current excess of 100 mA
  - Surface mount device package
  - High accuracy output voltage :  $\pm 2\%$  (7.8 V output)  
-2% to +1% (10 V output)
  - On-chip all kinds of protection circuit
- ★ : 4-pin plastic SIP (TO-126 Gullwing) (7.8 V output)  
8-pin plastic SOP (225mil) (7.8 V output, 10 V output)

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

#### ORDERING INFORMATION

Part Number	Package	Output Voltage
$\mu$ PC29S78H	4-pin plastic SIP (TO-126)	7.8 V
$\mu$ PC29S78TA	4-pin plastic SIP (TO-126 Gullwing)	7.8 V
★ $\mu$ PC29S78GR	8-pin plastic SOP (225 mil)	7.8 V
$\mu$ PC29S10GR	8-pin plastic SOP (225 mil)	10 V

#### PIN CONFIGURATIONS (Marking Side)

TO-126


- $\mu$ PC29S78H

TO-126 Gullwing


- $\mu$ PC29S78TA

8-pin plastic SOP (225mil)

- ★ •  $\mu$ PC29S78GR
- $\mu$ PC29S10GR




1: INPUT  
 2: ON/OFF  
 3: GND  
 4: OUTPUT

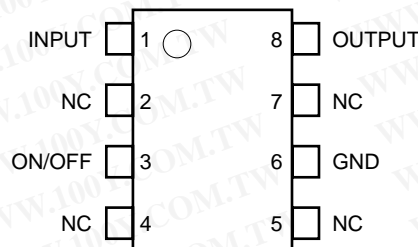

The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.  
 Not all devices/types available in every country. Please check with local NEC representative for availability and additional information.

BLOCK DIAGRAM

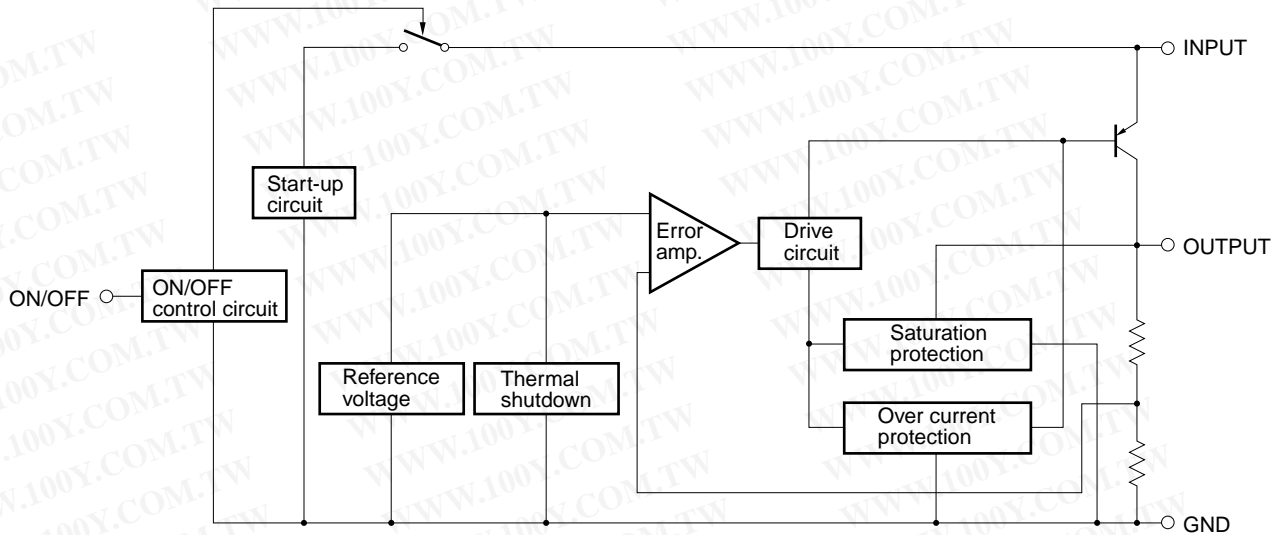

★ ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25°C, unless otherwise specified.)

Parameter	Symbol	Rating		Unit
		μPC29S78H, 29S78TA	μPC29S78GR, 29S10GR	
Input Voltage	V <sub>IN</sub>	20		V
Internal Power Dissipation	P <sub>T</sub> Note	1.2	0.48	W
Operating Ambient Temperature	T <sub>A</sub>	-30 to +85		°C
Operating Junction Temperature	T <sub>J</sub>	-30 to +150		°C
Storage Temperature	T <sub>stg</sub>	-55 to +150		°C
Thermal Resistance (Junction to Ambient)	R <sub>th (J-A)</sub>	104	260	°C/W


**Note** T<sub>A</sub> ≤ 25°C, Internally limited

When operating junction temperature rises up to 150°C, the internal circuit shutdown output voltage.

**Caution** Exposure to Absolute Maximum Ratings for extended periods may affect device reliability; exceeding the ratings could cause permanent damage. The parameters apply independently. The device should be operated within the limits specified under DC and AC Characteristics.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

TYPICAL CONNECTION

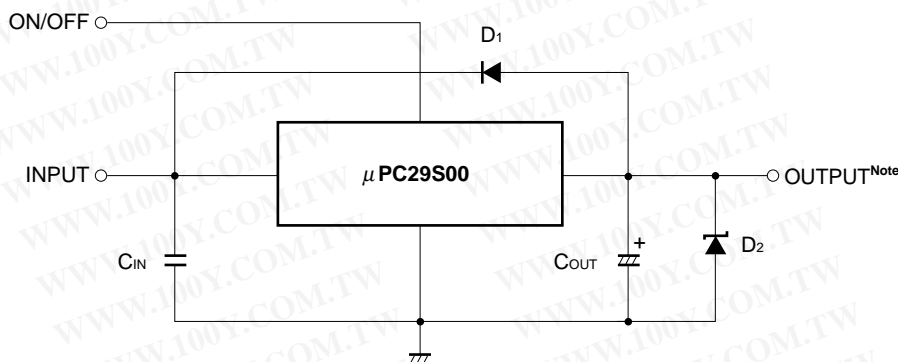

- C<sub>IN</sub> : 0.1 to 0.47 μF. Be sure to connect to prevent abnormal oscillation. For using capacitors, film capacitors whose voltage and temperature characteristics are excellent are recommended. Take care that some monolithic ceramic capacitor is inferior in the temperature and voltage characteristics. When using the monolithic ceramic capacitor, the C<sub>IN</sub> needs to be held these capacities in voltage and temperature used.
- C<sub>OUT</sub> : 10 μF or higher. Be sure to connect to prevent oscillation and to improve the transient load stabilization.

**Remark** Connect the C<sub>IN</sub> and C<sub>OUT</sub> to IC pins as close as possible (2 cm or less).

- D<sub>1</sub> : Need for V<sub>O</sub> > V<sub>IN</sub>
- D<sub>2</sub> : Need a shottky barrier diode for V<sub>O</sub> < GND.

**Note** When output is off (V<sub>ON/OFF</sub> = low level), OUTPUT pin should not be supplied higher voltage than V<sub>IN</sub> voltage from external.

★ **Caution** When using the μPC29S78GR and μPC29S10GR, design your circuit and mounting with consideration for heat radiation.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

RECOMMENDED OPERATING CONDITIONS

Parameter	Symbol	Condition	MIN.	TYP.	MAX.	Unit
Input Voltage	V <sub>IN</sub>	μPC29S78	8.8		18	V
		μPC29S10	11		18	V
Output Current	I <sub>o</sub>		0		100	mA
Operating Ambient Temperature	T <sub>A</sub>		-30		+85	°C
Operating Junction Temperature	T <sub>J</sub>		-30		+125	°C

**Caution** If the Absolute Maximum Rating is not exceeded, there is no problem for using recommended operating range or more. Use and evaluate the μPC29S00 Series since the leeway is decreased with the Absolute Maximum Rating. Moreover, the recommended operating range is not prescribed to use when all parameters are maximum value.

ELECTRICAL CHARACTERISTICS

μPC29S78 (V<sub>IN</sub> = 12 V, I<sub>o</sub> = 50 mA, V<sub>ON/OFF</sub> = 5 V, T<sub>J</sub> = 25°C, unless otherwise specified.)

Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output Voltage	V <sub>o</sub>		7.64	7.8	7.96	V
		8.5 V ≤ V <sub>IN</sub> ≤ 18 V, 0 mA ≤ I <sub>o</sub> ≤ 50 mA, 0°C ≤ T <sub>J</sub> ≤ +125°C	7.56		8.04	
		0 mA ≤ I <sub>o</sub> ≤ 100 mA, 0°C ≤ T <sub>J</sub> ≤ +125°C	7.56		8.04	
Line Regulation	REG <sub>IN</sub>	8.8 V ≤ V <sub>IN</sub> ≤ 18 V		22	75	mV
Load Regulation	REG <sub>L</sub>	0 mA ≤ I <sub>o</sub> ≤ 100 mA		21	75	mV
Quiescent Current	I <sub>BIAS</sub>	I <sub>o</sub> = 0 mA		3.0	5.0	mA
		I <sub>o</sub> = 100 mA		11	25	
Start-up Quiescent Current	I <sub>BIAS(s)1</sub>	V <sub>IN</sub> = 7.3 V, I <sub>o</sub> = 0 mA		10	20	mA
	I <sub>BIAS(s)2</sub>	V <sub>IN</sub> = 7.3 V, I <sub>o</sub> = 100 mA			50	mA
Quiescent Current Change	ΔI <sub>BIAS</sub>	8.8 V ≤ V <sub>IN</sub> ≤ 18 V, 0°C ≤ T <sub>J</sub> ≤ +125°C			10	mA
Output Noise Voltage	V <sub>n</sub>	10 Hz ≤ f ≤ 100 kHz		160		μV <sub>r.m.s.</sub>
Ripple Rejection	R·R	f = 120 Hz, 8.8 V ≤ V <sub>IN</sub> ≤ 13.5 V	42	51		dB
Dropout Voltage	V <sub>DIF</sub>	I <sub>o</sub> = 100 mA, 0°C ≤ T <sub>J</sub> ≤ +125°C			1.0	V
Peak Output Current	I <sub>o peak</sub>	V <sub>IN</sub> = 9.8 V	150	250	400	mA
Short Circuit Current	I <sub>o short</sub>	V <sub>IN</sub> = 18 V		250		mA
Temperature Coefficient of Output Voltage	ΔV <sub>o</sub> /ΔT	I <sub>o</sub> = 5 mA, 0°C ≤ T <sub>J</sub> ≤ +125°C		-0.4		mV/°C
ON/OFF Voltage	V <sub>ON/OFF1</sub>	V <sub>IN</sub> = 12 V, I <sub>o</sub> = 10 mA		1.8	2.0	V
	V <sub>ON/OFF2</sub>	V <sub>IN</sub> = 12 V, I <sub>o</sub> = 0 mA	0.8	1.6		V
ON/OFF Current	I <sub>ON/OFF1</sub>	V <sub>ON/OFF</sub> = 2.7 V, I <sub>o</sub> = 0 mA		250	450	μA
	I <sub>ON/OFF2</sub>	V <sub>ON/OFF</sub> = 5 V, I <sub>o</sub> = 0 mA		450	800	μA
Standby Current	I <sub>BIAS OFF</sub>	V <sub>ON/OFF</sub> = 0 V, I <sub>o</sub> = 0 mA			10	μA

μPC29S10 ( $V_{IN} = 12\text{ V}$ ,  $I_o = 50\text{ mA}$ ,  $V_{ON/OFF} = 5\text{ V}$ ,  $T_J = 25^\circ\text{C}$ , unless otherwise specified.)


Parameter	Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Output Voltage	$V_o$		9.80	10.00	10.10	V
		$11\text{ V} \leq V_{IN} \leq 18\text{ V}$ , $0\text{ mA} \leq I_o \leq 50\text{ mA}$ , $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$	9.70		10.20	
		$0\text{ mA} \leq I_o \leq 100\text{ mA}$ , $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$	9.70		10.20	
Line Regulation	$REG_{IN}$	$11\text{ V} \leq V_{IN} \leq 18\text{ V}$		27	100	mV
Load Regulation	$REG_L$	$0\text{ mA} \leq I_o \leq 100\text{ mA}$		18	100	mV
Quiescent Current	$I_{BIAS}$	$I_o = 0\text{ mA}$		3.3	5.0	mA
		$I_o = 100\text{ mA}$		12	25	
Start-up Quiescent Current	$I_{BIAS(s)1}$	$V_{IN} = 9.5\text{ V}$ , $I_o = 0\text{ mA}$		10	20	mA
	$I_{BIAS(s)2}$	$V_{IN} = 9.5\text{ V}$ , $I_o = 100\text{ mA}$			50	
Quiescent Current Change	$\Delta I_{BIAS}$	$11\text{ V} \leq V_{IN} \leq 18\text{ V}$ , $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$		1.0	10	mA
Output Noise Voltage	$V_n$	$10\text{ Hz} \leq f \leq 100\text{ kHz}$		210		$\mu\text{V}_{r.m.s.}$
Ripple Rejection	R·R	$f = 120\text{ Hz}$ , $11\text{ V} \leq V_{IN} \leq 13.5\text{ V}$	40	48		dB
Dropout Voltage	$V_{DIF}$	$I_o = 100\text{ mA}$ , $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$		0.4	1.0	V
Peak Output Current	$I_{o\text{ peak}}$	$V_{IN} = 12\text{ V}$	150	250	400	mA
Short Circuit Current	$I_{o\text{ short}}$	$V_{IN} = 18\text{ V}$		180		mA
Temperature Coefficient of Output Voltage	$\Delta V_o/\Delta T$	$I_o = 5\text{ mA}$ , $0^\circ\text{C} \leq T_J \leq +125^\circ\text{C}$		-0.5		$\text{mV}/^\circ\text{C}$
ON/OFF Voltage	$V_{ON/OFF1}$	$V_{IN} = 12\text{ V}$ , $I_o = 10\text{ mA}$		1.8	2.0	V
	$V_{ON/OFF2}$	$V_{IN} = 12\text{ V}$ , $I_o = 0\text{ mA}$	0.8	1.6		
ON/OFF Current	$I_{ON/OFF1}$	$V_{ON/OFF} = 2.7\text{ V}$ , $I_o = 0\text{ mA}$		250	450	$\mu\text{A}$
	$I_{ON/OFF2}$	$V_{ON/OFF} = 5\text{ V}$ , $I_o = 0\text{ mA}$		450	800	
Standby Current	$I_{BIAS\text{ OFF}}$	$V_{ON/OFF} = 0\text{ V}$ , $I_o = 0\text{ mA}$			10	$\mu\text{A}$

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)


勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**TYPICAL CHARACTERISTICS (REFERENCE VALUES)**


★  $P_T$  vs  $T_A$

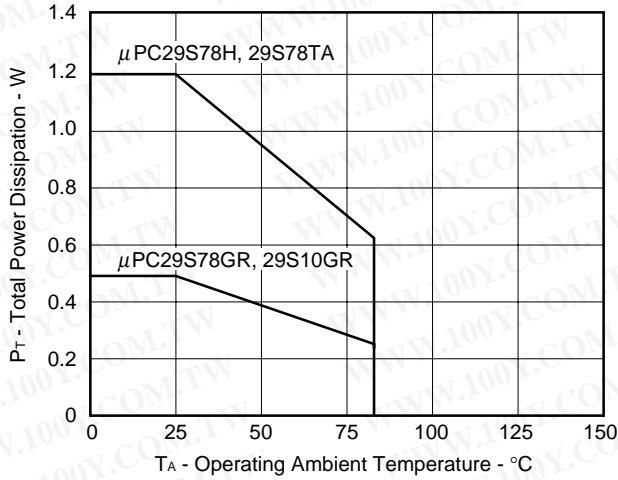


$V_O$  vs  $V_{IN}$

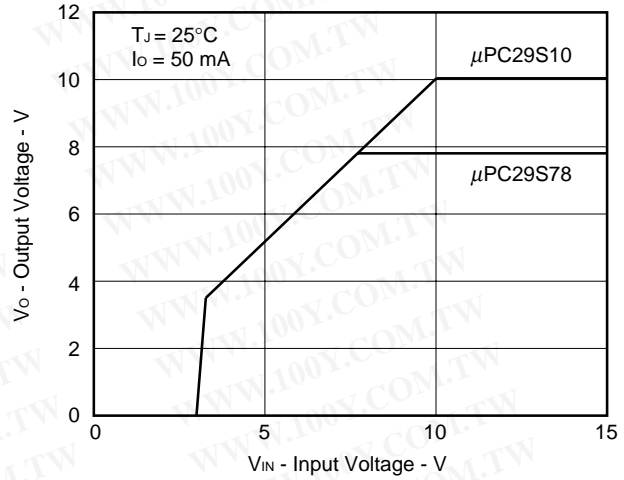


$I_{BIAS}$  ( $I_{BIAS(s)}$ ) vs  $V_{IN}$  ( $\mu\text{PC29S78}$ )

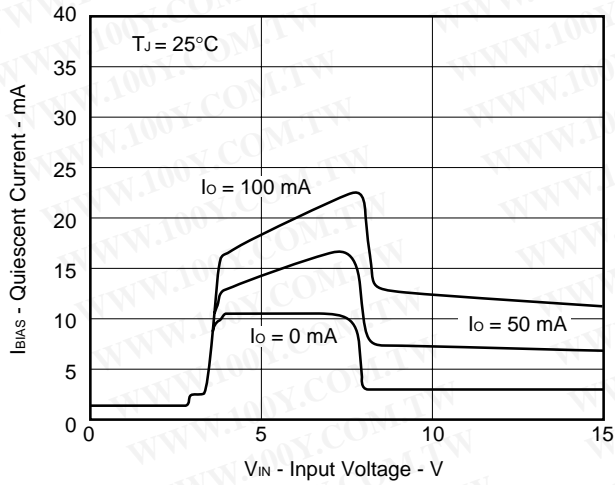


$I_{BIAS}$  ( $I_{BIAS(s)}$ ) vs  $V_{IN}$  ( $\mu\text{PC29S10}$ )




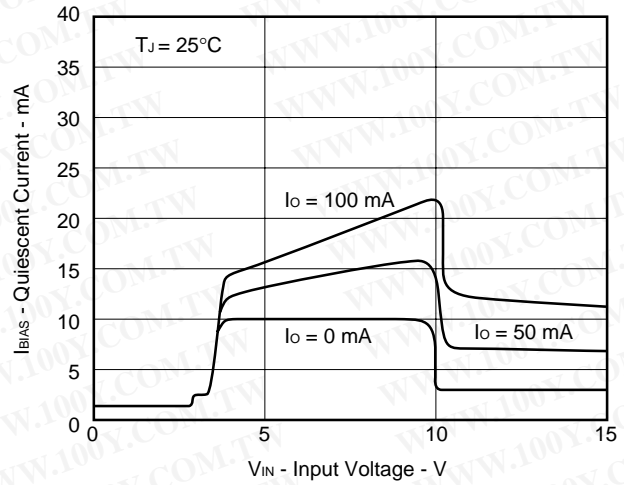


$V_O$  vs  $V_{ON/OFF}$

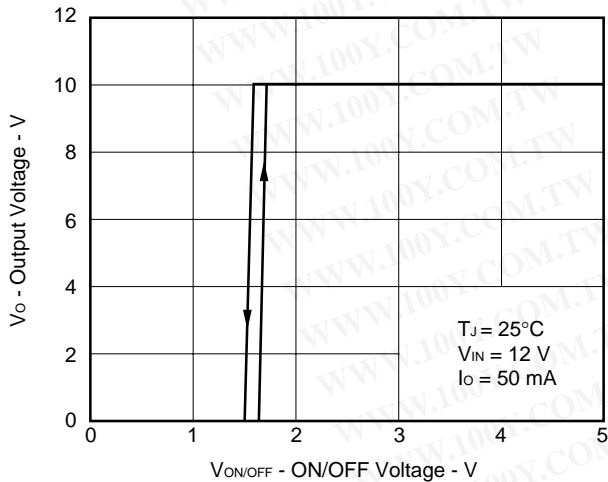

$\Delta V_O$  vs  $T_J$

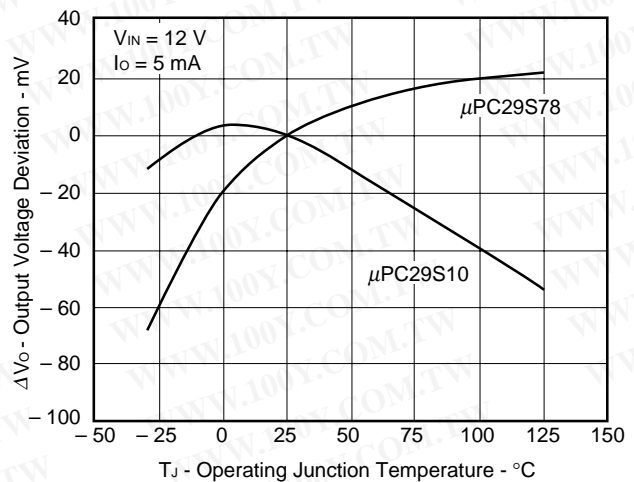


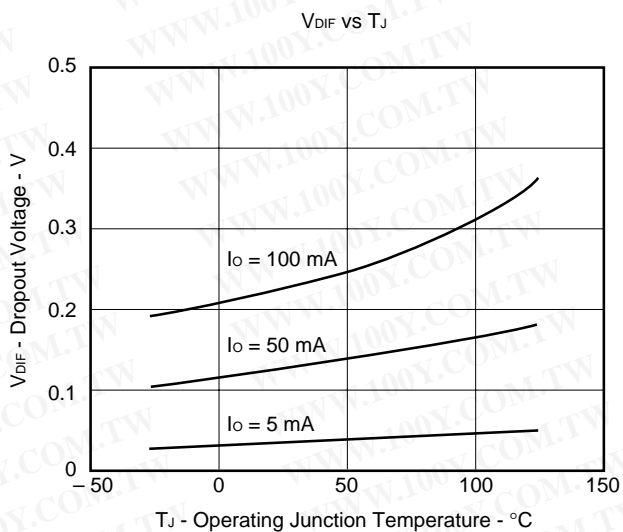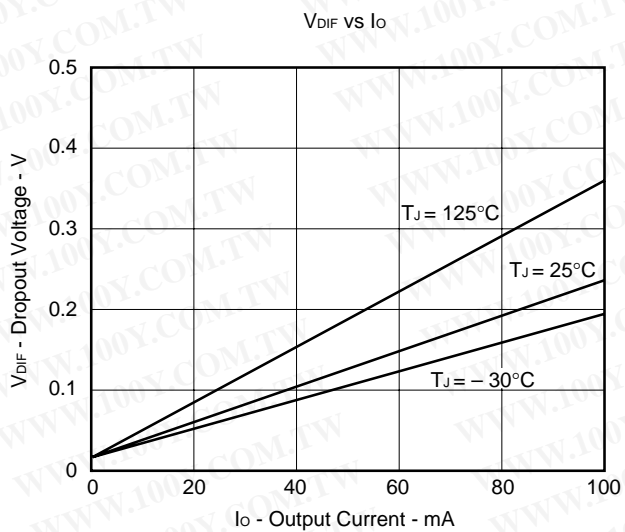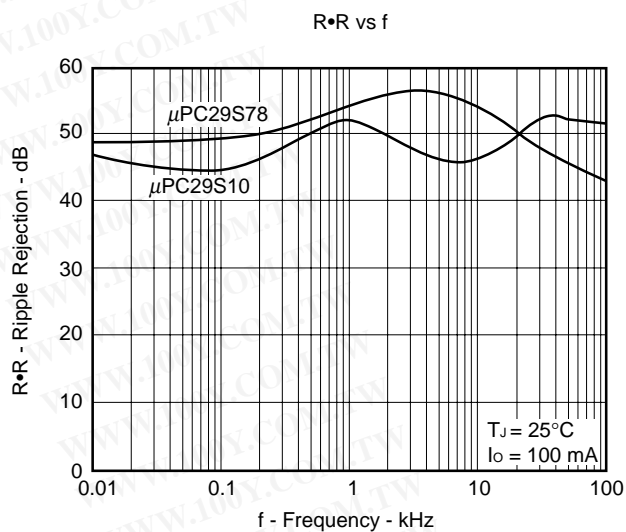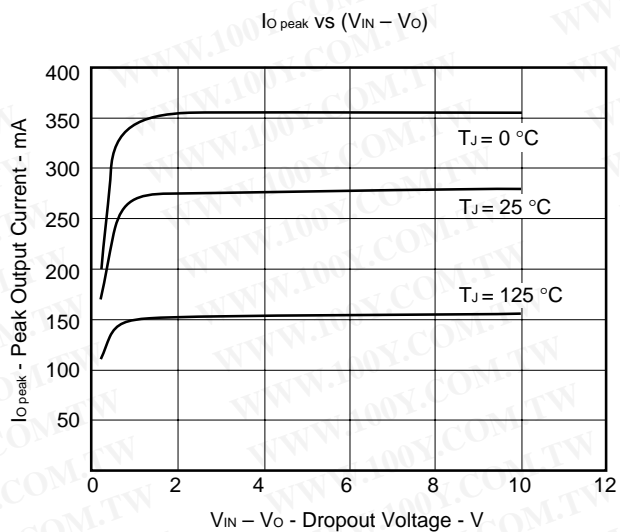

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

PACKAGE DRAWINGS

4 PIN PLASTIC SIP (TO-126)

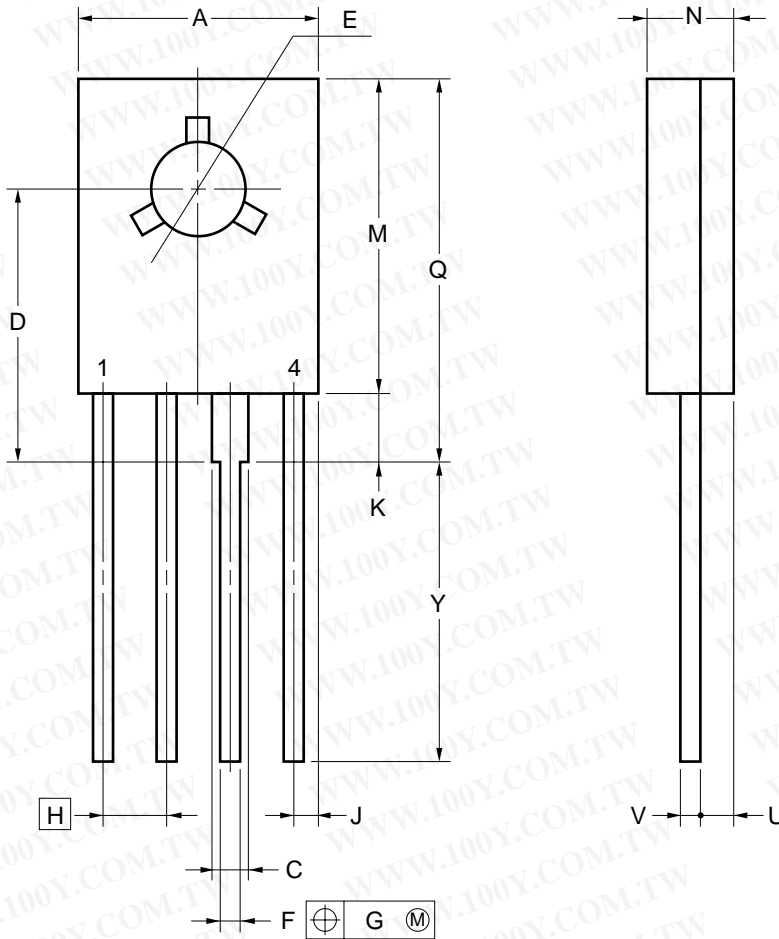

NOTE

Each lead centerline is located within 0.2 mm (0.008 inch) of its true position (T.P.) at maximum material condition.



勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

ITEM	MILLIMETERS	INCHES
A	8.5 MAX.	0.335 MAX.
C	1.1 MIN.	0.043 MIN.
D	9.7±0.3	0.382±0.012
E	φ3.2±0.1	φ0.126±0.004
F	0.65±0.1	0.026 <sup>+0.004</sup> <sub>-0.005</sub>
G	0.2	0.008
H	2.0	0.079
J	1.25 MAX.	0.05 MAX.
K	2.3 MIN.	0.09 MIN.
M	11.5 MAX.	0.453 MAX.
N	2.7±0.2	0.106 <sup>+0.009</sup> <sub>-0.008</sub>
Q	14.5 MAX.	0.571 MAX.
U	1.7 MAX.	0.067 MAX.
V	0.55±0.1	0.022 <sup>+0.004</sup> <sub>-0.005</sub>
Y	13.5±0.7	0.531 <sup>+0.029</sup> <sub>-0.028</sub>

P4HP-200B-1




4 PIN PLASTIC SIP (TO-126 GULLWING)

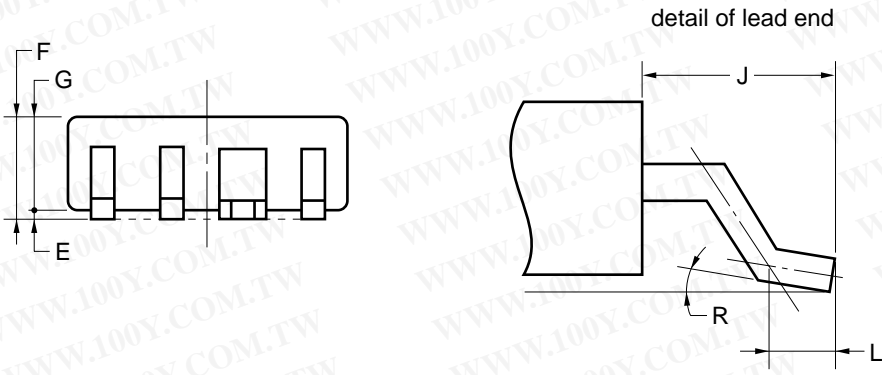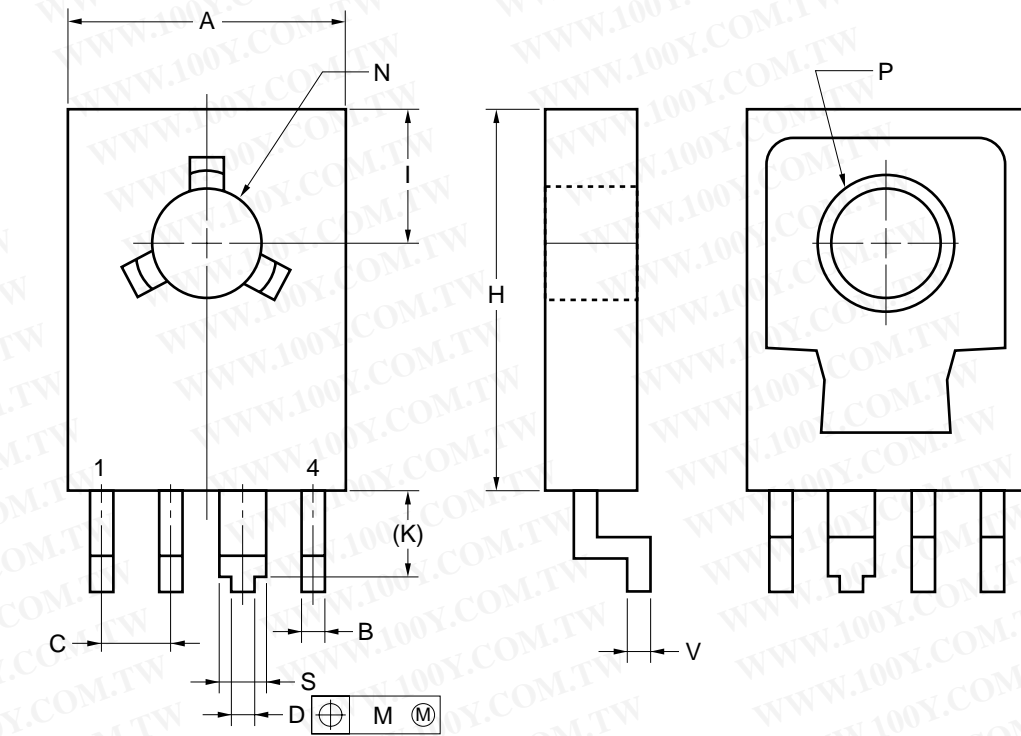

ITEM	MILLIMETERS
A	8.0±0.2
B	0.65±0.1
C	2.0±0.3
D	0.65±0.1
E	0.25±0.15
F	3.2 MAX.
G	2.7±0.1
H	11.0±0.2
I	3.8
J	3.0±0.5
K	2.5
L	1.3±0.3
M	0.18
N	3.2±0.1
P	φ4.0
R	3°+5° -3°
S	1.25±0.1
V	0.55±0.1

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

8 PIN PLASTIC SOP (225 mil)

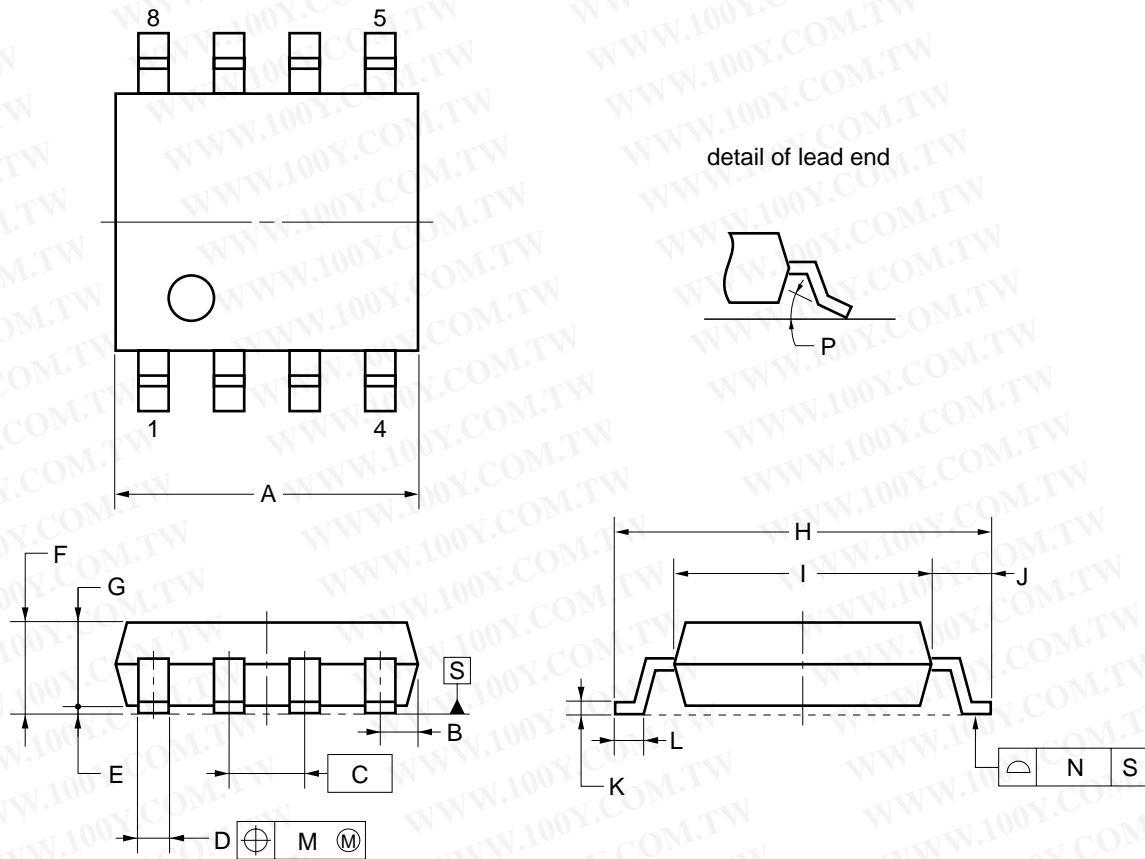

NOTE

Each lead centerline is located within 0.12 mm of its true position (T.P.) at maximum material condition.

ITEM	MILLIMETERS
A	5.2 <sup>+0.17</sup> <sub>-0.20</sub>
B	0.78 MAX.
C	1.27 (T.P.)
D	0.42 <sup>+0.08</sup> <sub>-0.07</sub>
E	0.1±0.1
F	1.59±0.21
G	1.49
H	6.5±0.3
I	4.4±0.15
J	1.1±0.2
K	0.17 <sup>+0.08</sup> <sub>-0.07</sub>
L	0.6±0.2
M	0.12
N	0.10
P	3 <sup>+7°</sup> <sub>-3°</sub>

S8GM-50-225B-5

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**RECOMMENDED SOLDERING CONDITIONS**

When soldering these products, it is highly recommended to observe the conditions as shown below. If other soldering processes are used, or if the soldering is performed under different conditions, please make sure to consult with our sales offices.

For more details, refer to our document “SEMICONDUCTOR DEVICE MOUNTING TECHNOLOGY MANUAL” (C10535E).

**Surface mount devices**

**μPC29S78TA: 4-pin plastic SIP (TO-126 Gullwing)**

Process	Conditions	Symbol
Infrared ray reflow	Peak temperature: 235°C or below (Package surface temperature), Reflow time: 30 seconds or less (at 210°C or higher), Maximum number of reflow processes: 2 times.	IR35-00-2
VPS	Peak temperature: 215°C or below (Package surface temperature), Reflow time: 40 seconds or less (at 200°C or higher), Maximum number of reflow processes: 2 times.	VP15-00-2
Wave soldering	Solder temperature: 260°C or below, Flow time: 10 seconds or less, Maximum number of flow processes: 1 time, Pre-heating temperature: 120°C or below (Package surface temperature).	WS60-00-1
Partial heating method	Pin temperature: 300°C or below, Heat time: 3 seconds or less (Per each side of the device).	—

**Caution** Apply only one kind of soldering condition to a device, except for “partial heating method”, or the device will be damaged by heat stress.

★

**μPC29S78GR, 29S10GR: 8-pin plastic SOP (225 mil)**

Process	Conditions	Symbol
Infrared ray reflow	Peak temperature: 235°C or below (Package surface temperature), Reflow time: 30 seconds or less (at 210°C or higher), Maximum number of reflow processes: 3 times.	IR35-00-3
VPS	Peak temperature: 215°C or below (Package surface temperature), Reflow time: 40 seconds or less (at 200°C or higher), Maximum number of reflow processes: 3 times.	VP15-00-3
Wave soldering	Solder temperature: 260°C or below, Flow time: 10 seconds or less, Maximum number of flow processes: 1 time, Pre-heating temperature: 120°C or below (Package surface temperature).	WS60-00-1
Partial heating method	Pin temperature: 300°C or below, Heat time: 3 seconds or less (Per each side of the device).	—

**Caution** Apply only one kind of soldering condition to a device, except for “partial heating method”, or the device will be damaged by heat stress.

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**Through-hole device**

**μPC29S78H: 4-pin plastic SIP (TO-126)**

Process	Conditions
Wave soldering (only to leads)	Solder temperature: 260°C or below, Flow time: 10 seconds or less.
Partial heating method	Pin temperature: 300°C or below, Heat time: 3 seconds or less (per each lead).

**Caution** For through-hole device, the wave soldering process must be applied only to leads, and make sure that the package body does not get jet soldered.

**CAUTION ON USE**

When using the μPC29S00 series at the input voltage which is lower than in the recommended operating condition, the big quiescent current flows through device because the transistor of the output paragraph is saturated (Refer to I<sub>BIAS</sub> (I<sub>BIAS(s)</sub>) vs V<sub>IN</sub> curves in **TYPICAL CHARACTERISTICS**). The μPC29S00 series has saturation protection circuits, but they sometimes need about 50 mA current. Therefore the power supply on the input needs the enough current capacity to pass this quiescent current when the device start-up.

**REFERENCE DOCUMENTS**

QUALITY GRADES ON NEC SEMICONDUCTOR DEVICES  
 SEMICONDUCTOR DEVICE MOUNTING TECHNOLOGY MANUAL  
 SEMICONDUCTORS SELECTION GUIDE

C11531E  
 C10535E  
 X10679E

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

[MEMO]

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

[MEMO]

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

[MEMO]

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## [MEMO]

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

- **The information in this document is subject to change without notice. Before using this document, please confirm that this is the latest version.**
  - No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Corporation. NEC Corporation assumes no responsibility for any errors which may appear in this document.
  - NEC Corporation does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from use of a device described herein or any other liability arising from use of such device. No license, either express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Corporation or others.
  - Descriptions of circuits, software, and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software, and information in the design of the customer's equipment shall be done under the full responsibility of the customer. NEC Corporation assumes no responsibility for any losses incurred by the customer or third parties arising from the use of these circuits, software, and information.
  - While NEC Corporation has been making continuous effort to enhance the reliability of its semiconductor devices, the possibility of defects cannot be eliminated entirely. To minimize risks of damage or injury to persons or property arising from a defect in an NEC semiconductor device, customers must incorporate sufficient safety measures in its design, such as redundancy, fire-containment, and anti-failure features.
  - NEC devices are classified into the following three quality grades:  
"Standard", "Special", and "Specific". The Specific quality grade applies only to devices developed based on a customer designated "quality assurance program" for a specific application. The recommended applications of a device depend on its quality grade, as indicated below. Customers must check the quality grade of each device before using it in a particular application.
    - Standard: Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots
    - Special: Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support)
    - Specific: Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems or medical equipment for life support, etc.
- The quality grade of NEC devices is "Standard" unless otherwise specified in NEC's Data Sheets or Data Books. If customers intend to use NEC devices for applications other than those specified for Standard quality grade, they should contact an NEC sales representative in advance.