

DOUBLE USB/A FEMALE/90° DIP TYPE

MATERIAL SPECIFICATION

SHELL	COPPER ALLOY
HOUSING	THERMOPLASTIC, UL94V-0
COLOR	WHITE OR BLACK
CONTACT	COPPER ALLOY

ELECTRICAL CHARACTERISTIC

VOLTAGE CURRENT RATING	1AMP, 30V AC
INSULATION RESISTANCE	1000 mΩ Min.
CONTACT RESISTANCE	30mΩ Max.
DIELECTRIC WITHSTANDING VOLTAGE	AC 500V R.M.S.
TEMPERATURE RANGE	-20°C TO +85°C






PART NO. SPECIFICATION


USAF-08*N-*R01

W : WHITE
B : BLACK
1 : Au 1U"
6 : Au 30U"


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

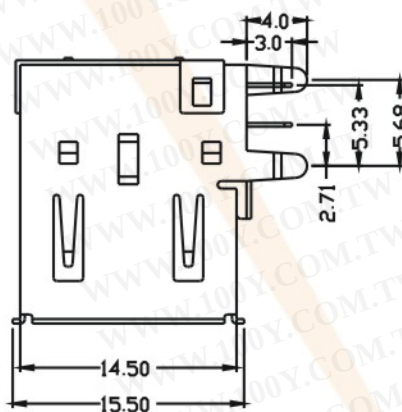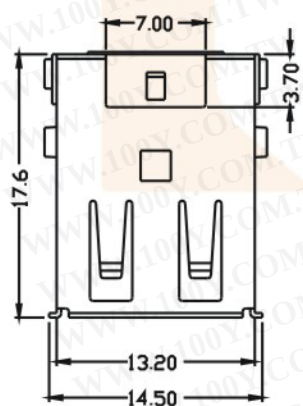



USAF-08*N-*R02



USAF-08*N-*R08



USAF-08*N-*R03

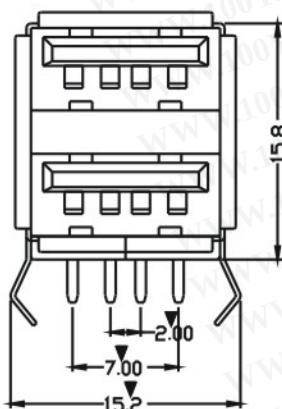

P.C.B LAYOUT

DOUBLE USB/A FEMALE/90° DIP TYPE

MATERIAL SPECIFICATION

SHELL	COPPER ALLOY
HOUSING	THERMOPLASTIC, UL94V-0
COLOR	WHITE OR BLACK
CONTACT	COPPER ALLOY




ELECTRICAL CHARACTERISTIC

VOLTAGE CURRENT RATING	1AMP, 30V AC
INSULATION RESISTANCE	1000 mΩ Min.
CONTACT RESISTANCE	30mΩ Max.
DIELECTRIC WITHSTANDING VOLTAGE	AC 500V R.M.S.
TEMPERATURE RANGE	-20°C TO +85°C



PART NO. SPECIFICATION

U S A F - 08 * N - * R 0 6




W : WHITE
B : BLACK
1 : Au 1U"
6 : Au 30U"



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



U S A F - 08 * N - * R 30

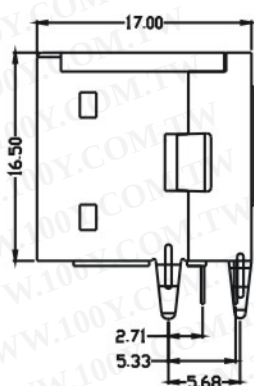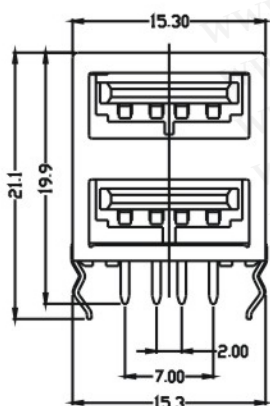


DOUBLE USB/A FEMALE/180° DIP TYPE

MATERIAL SPECIFICATION

SHELL	COPPER ALLOY
HOUSING	THERMOPLASTIC, UL94V-0
COLOR	WHITE OR BLACK
CONTACT	COPPER ALLOY

ELECTRICAL CHARACTERISTIC

VOLTAGE CURRENT RATING	1AMP, 30V AC
INSULATION RESISTANCE	1000 mΩ Min.
CONTACT RESISTANCE	30mΩ Max.
DIELECTRIC WITHSTANDING VOLTAGE	AC 500V R.M.S.
TEMPERATURE RANGE	-20°C TO +85°C



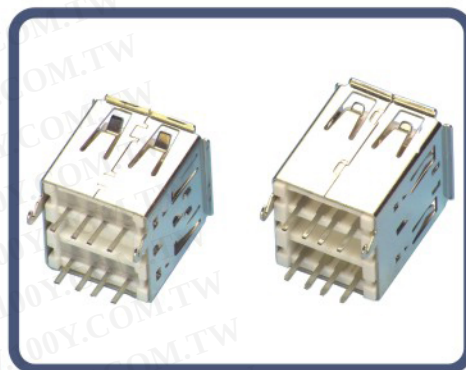


PART NO. SPECIFICATION



U S A F - 08 * N - * P 0 2

W : WHITE
B : BLACK

1 : Au 1U"
6 : Au 30U"

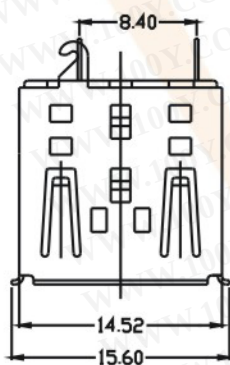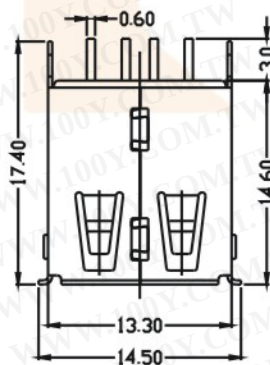

P.C.B LAYOUT




U S A F - 08 * N - * P30

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

DOUBLE USB/A FEMALE/180° DIP TYPE

MATERIAL SPECIFICATION

SHELL	COPPER ALLOY
HOUSING	THERMOPLASTIC, UL94V-0
COLOR	WHITE OR BLACK
CONTACT	COPPER ALLOY

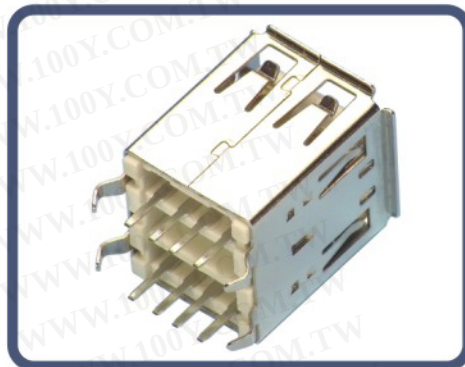




ELECTRICAL CHARACTERISTIC

VOLTAGE CURRENT RATING	1AMP, 30V AC
INSULATION RESISTANCE	1000 mΩ Min.
CONTACT RESISTANCE	30mΩ Max.
DIELECTRIC WITHSTANDING VOLTAGE	AC 500V R.M.S.
TEMPERATURE RANGE	-20°C TO +85°C


PART NO. SPECIFICATION

U S A F - 08 * N - * P 3 0

W : WHITE
B : BLACK
1 : Au 1U"
6 : Au 30U"

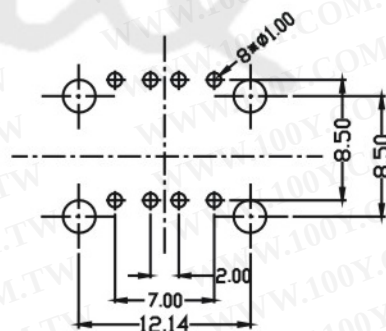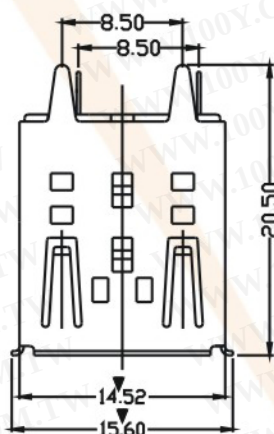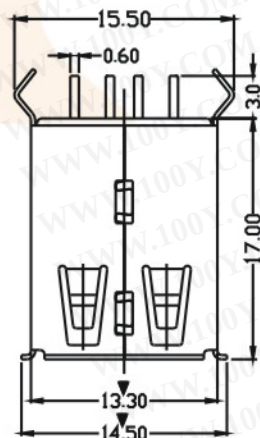

P.C.B LAYOUT



勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

USB A TYPE FEMALE CONNECTOR