

USB/A 4P FEMALE/90° DIP TYPE

MATERIAL SPECIFICATION

SHELL	COPPER ALLOY
HOUSING	THERMOPLASTIC, UL94V-0
COLOR	WHITE OR BLACK
CONTACT	COPPER ALLOY

ELECTRICAL CHARACTERISTIC

VOLTAGE CURRENT RATING	1AMP, 30V AC
INSULATION RESISTANCE	1000 mΩ Min.
CONTACT RESISTANCE	30mΩ Max.
DIELECTRIC WITHSTANDING VOLTAGE	AC 500V R.M.S.
TEMPERATURE RANGE	-20°C TO +85°C









PART NO. SPECIFICATION

USAF-04 * N - * R00

W : WHITE
B : BLACK

1 : Au 1U"
6 : Au 30U"

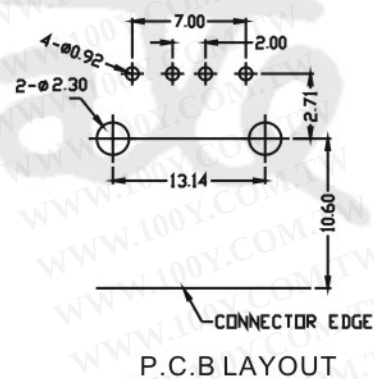


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)




ELECTRICAL CHARACTERISTIC

PART NO.SPECIFICATION

W : WHITE
B : BLACK
1 : Au 1U"
6 : Au 30U"



P.C.B LAYOUT
(BOTTOM VIEW)

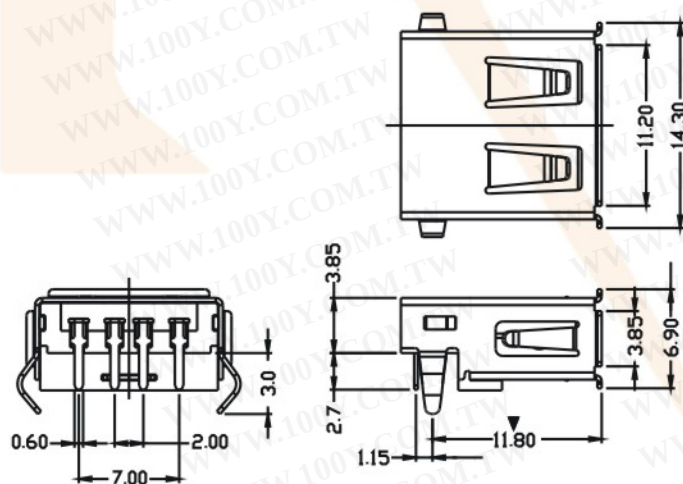

勝特力材料 886-3-5753170
勝特力電子(上海) 86-21-54151736
勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

USB/A 4P FEMALE/90° DIP TYPE

MATERIAL SPECIFICATION

SHELL	COPPER ALLOY
HOUSING	THERMOPLASTIC, UL94V-0
COLOR	WHITE OR BLACK
CONTACT	COPPER ALLOY




ELECTRICAL CHARACTERISTIC

VOLTAGE CURRENT RATING	1AMP, 30V AC
INSULATION RESISTANCE	1000 mΩ Min.
CONTACT RESISTANCE	30mΩ Max.
DIELECTRIC WITHSTANDING VOLTAGE	AC 500V R.M.S.
TEMPERATURE RANGE	-20°C TO +85°C



PART NO. SPECIFICATION

USAF-04 * N - * R 3 2

W : WHITE
B : BLACK
1 : Au 1U"
6 : Au 30U"

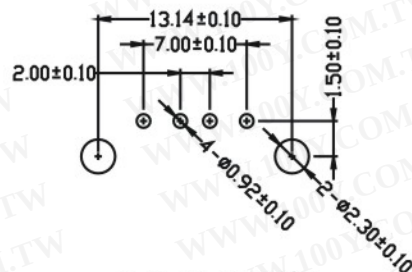

P.C.B LAYOUT

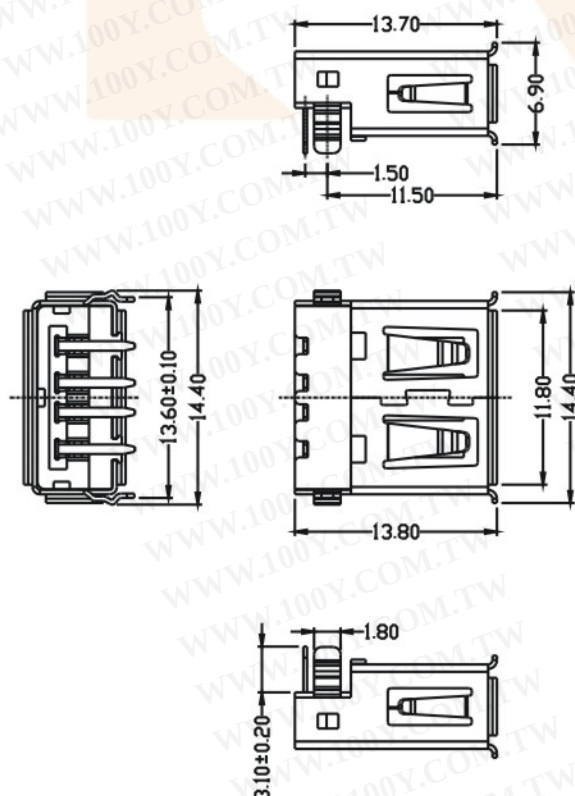

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)